70FW-57E
81FW-57E

SHARP

SERVICE MANUAL

SEJB**FW57E00
Issued: 22nd May 00

DA-100W CHASSIS

PAL / SECAM B/G D/K SYSTEM COLOUR TELEVISION

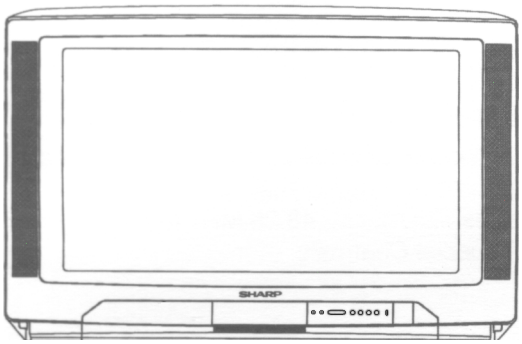

MODELS 70FW-57E 81FW-57E

In the interests of user safety (required by safety regulations in some countries) the set should restored to its original condition and only parts identical to those specified should be used.

CONTENTS

ELECTRICAL SPECIFICATION.....2
IMPORTANT SERVICE NOTES.....3
SERVICE ADJUSTEMENTS.....4
PRINTED WIRING BOARDS.....7
SCHEMATIC DIAGRAM.....15
BLOCK DIAGRAM.....34
PART LIST.....37
DIGITAL MODULE CHANGE PROCEDURE...51

SHARP CORPORATION

This document has been published to be used for after sales service only.

ELECTRICAL SPECIFICATIONS

•Power Input .....220V-240 Volts AC 50Hz

•Power Consumption
Normal Operating.....170W (70FW57E)
180W (81FW57E)

Stand-by Operating.....1W

•Audio Power Output Rating

Internal Left Speaker.....15W (MPO)

Internal Right Speaker.....15W (MPO)

Internal Centre Speaker.....15W (MPO)

Speakers

Left / Right.....7Ω 12W, 4 x 13cm

Centre .....7Ω 12W, 6 x 13cm

Convergence.....Self Converging System
Focus.....Bi-Potencial Electrostatic
Sweep Deflection.....Magnetic

•Intermediate Frequencies
L'.....33.9MHz
L, B/G, D/K, I.....38.9MHz

•Sound Carrier Trap
L'.....40.4MHz
L, D/K.....32.4MHz
B/G.....33.4MHz
I.....32.9MHz

•Adjacent Sound Carrier Trap
L'.....32.4MHz
L, D/K, B/G.....40.4MHz
I.....40.9MHz

•Adjacent Picture Carrier Trap
L'.....41.9MHz
L, D/K, I.....30.9MHz
B/G.....31.9MHz

•Aerial Input Impedance
VHF/UHF.....75 ohm Unbalanced

•Tuning Ranges.....48.25MHz to 855.25 MHz
CATV Special Channels

•White Level
Set brightness control to get total picture tube cathode current of 600 milliamperes under no signal condition. Maximum necessary correction of each picture tube cathode current to get 8550 degrees K+1MPCD screen temperature should not exceed 15% of its original value.
X=0.290 Y=0.300

Specifictions are subject to change without prior notice.

WARNING

The chassis in this receiver is partially hot. Use an isolation transformer between the line cord plug and power receptable, when servicing this chassis.
To prevent electric shock, do not remove cover. No user-serviceable parts inside. Refer servicing to qualified sercice personnel.

IMPORTANT SERVICE NOTES

Maintenance and repair of this receiver should be done by qualified service personnel only.

SERVICING OF HIGH VOLTAGE SYSTEM AND PICTURE TUBE

When servicing the high voltage system, remove static charge from it by connecting a 10K ohm resistor in series with an insulated wire (such as test probe) between picture tube ground tag and high voltage lead. (AC line cord should be disconnected from AC outlet).

1. Picture tube this receiver employs Integral Implosion protection.
2. Replace with tube of the same type number for continued safety.
3. Do not lift picture tube by the neck.
4. Handle the picture tube only when wearing shatterproof goggles and after discharging the high voltage completely.

X-RAY

This receiver is designed so that any X-Ray radiation is kept to an absolute minimum. Since certain malfunctions are servicing may produce potentially hazardous radiation with prolonged exposure at close range, the following precautions should be observed:

1. When repairing the circuit, be sure not to increase the high voltage to more than 32 KV, (at beam 1300μA) for the set.
2. To keep the set in a normal operation, be sure to make it function on 29KV±1KV (at beam 1300μA) in the case of the set. The set has been factory - adjusted to the above mentioned high voltage. If there is a possibility that high voltage fluctuates as a result of the repairs, never forget to check for such high voltage after the work.
3. Do not substitute a picture tube with unauthorized types and/or brands which may cause excess X-Ray radiation.

BEFORE RETURNING THE RECEIVER

In addition to the checks necessary as a result of a repair having been carried out, the following additional safety checks should also be made before returning the units to the user.

1. Inspect all lead dress to make certain that leads are not pinched or that hardware is not logged between the chassis and other metal parts in the receiver.
2. Inspect all protective devices such as non-metallic control knobs, insulating fish papers, cabinet backs, adjustment and compartment covers or shields, insolation resistor-capacity networks, mechanical insulators etc.

SERVICE ADJUSTMENTS

All the adjustments required for this chassis will be done in Service Mode, except G2 and Focus.

● G2 ADJUSTMENT

1. Receive cross hatch pattern signal.
2. Set contrast to 80/100 and brightness to 40/100.
3. Connect the oscilloscope to the red cathode and adjsust G2 to read 155 V on the cut pulse level as in the drawing:

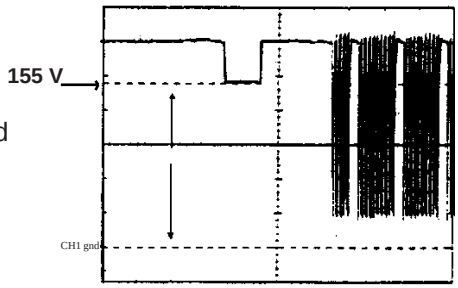

NOTE:
Oscilloscope should be adjusted for vertical TV field trigger and synchronized with wideo signal.

● SERVICE MODE FUNCTION

This mode function is provided to assist with the settings of those adjustments that may vary from one Picture Tube to another, or between models.

In order to use the Service Mode:

1. Connect Test Pattern signal to antenna terminal.
2. Press main switch to «OFF».
3. Press volume-down and channel-up buttons and main switch to «ON» simultaneously.
4. Service mode is now entered.

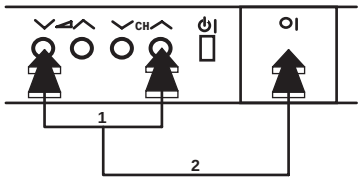

The required adjustments can then be made from the Remote Control Unit.
The only buttons required are the following:
Up/Down-channel for movement in adjustment options menu; Up/Down-volume are used to carry out an adjustment in said menu; ON/OFF is used to memorize a new adjustment.

Adjustment menu is as follows:

-SERVICE SOFTWARE AND HEXADECIMAL COUNTER DISPLAY: «SW ON XXXX SW OFF XXXX HOURS ON XXXX
-HORIZONTAL SHIFT.
-EAST WEST WIDTH.
-PIN PHASE.
-PIN AMP.
-UPPER CORNER CORRECTION.
-LOWER CORNER CORRECTION.
-VERTICAL LINEARITY.
-VERTICAL AMPLITUDE.
-S CORRECTION.
-VERTICAL SHIFT.
-RED GAIN.
-RED CUT OFF.
-GREEN GAIN.
-GREEN CUT OFF.
-BLUE GAIN.
-BLUE CUT OFF.
-ALTER NVM PAGE / ALTER NVM POSITION / ALTER NVM VALUE.
-TELETEXT MIX MODE CONTRAST.
-TELETEXT CONTRAST.
-OSD CONTRAST.
-DVCO ADJUSTMENT (Only PAL).
-DVCO ADJUSTMENT (Only NTSC).
-AGC ADJUSTMENT.
-AFT ADJUSTMENT (BG-I-L)
-AFT ADJUSTMENT (L')
-OPC VALUE (Not Available in this model).
-AUTOINSTALLATION ON/OFF.

To exit service mode, press main switch ot OFF.

Adjustment menu is as follows:

All adjustments for Geometries are based on internal pattern (fig.1)
The procedure for making adjustments is as follows:

Horizontal:
-Adjust HORIZONTAL SHIFT.
-Adjust E-W WIDTH.
-Adjust PIN PHASE.
-Adjust PIN AMPLITUDE.
-Adjust UPPER CORNER CORRECTION.
-Adjust LOWER CORNER CORRECTION.

Vertical:
-Adjust VERTICAL AMPLITUDE.
-Adjust S-CORRECTION.
-Adjust VERTICAL SHIFT.
-Adjust VERTICAL LINEARITY.



Fig.1

1– HORIZONTAL SHIFT

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, picture moves to the left.
c) When volume-down button is pressed, picture moves to the right.
d) Adjust the horizontal location to obtain picture centering (fig. 2).


Fig. 2

2– E-W WIDTH

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, horizontal scanning increases.
c) When volume-down button is pressed, horizontal scanning decreases.
d) Adjust the horizontal amplitude to obtain 9% overscan (fig. 3).


Fig. 3

3– PIN PHASE

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, slide pincushion changes.
c) When volume-down button is pressed, slide pincushion changes.
d) Adjust the PIN PHASE to obtain condition as in (fig. 4).


Fig. 4

4– PIN AMPLITUDE

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, slide pincushion changes from pincushion to barrel shape.
c) When volume-down button is pressed, slide pincushion changes from pincushion to barrel shape.
d) Adjust the PIN AMPLITUDE to obtain condition as in (fig. 5).


Fig. 5

5– UPPER CORNER CORRECTION

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, slide pincushion changes from pincushion to barrel shape.
c) When volume-down button is pressed, slide pincushion changes from barrel shape to pincushion.
d) Adjust the UPPER CORNER CORRECTION to obtain condition as in (fig. 6).


Fig. 6

6– LOWER CORNER CORRECTION

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, slide pincushion changes from pincushion to barrel shape.
c) When volume-down button is pressed, slide pincushion changes from barrel shape to pincushion.
d) Adjust the LOWER CORNER CORRECTION to obtain condition as in (fig. 7).


Fig. 7

7– VERTICAL LINEARITY

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, upper picture scanning decreases and lower picture scanning increase.
c) When volume-down button is pressed, upper picture scanning increases and lower picture scanning decrease.
d) Adjust the vertical symmetry to obtain symmetry scanning between upper and lower picture (fig. 8).


Fig. 8

8– VERTICAL AMPLITUDE

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, vertical size of picture increases.
c) When volume-down button is pressed, vertical size of picture decreases.
d) Adjust the vertical size to obtain overscan (fig. 9).


Fig. 9

9– S-CORRECTION

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, upper and lower scanning decreases, and center scanning increases.
c) When volume-down button is pressed, upper and lower scanning increases, and center scanning decreases.
d) Adjust the S-CORRECTION to obtain a balance between upper, lower and center (fig. 10).


Fig. 10

10– VERTICAL SHIFT

a) Internal pattern signal will be displayed.
b) When volume-up button is pressed, picture moves up.
c) When volume-down button is pressed, picture moves down.
d) Adjust the horizontal location to obtain picture centering (fig. 11).


Fig. 11

COLOUR ADJUSTMENT

The following adjustments are only required when Picture Tube, IC801 or IC1801 are changed:

1. RED CUT OFF / GREEN CUT OFF / BLUE CUT OFF

1.1 Adjust G2.
1.2 Tune a white card.
1.3 Adjust colour to minimum.
1.4 Position colourimeter in the center of screen.
1.5 Adjust brightness and contrast to obtain a luminance of ≈20 NITS.
1.6 Operate in Service Mode and select location RED CUT OFF / GREEN CUT OFF / BLUE CUT OFF, to obtain colour coordinates:

X=0.290 ± 0.015 Y=0.300 ± 0.015

To increase press volume-up button and to decrease press volume down button.

RED CUT OFF	alter «X» coordinate.
GREEN CUT OFF	alter «Y» coordinate.
BLUE CUT OFF	alter «X» and «Y» coordinate.

2. RED GAIN / GREEN GAIN / BLUE BAIN

2.1 Using brightness and contrast buttons, select a luminance of ≈120 NITS.
2.2 Operate in Service Mode and select location RED GAIN / GREEN GAIN / BLUE GAIN, to obtain colour coordinates:

X=0.290 ± 0.015 Y=0.300 ± 0.015

To increase press volume-up button and to decrease press volume down button.

RED CUT OFF	alter «X» coordinate.
GREEN CUT OFF	alter «Y» coordinate.
BLUE CUT OFF	alter «X» and «Y» coordinate.

2.3 Exit Service Mode and check colour coordinates «X» and «Y» at 20 and 120 NITS. It may be necessary to repeat procedure 1 and 2 of COLOUR ADJUSTMENT.

ACCESS TO NVM

Press CH ∧ to move in the following sequence:

ALTER NVM PAG⟹ALTER NVM POS ⟹ALTER VNM VAL to alter presseting adjustments, press up/down-volume buttons on ALTER NVM VAL.

⚠ CAUTION: Do not change NVM VALUE to avoid risk of serious damages to TV set.

CONTRAST ADJUSTMENT

Up/Down volume buttons are used to adjust the contrast of the following items:

-TELETEXT MIX MODE CONTRAST.
-TELETEXT CONTRAST.
-OSD CONTRAST.

DVCO ADJUSTMENT (PAL)

a) Receive Philips pattern signal.
b) When Stand-by button is pressed (Remote Control Unit), start

DVCO ADJUSTMENT (NTSC)

Adjust not required.

AUTO INSTALLATION OFF/ON

When ON is selected, the TV will perform the autoinstallation sequence as soon as service mode is removed.

PROTECTIONS CANCEL

a) Connect Test Pattern signal to antenna terminal.
b) Press main switch to OFF.
c) Press volume-down and channel-up buttons and main switch to ON simultaneously.
d)»Service Software Vxx.xx» appears o screen.
e)Press main switch to OFF.

AGC ADJUSTMENT

a) Tune the TV into CH10 (pattern generator).
b) Adjust the signal strength to 57dB µV
c) Press the stand-by button on the Remote Control (red button).
The TV will perform automatically the AGC.

AFT ADJUSTMENT PAL BG - I, SECAM L

a) Tune the TV into CH69 (pattern generator).
b) Press the stand-by button on the Remote Control (red button).
The TV will perform automatically the AFT.

AFT ADJUSTMENT SECAM L'

a) Tune the TV into CH04 (pattern generator).
b) Press the stand-by button on the Remote Control (red button).
The TV will perform automatically the AFT.

MOTHER UNIT PRINTED WIRING BOARD. Component side.

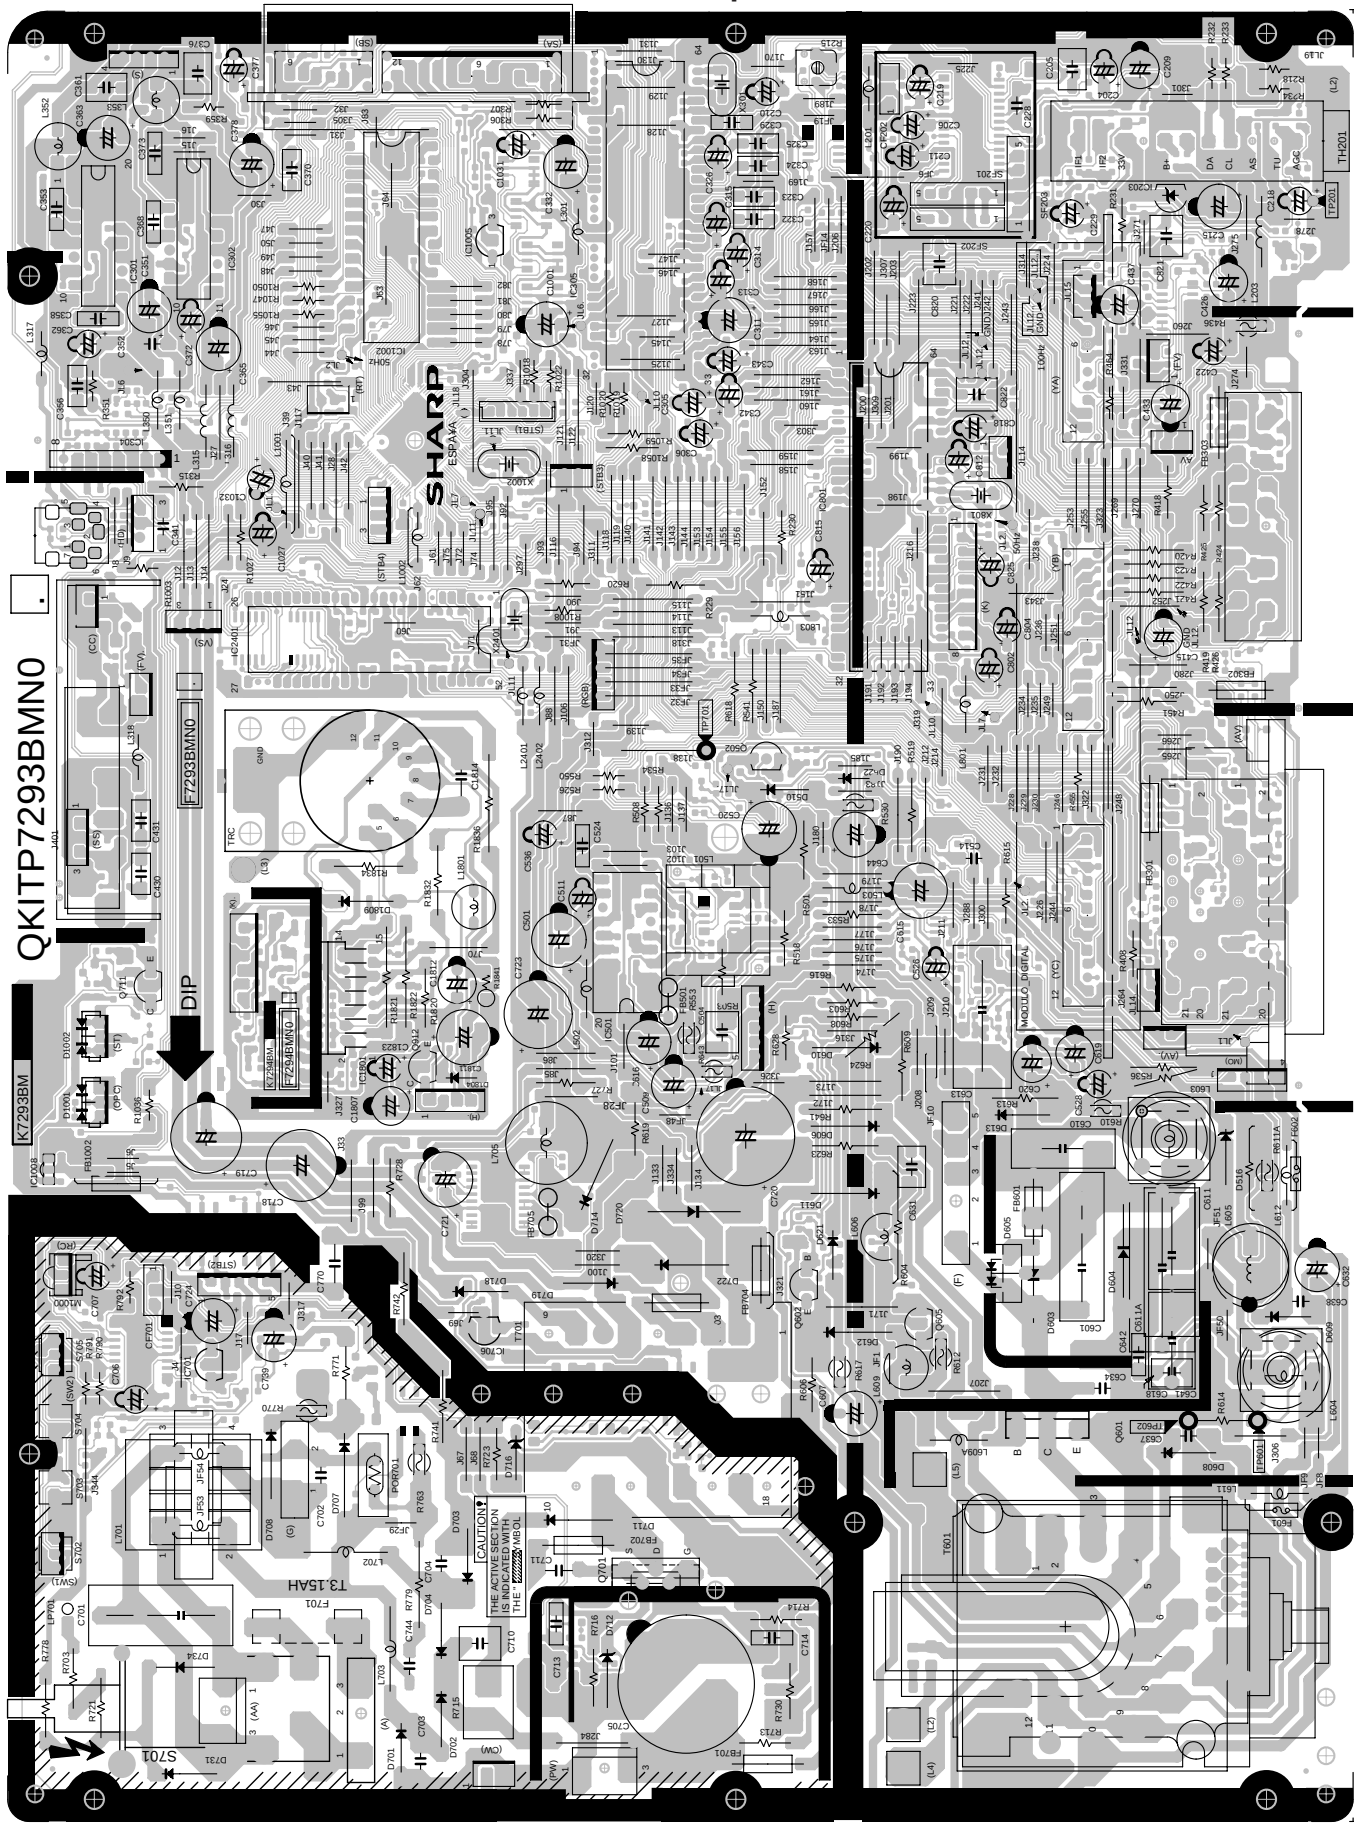

MOTHER UNIT PRINTED WIRING BOARD. Copper side.

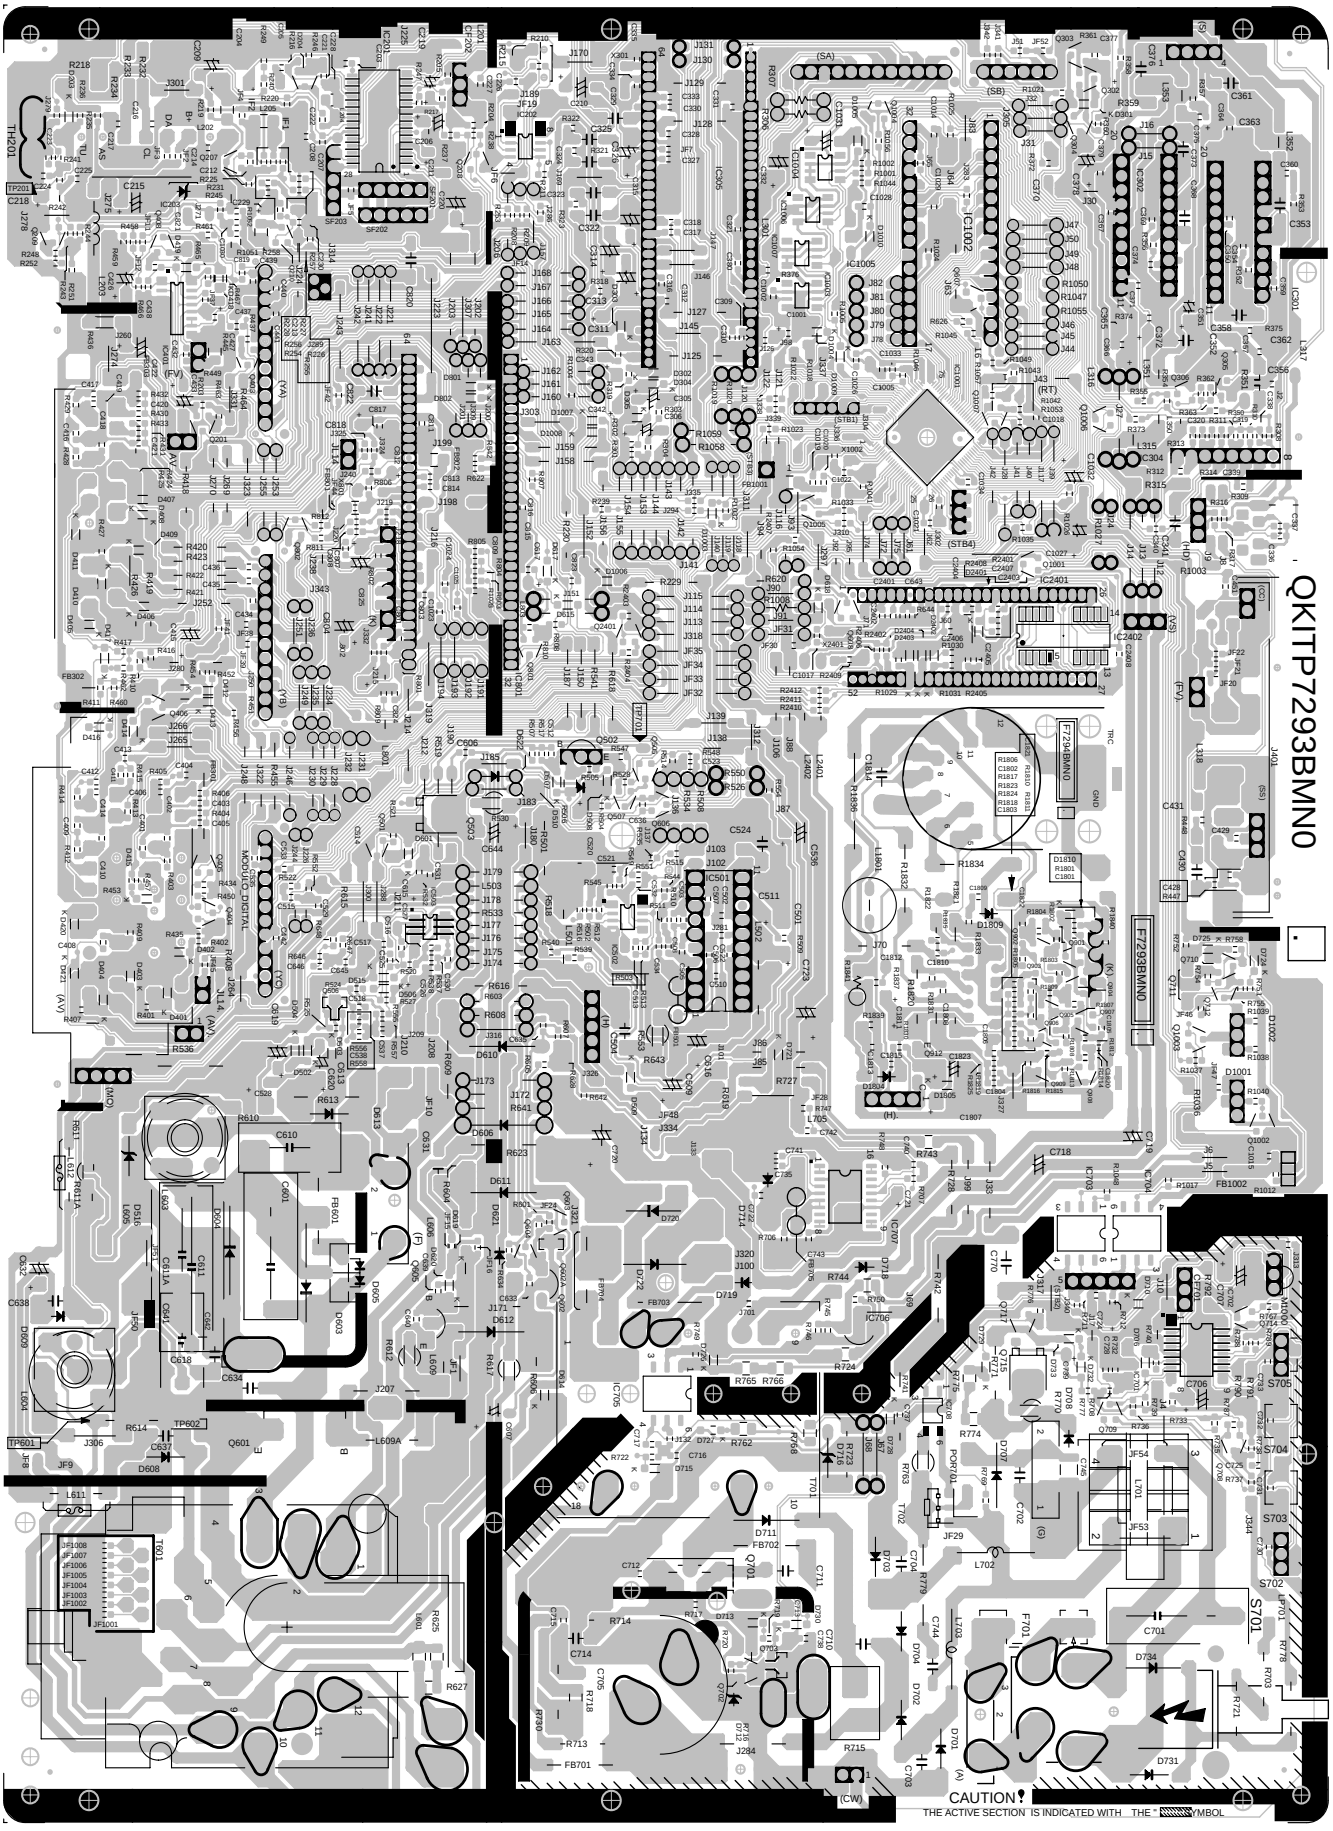

81FW-57E DINAMIC FOCUS UNIT PRINTED WIRING BOARDS.

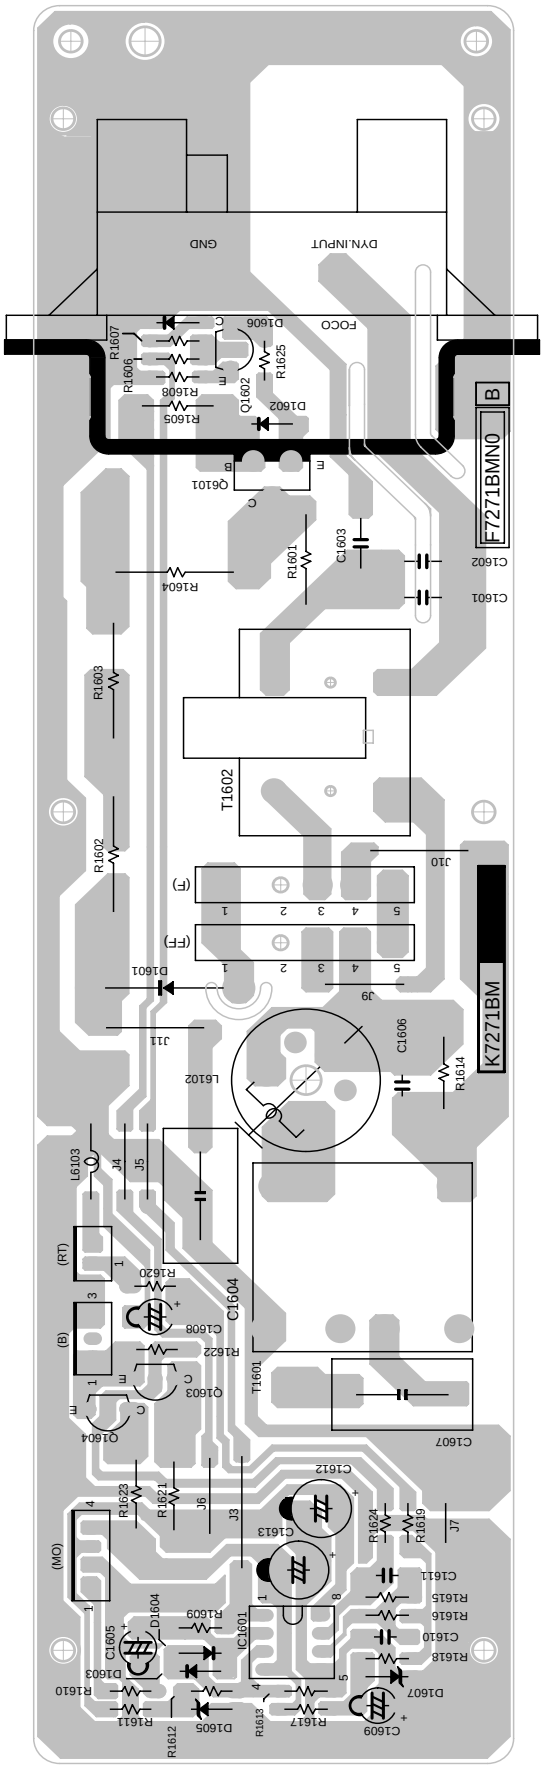

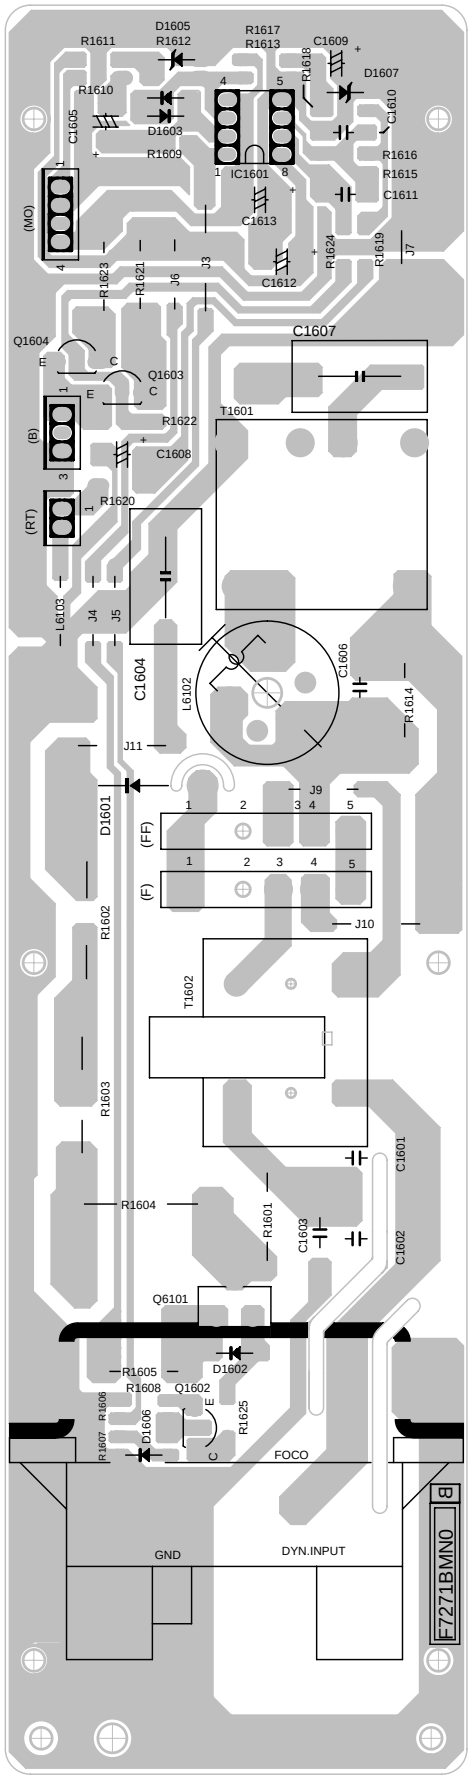

POWER SWITCH UNIT PRINTED WIRING BOARDS.

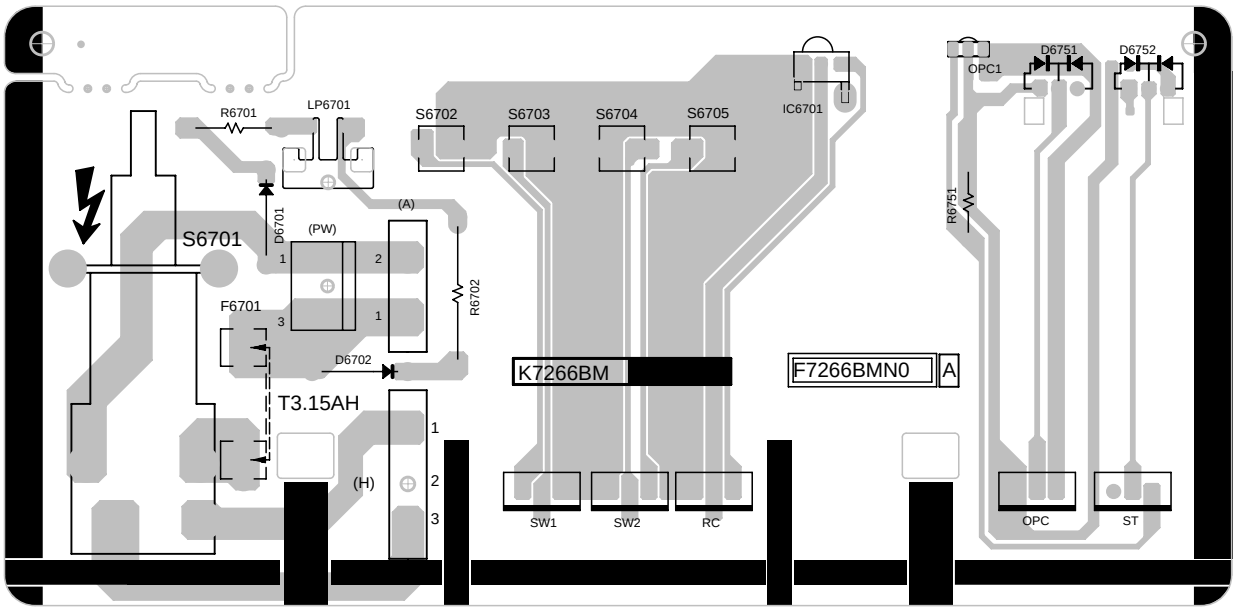

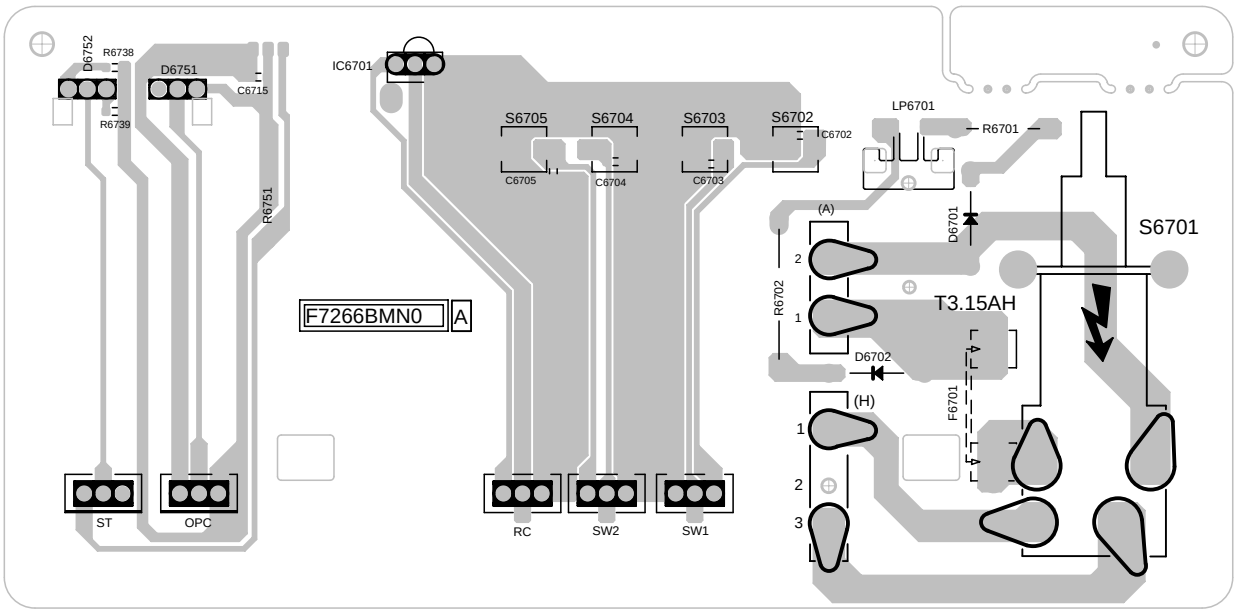

CRT MODULE UNIT PRINTED WIRING BOARD. Component side.

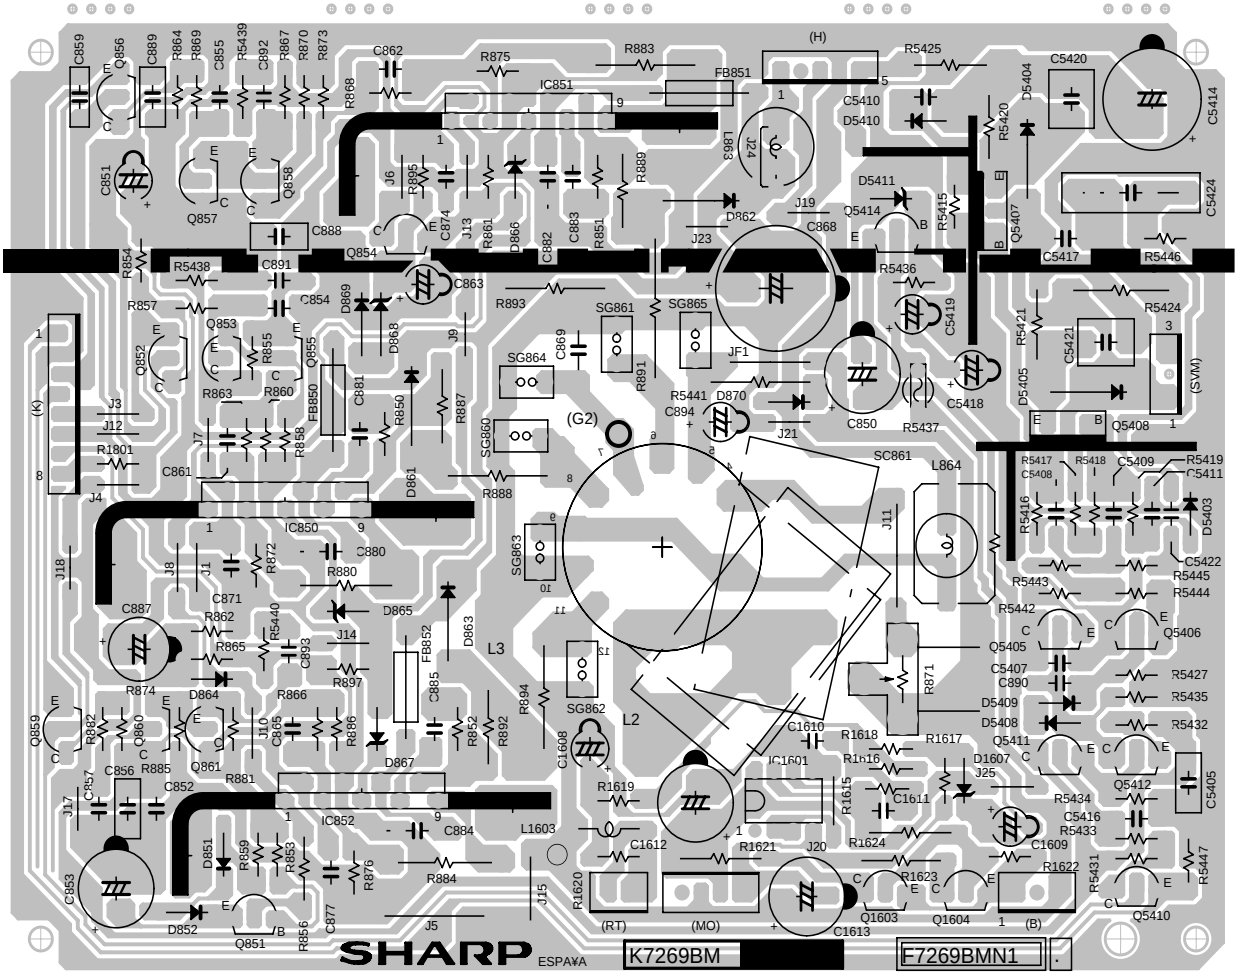

FRONT A/V UNIT PRINTED WIRING BOARD. Component side.

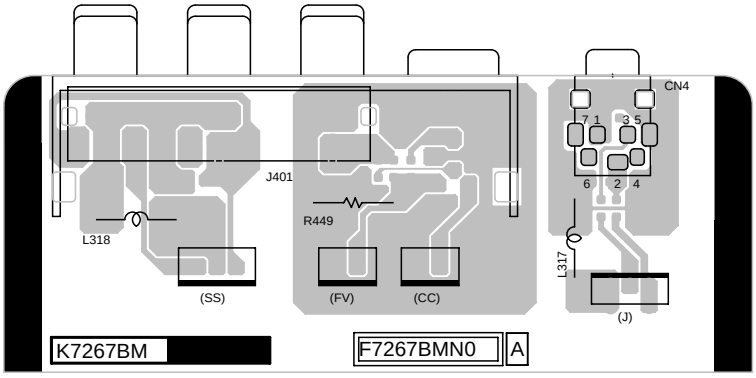

CRT MODULE UNIT PRINTED WIRING BOARD. Copper side.

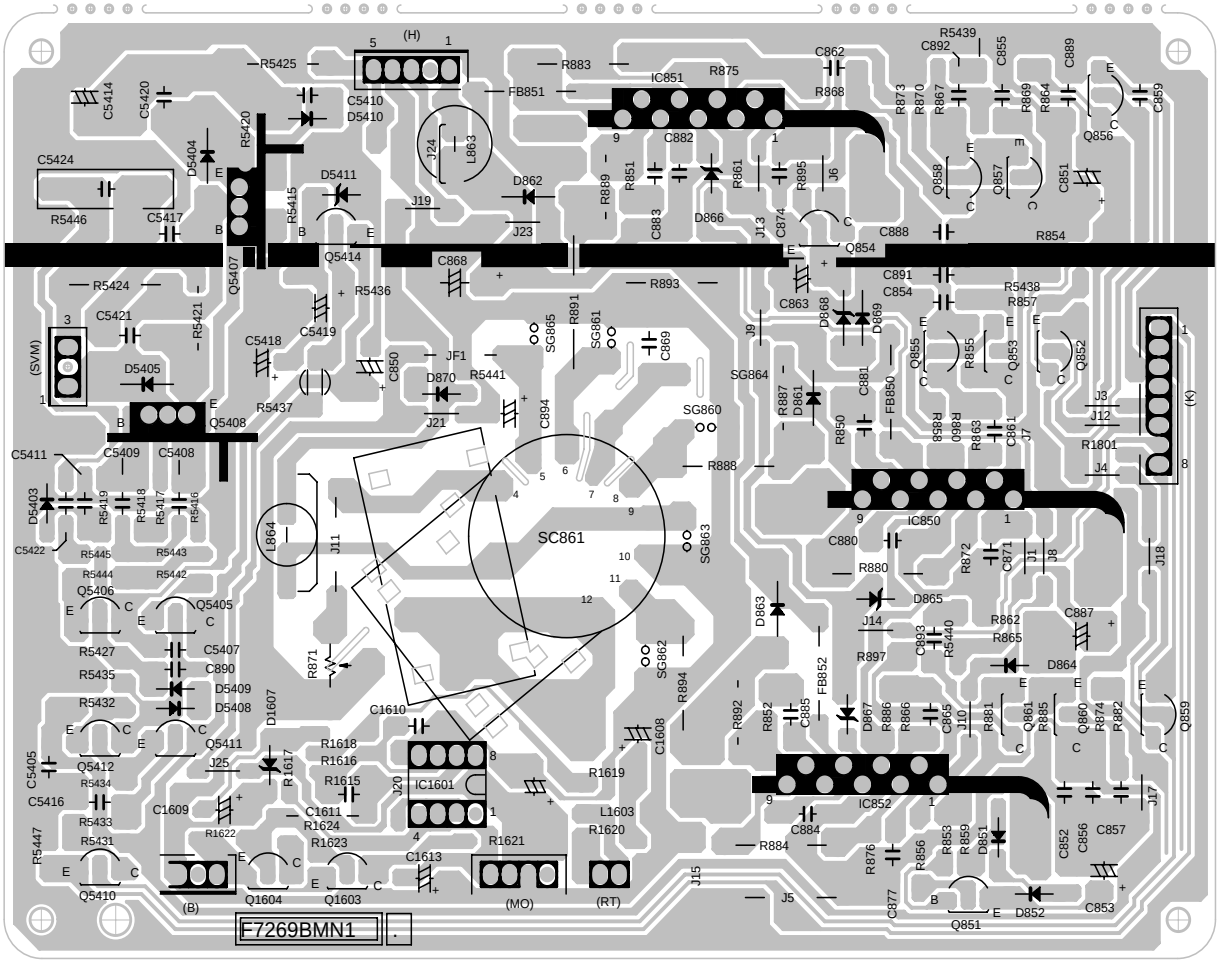

FRONT A/V UNIT PRINTED WIRING BOARD. Copper side.

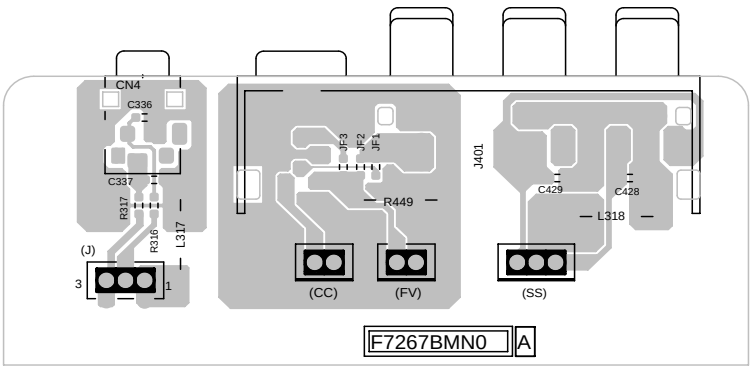

OPTION 1: 7270 DIGITAL MODULE UNIT PRINTED WIRING BOARDS.

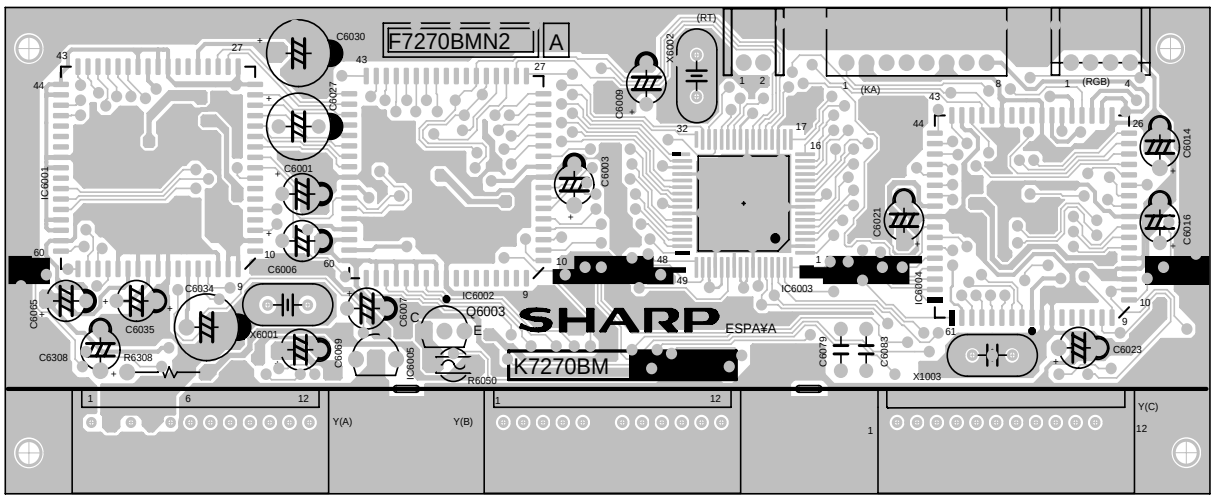

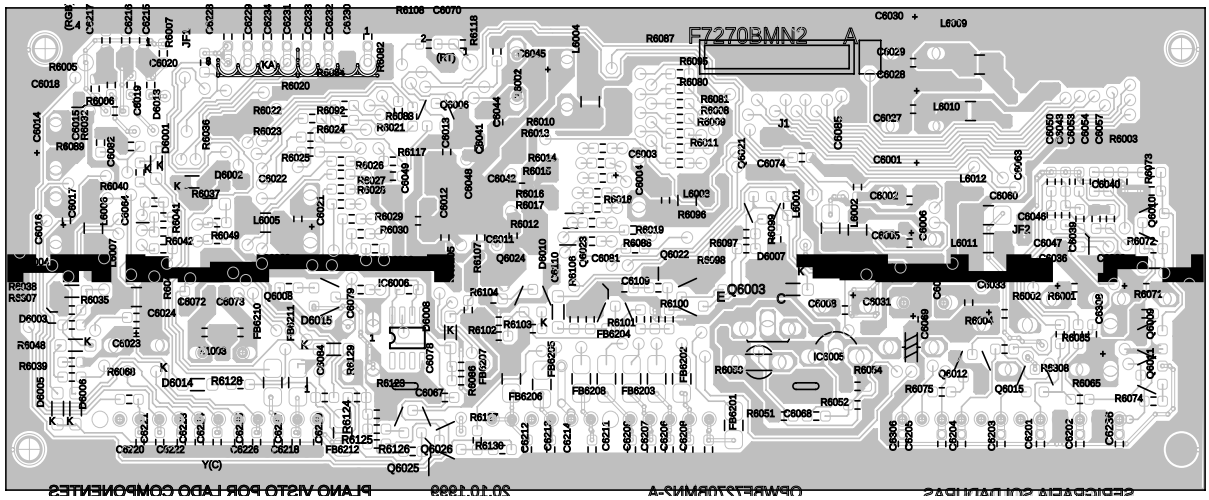

CENTRAL SPEAKER UNIT PRINTED WIRING BOARDS.

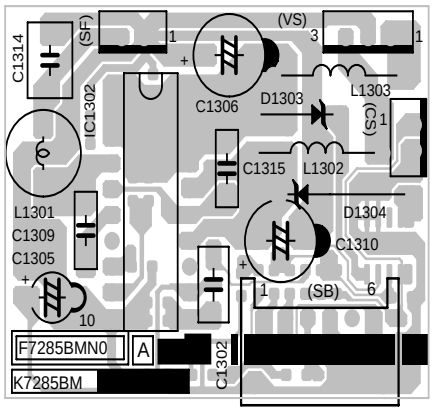

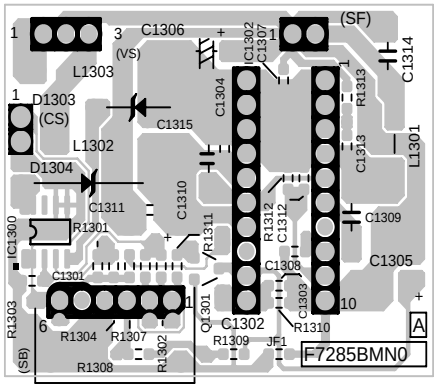

OPTION 2: 7295 DIGITAL MODULE UNIT PRINTED WIRING BOARDS.

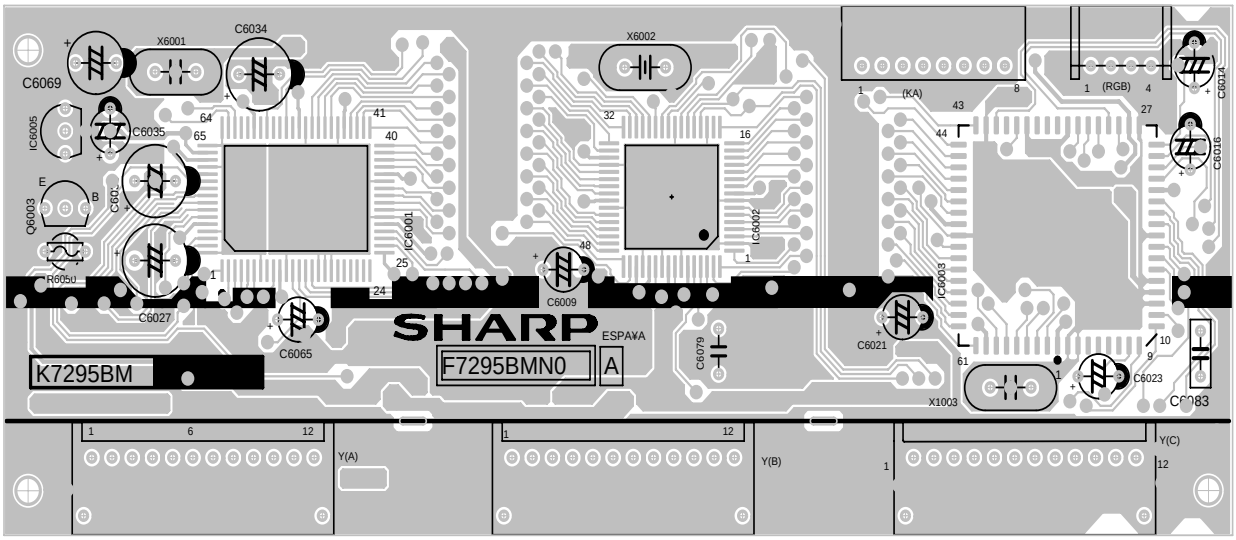

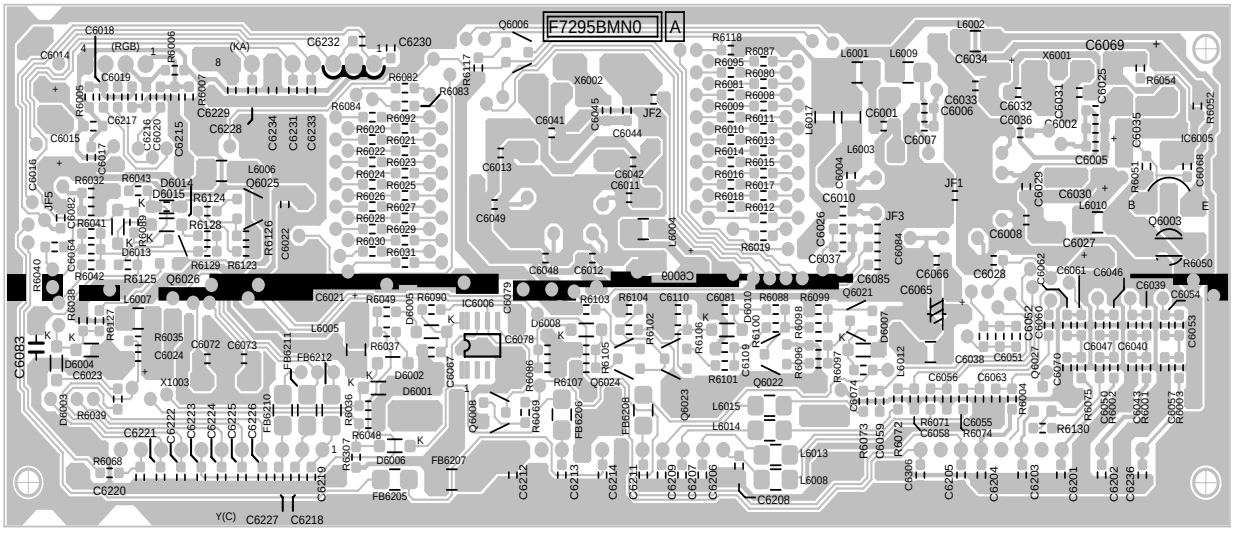

DESCRIPTION OF SCHEMATIC DIAGRAM

SAFETY NOTE:

1. DISCONNECT THE AC PLUG FROM THE AC OUTLET BEFORE REPLACING PARTS.

2. SEMICONDUCTOR HEAT SINKS SHOULD BE REGARDED AS POTENTIAL SHOCK HAZARDS WHEN THE CHASSIS IS OPERATING.

IMPOTANT SAFETY NOTE:

PARTS MARKED WITH « » ( ) ARE IMPORTANT FOR MAINTAINING THE SAFETY OF THE SET. BE SURE TO REPLACE THESE PARTS WITH SPECIFIED ONES FOR MAINTAINING THE SAFETY AND PERFORMANCE OF THE SET.

SERVICE PRECAUTION:

THE AREA ENCLOSED BY THIS LINE (–•–•–) IS DIRECTLY CONNECTED WITH AC MAINS VOLTAGE.
WHEN SERVICING THE AREA, CONNECT AN ISOLATING TRANSFORMER BETWEEN TV RECEIVER AND AC LINE TO ELIMINATE HAZARD OF ELECTRIC SHOCK.

NOTE:

1. The unit of resistance «ohm»is omitted (K=1000 ohms. M= Megaohm).
2. All resistors are 1/8 watt. unless otherwise noted.
3. All capacitors areμF, unless otherwise noted (P= μμF).
4. The capacitor with Part No. RC-FZ9XXXBMNJ is designed to with stand 63V.

CAUTION
This circuit diagram is original one, therefore there may be light difference from yours.

WAVEFORM MEASUREMENT CONDITION:
Colour bar genetator signal of 70 dB from RF input.

① 

580V

② 

1.3 KV 31.25 KHz

③ 

4 Vp-p 31.25 KHz

④ 

350 Vp-p 100Hz

⑤ 

41 Vp-p 31.25 KHz

⑥ 
1.8 Vp-p 100Hz

⑦ 
3.3V 100Hz

⑧ 
45 Vp-p 113 KHz FM

⑨ 
19V 100Hz

⑩ 

25 Vp-p 100Hz

⑪ 
1.15 Vp-p 31.25KHz

⑫ 
400Hz

⑬ 
400Hz

Page 18

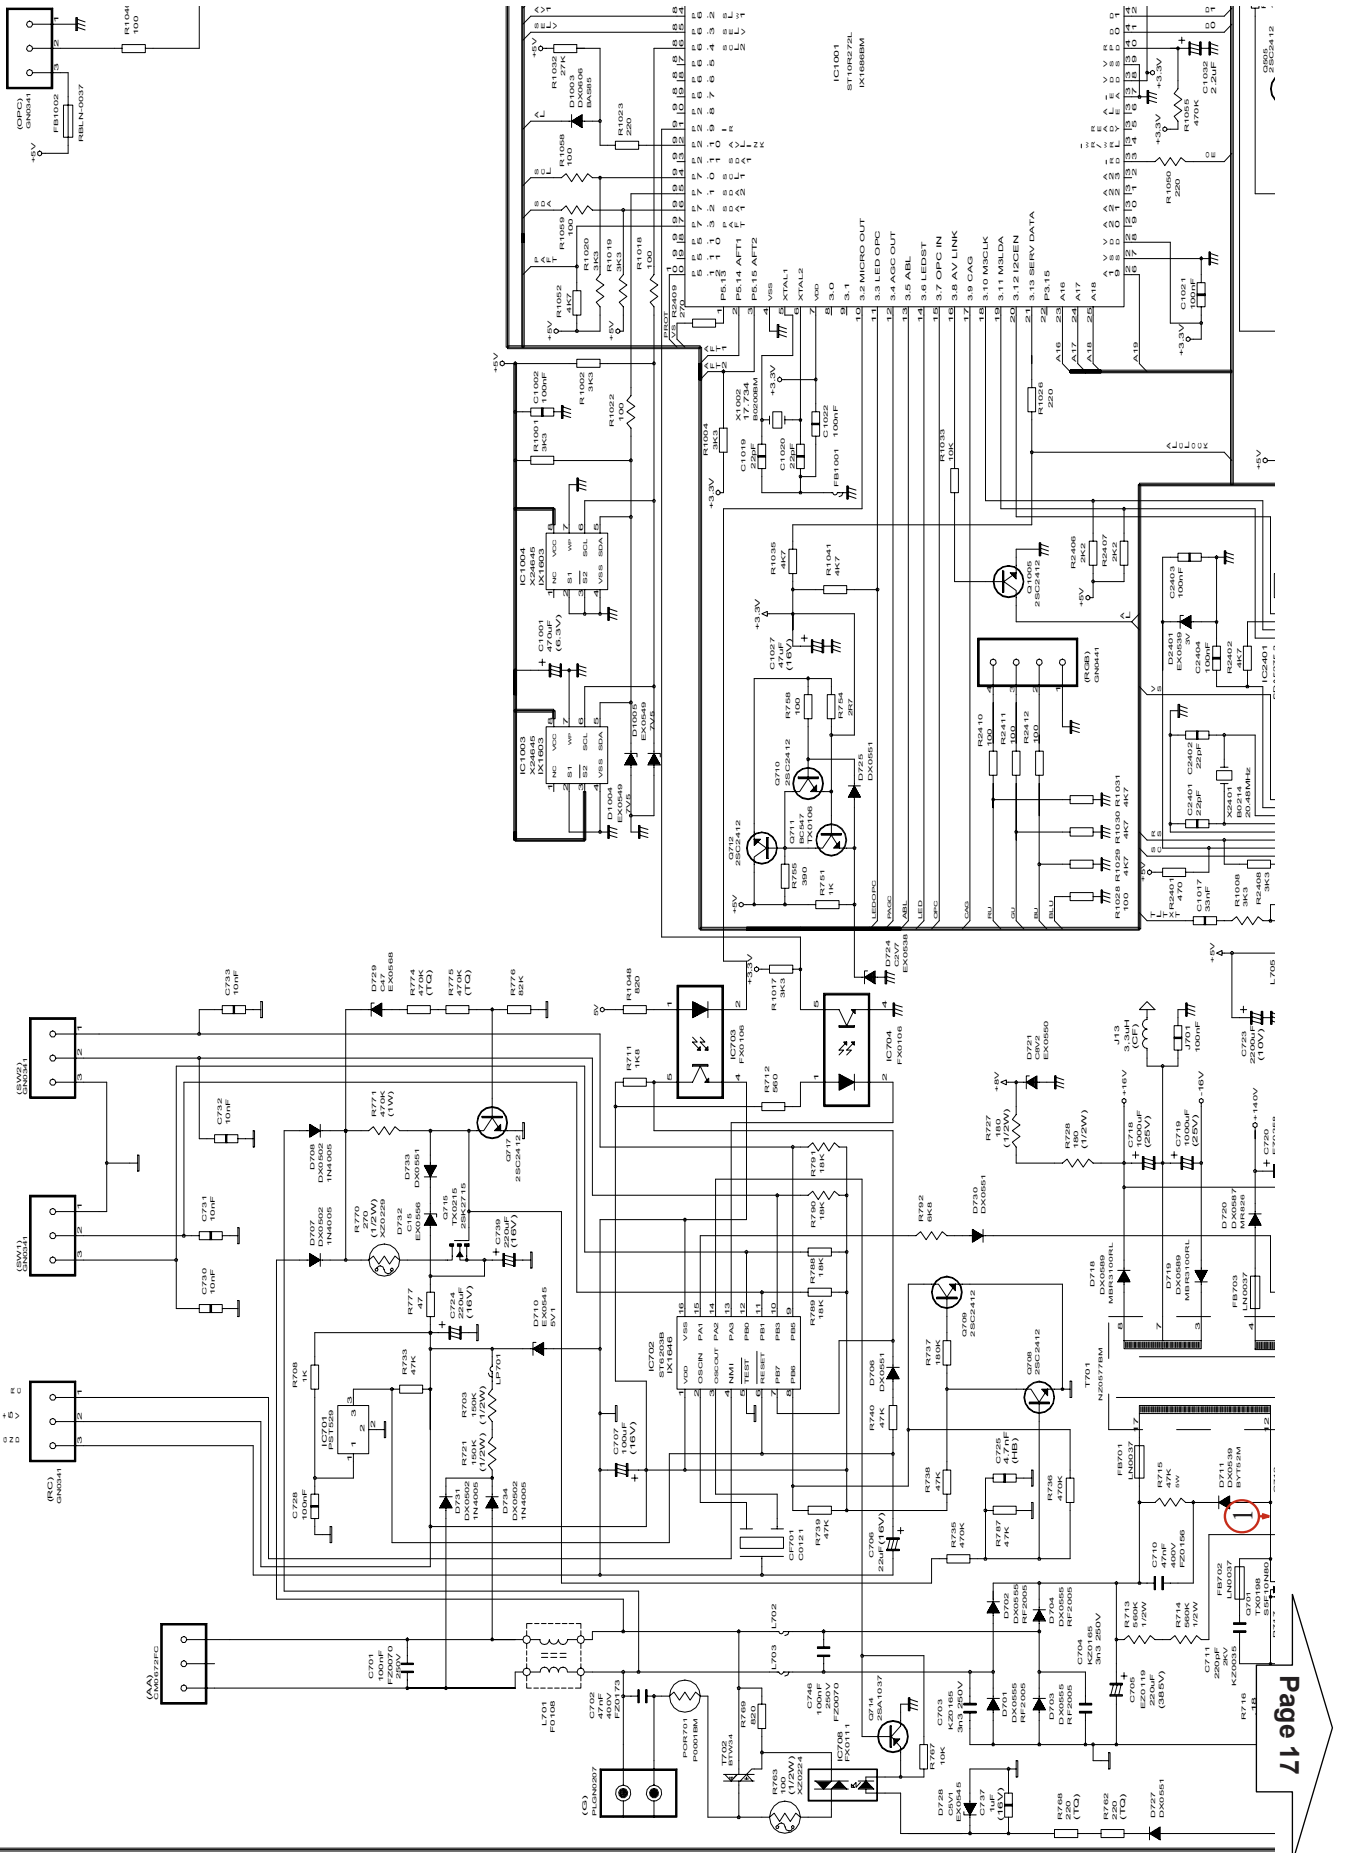

81FW-57E SCHEMATIC DIAGRAM.

Page 17

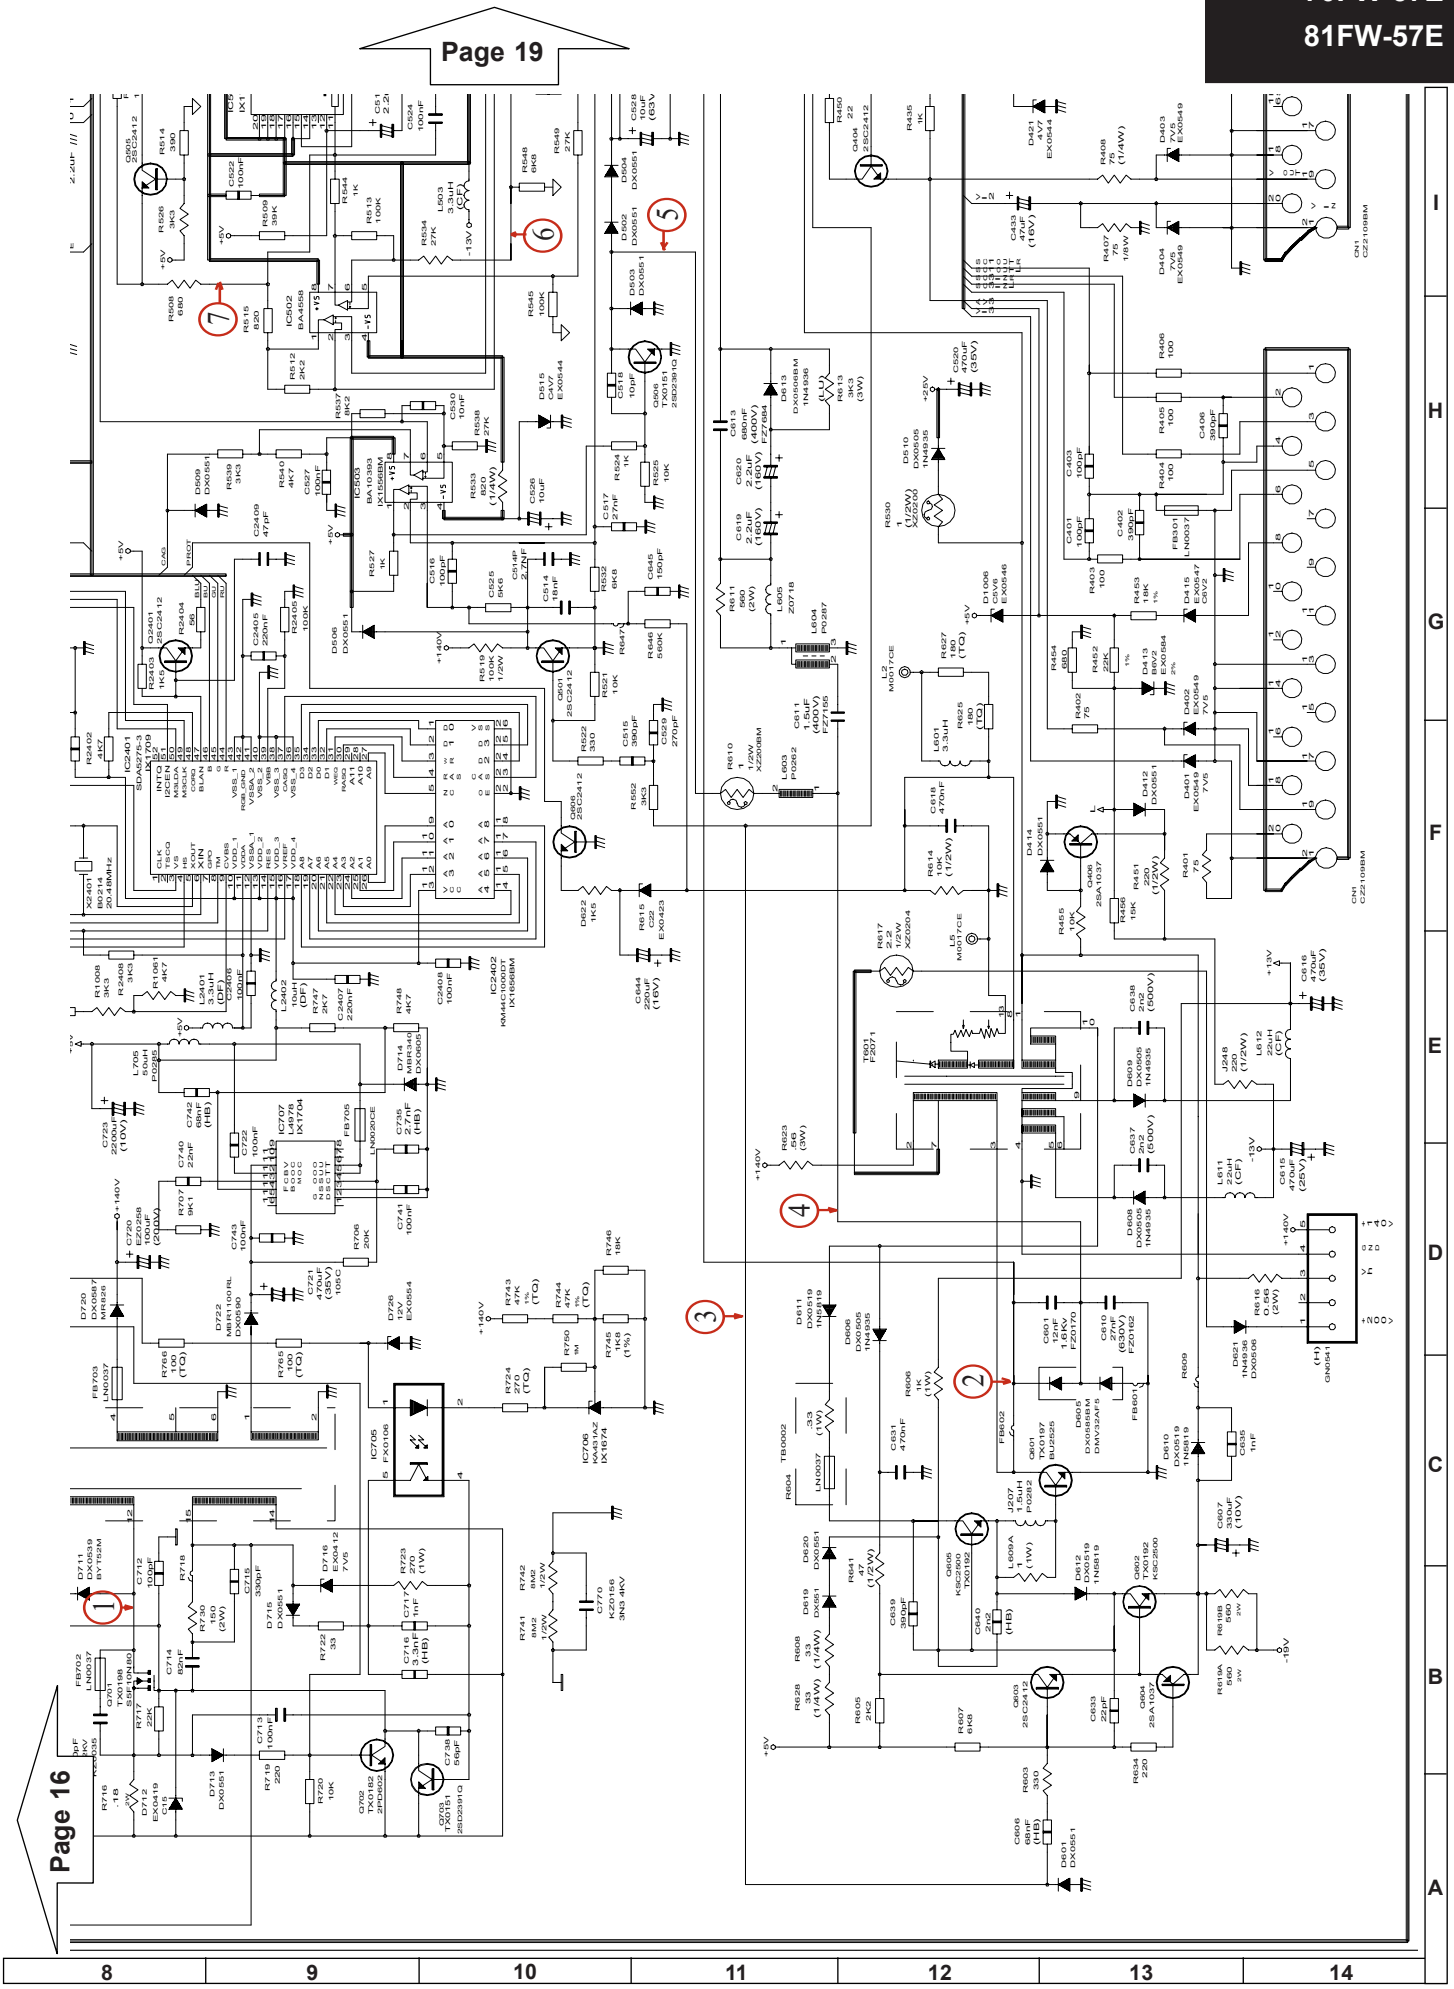
Page 19
Page 16
1
2
3
4
5
6
7
8
9
10
11
12
13
14
A
B
C
D
E
F
G
H
I

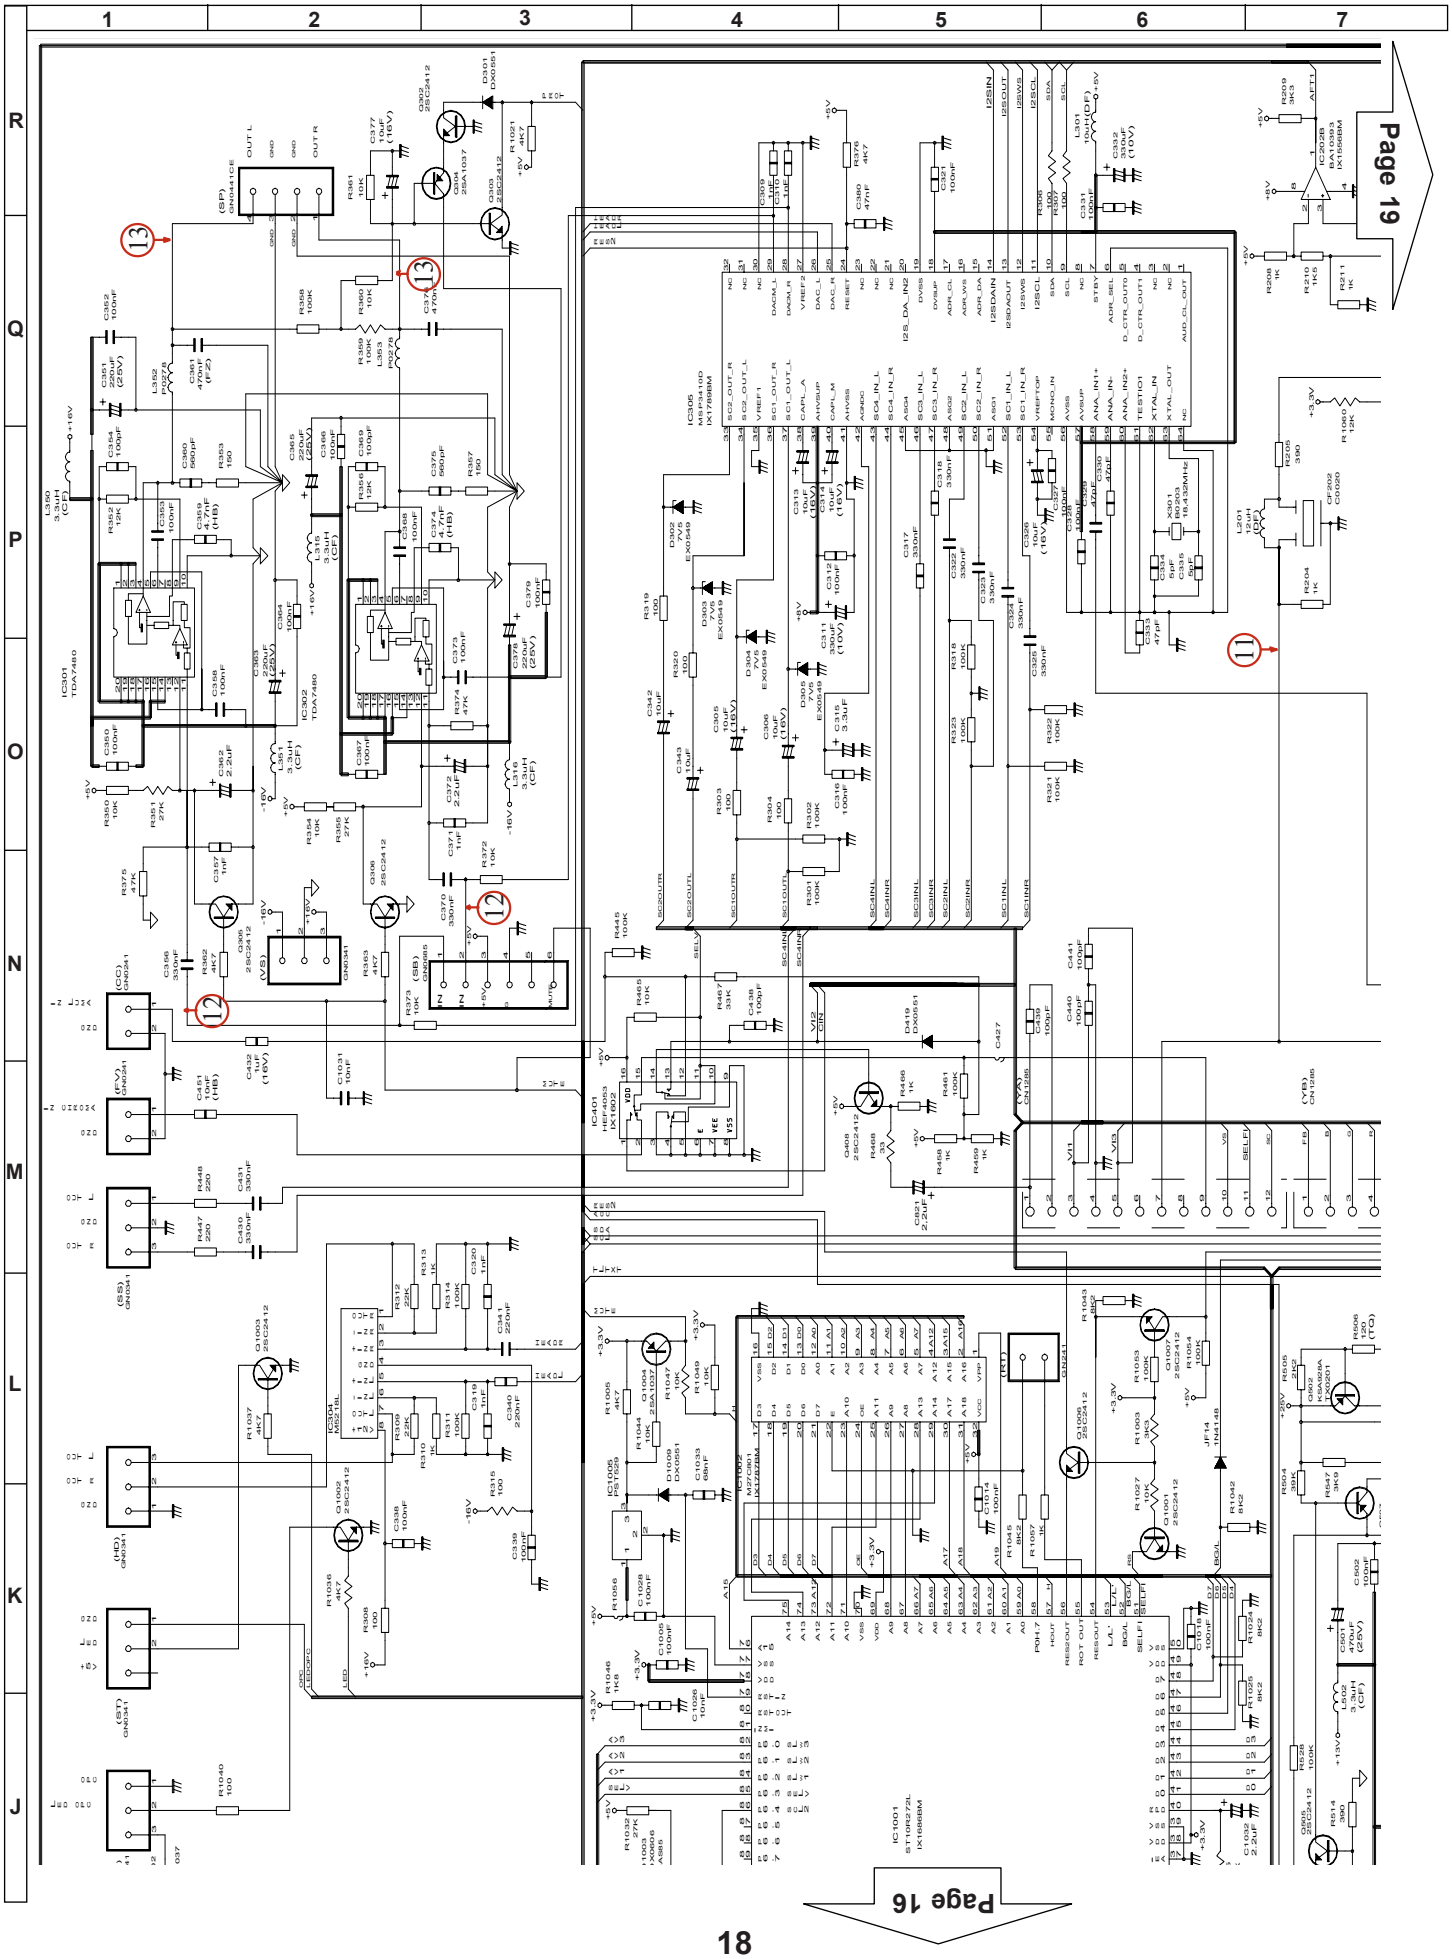
Page 19
Page 16

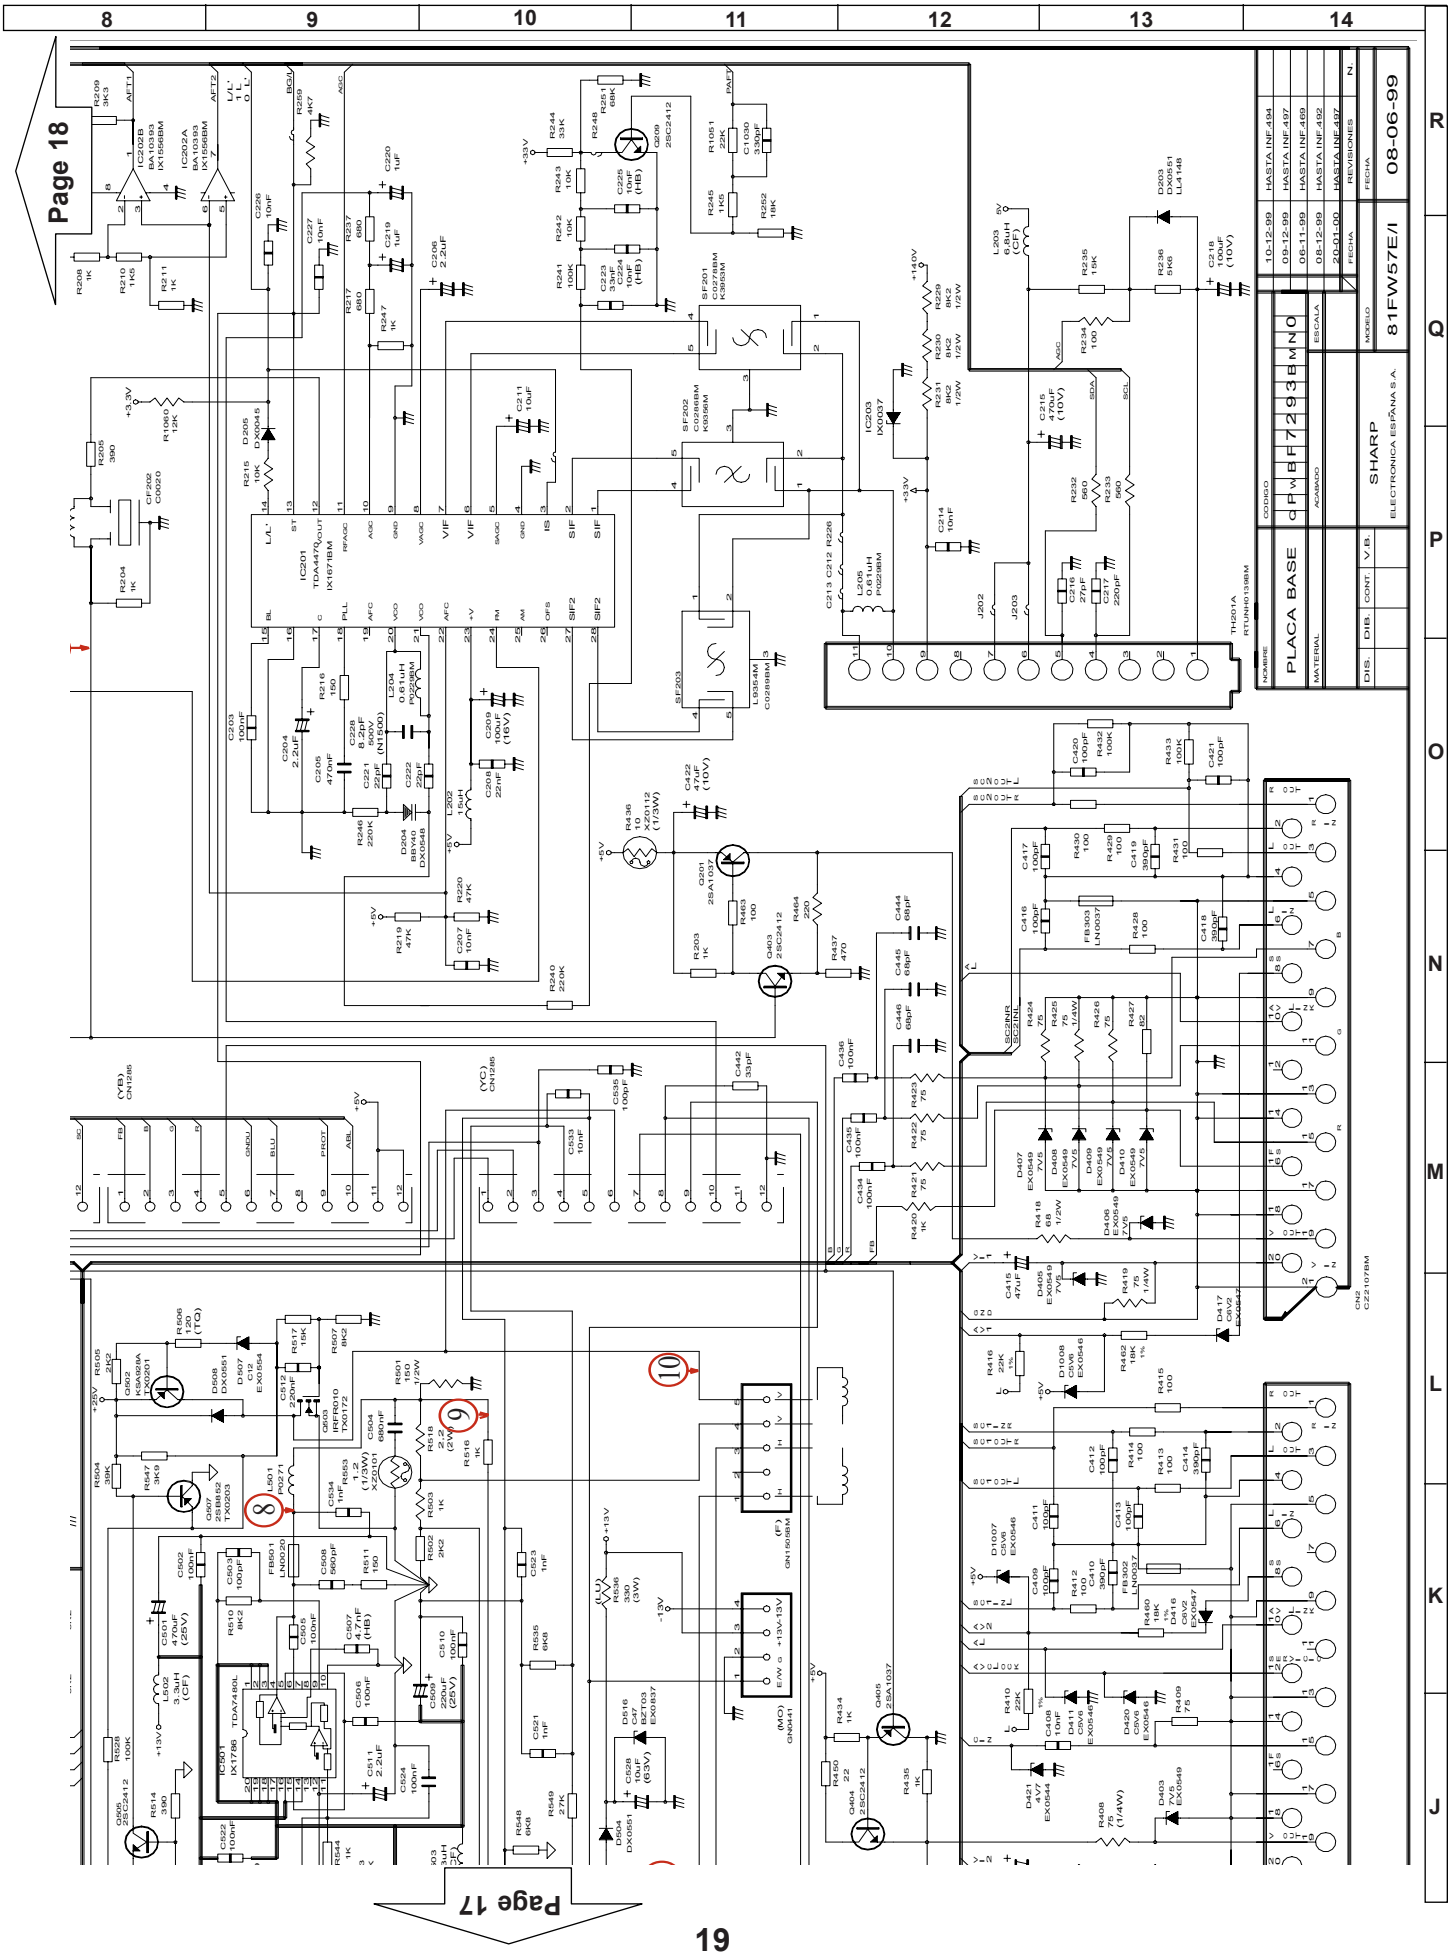
8
9
10
11
12
13
14
R
Q
P
O
N
M
L
K
J
Page 18
Page 17
PLACA BASE
SHARP
ELECTRONICA ESPAÑA S.A.
81FW57E/I
08-06-99
CODIGO
MATERIAL
ESCALA
MODELO
FECHA
REVISIONES
10-12-99 HASTA INF 494
09-12-99 HASTA INF 497
06-11-99 HASTA INF 469
08-12-99 HASTA INF 492
20-01-00 HASTA INF 497

70FW-57E SCHEMATIC DIAGRAM.

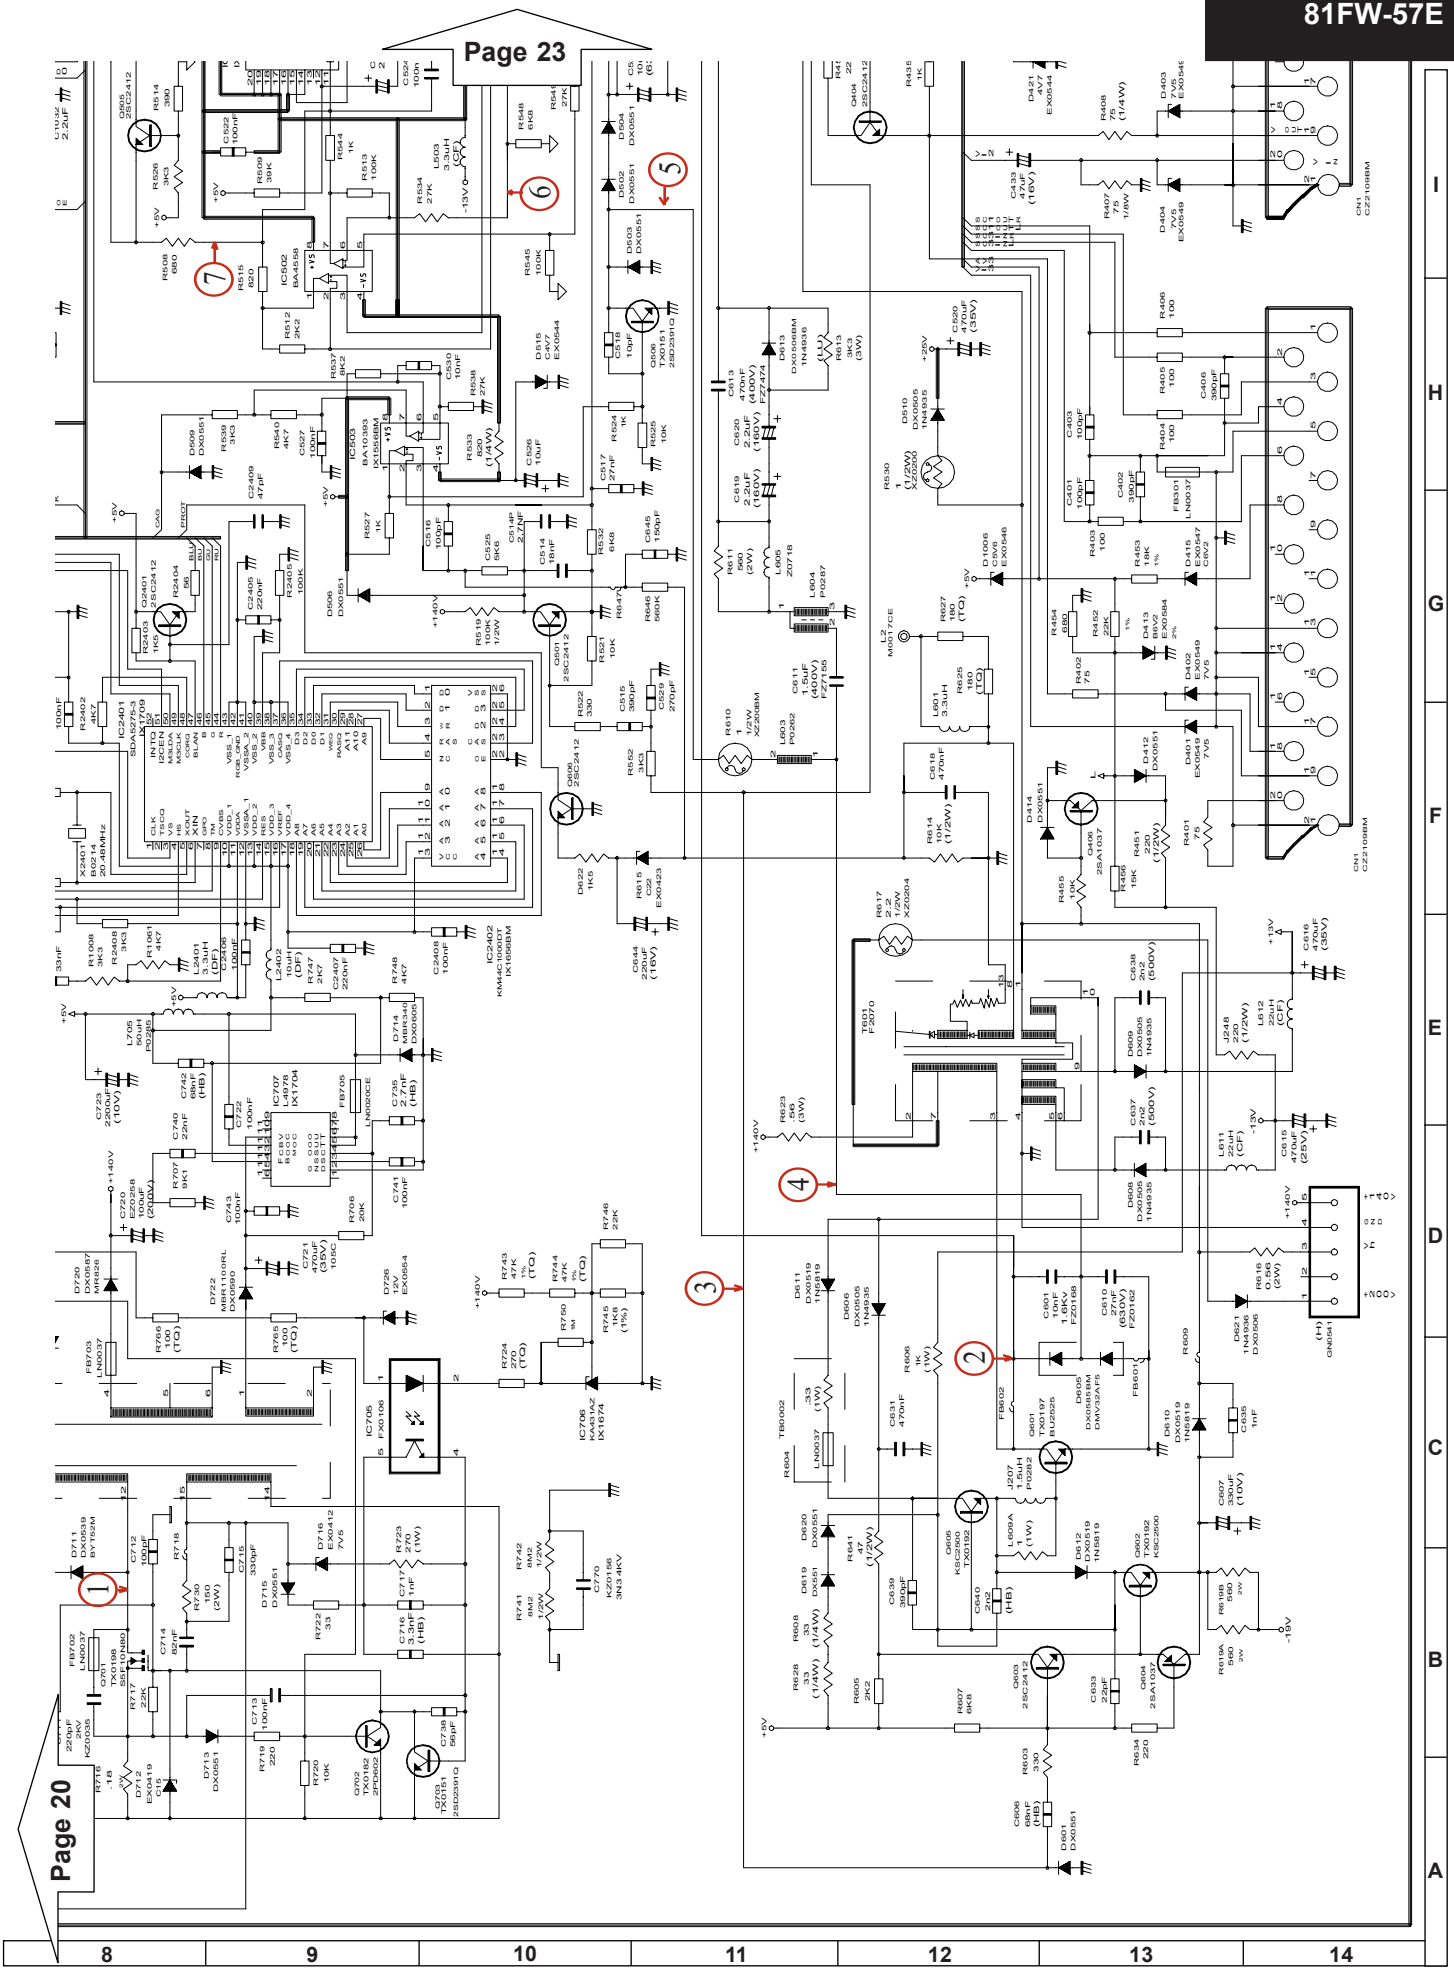
Page 23
Page 20
1
2
3
4
5
6
7
8
9
10
11
12
13
14
A
B
C
D
E
F
G
H
I

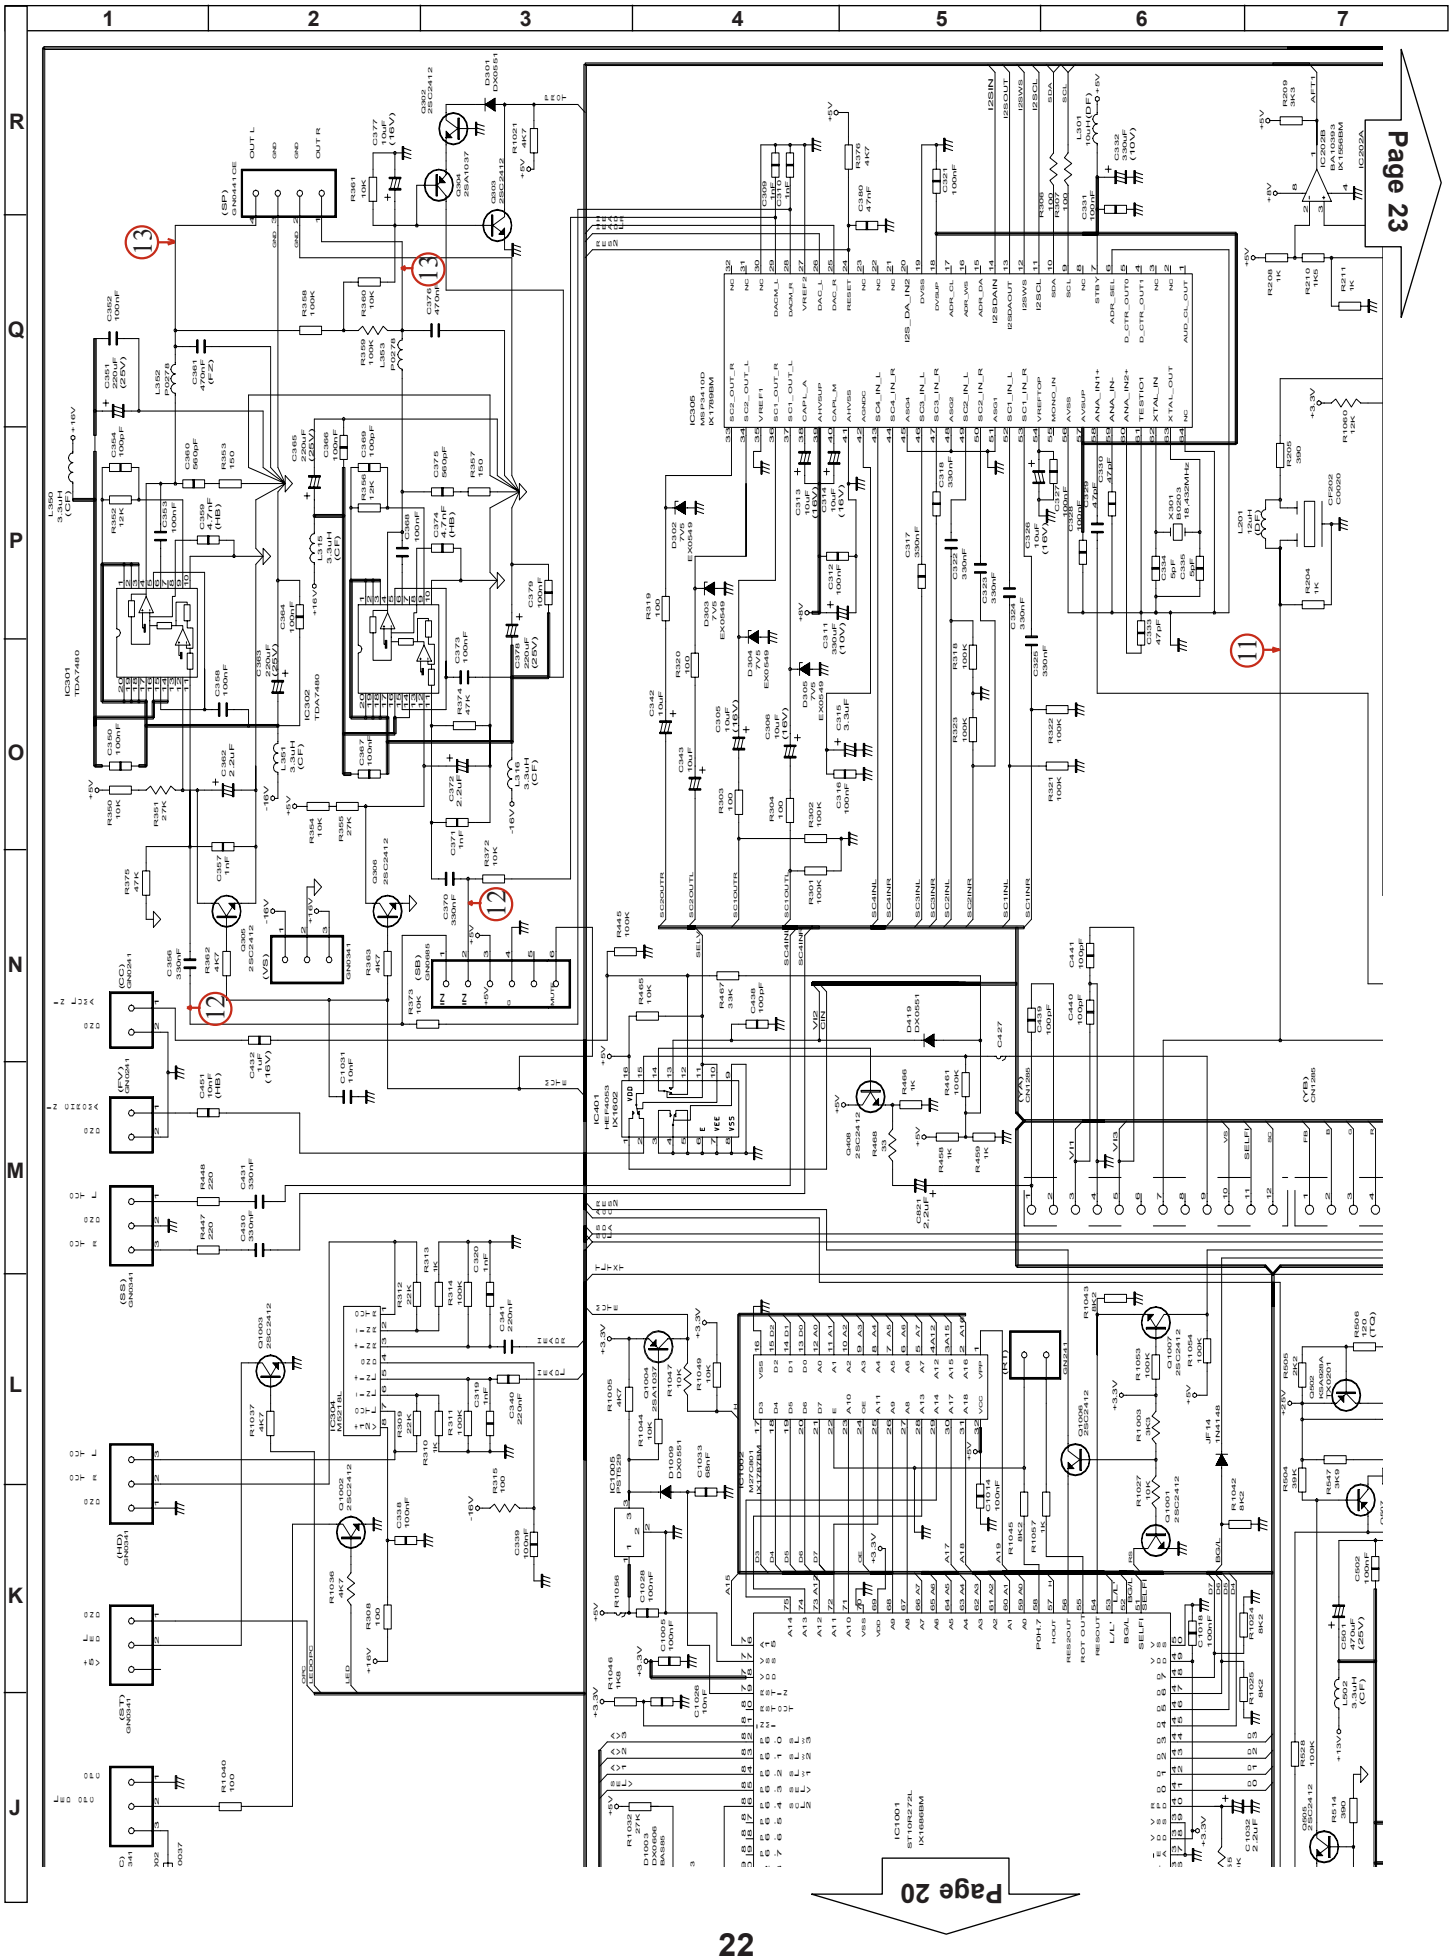
Page 23
Page 20

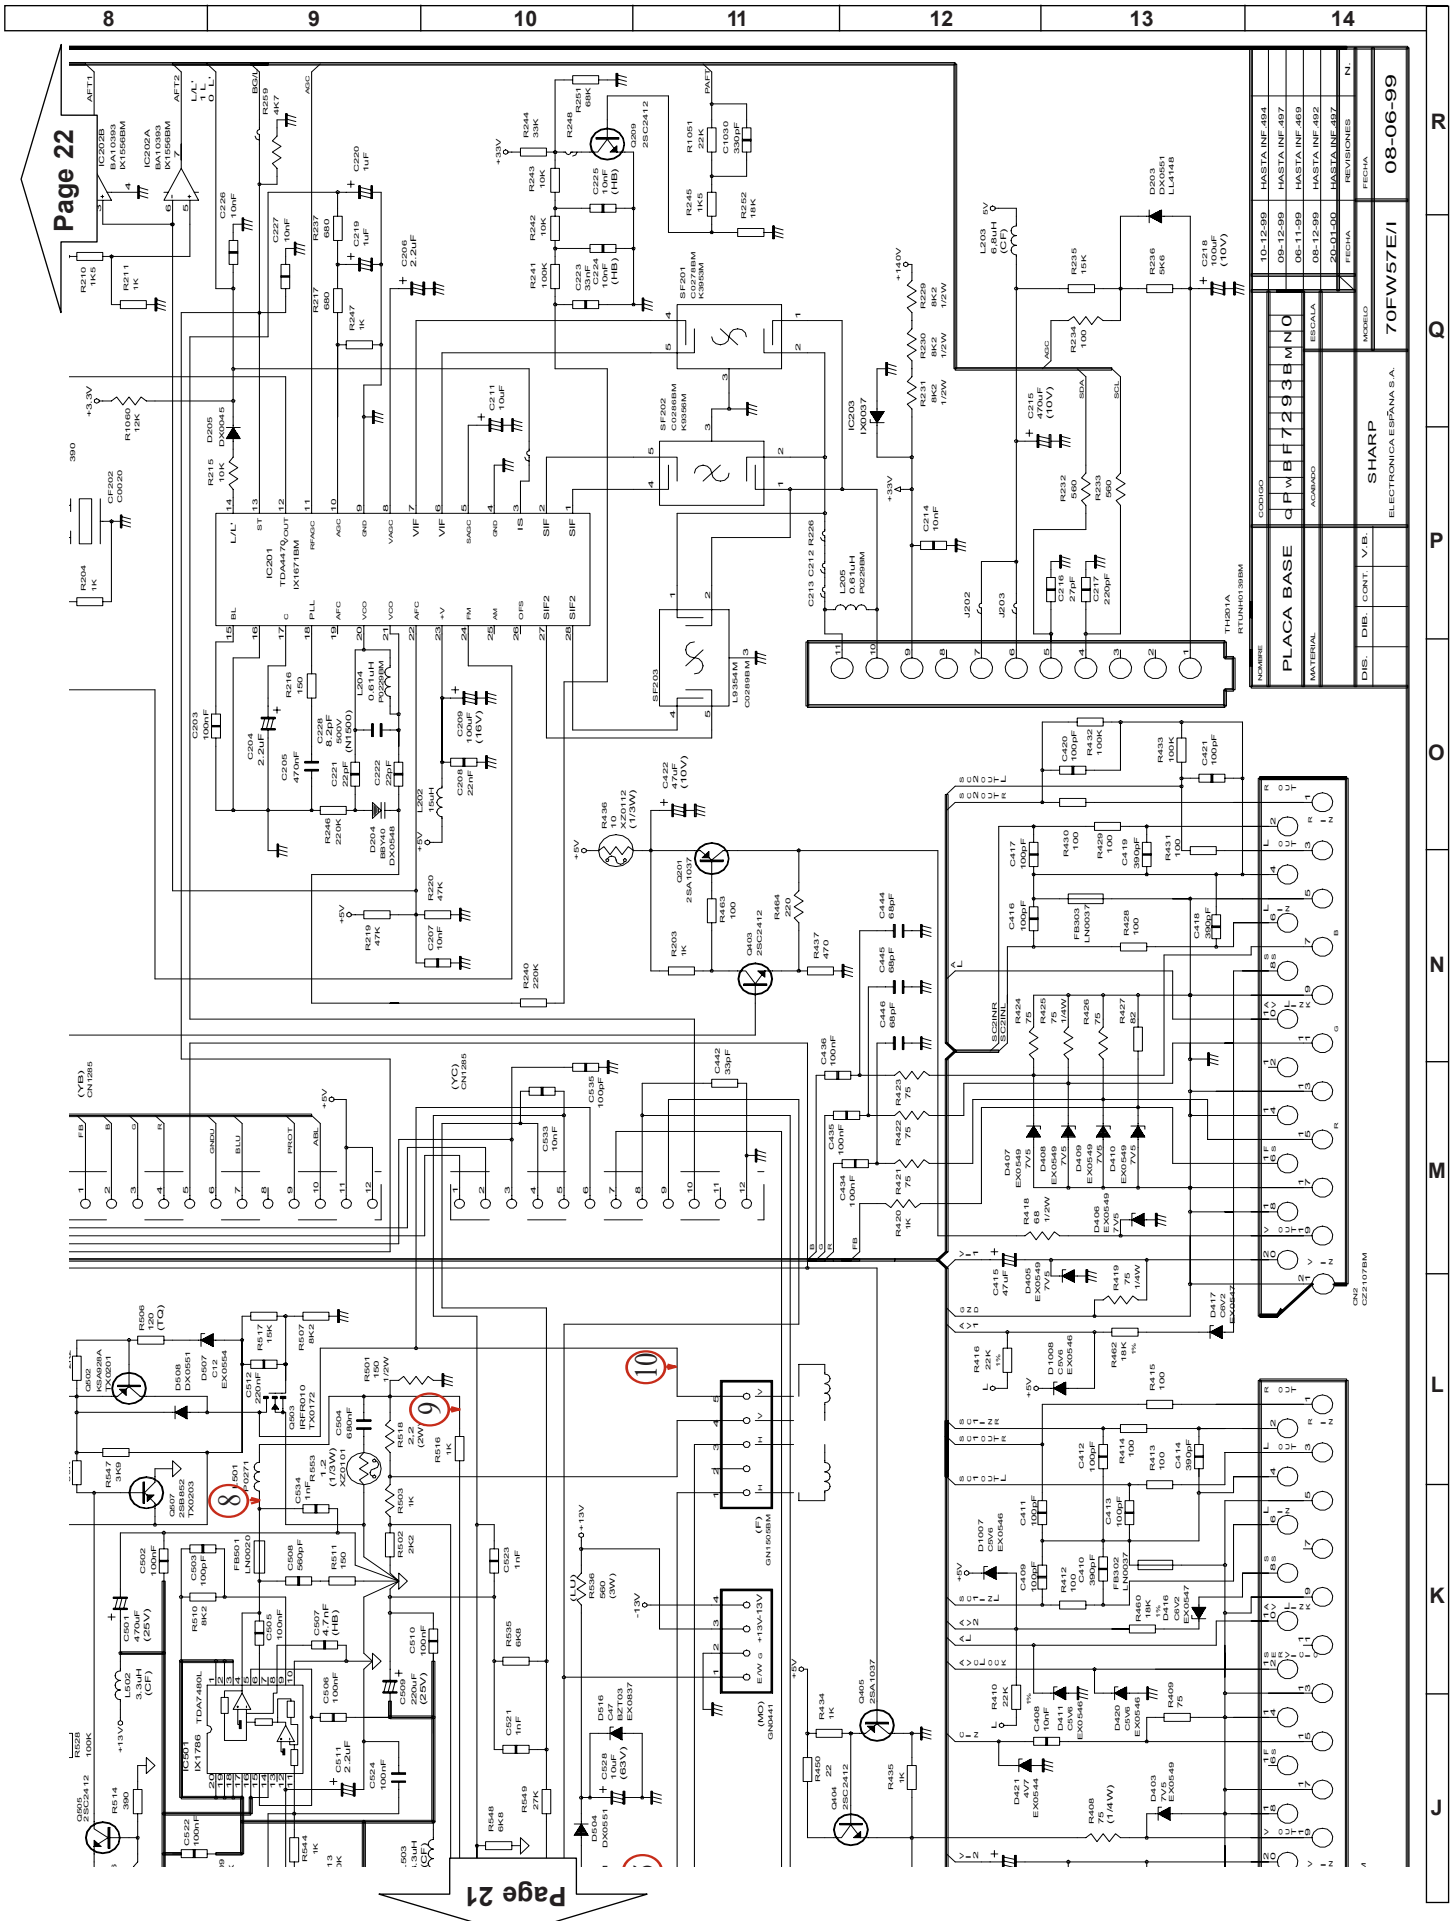
Page 22
Page 21
PLACA BASE
SHARP
ELECTRONICA ESPAÑA S.A.
70FW57E/I
08-06-99
CODIGO
MATERIAL
ESCALA
MODELO
FECHA
REVISIONES
DIS.
DIB.
CONT
V.B.
10-12-99 HASTA INF 494
09-12-99 HASTA INF 497
06-11-99 HASTA INF 469
08-12-99 HASTA INF 492
20-01-00 HASTA INF 497

7270 DIGITAL MODULE SCHEMATIC DIAGRAM.

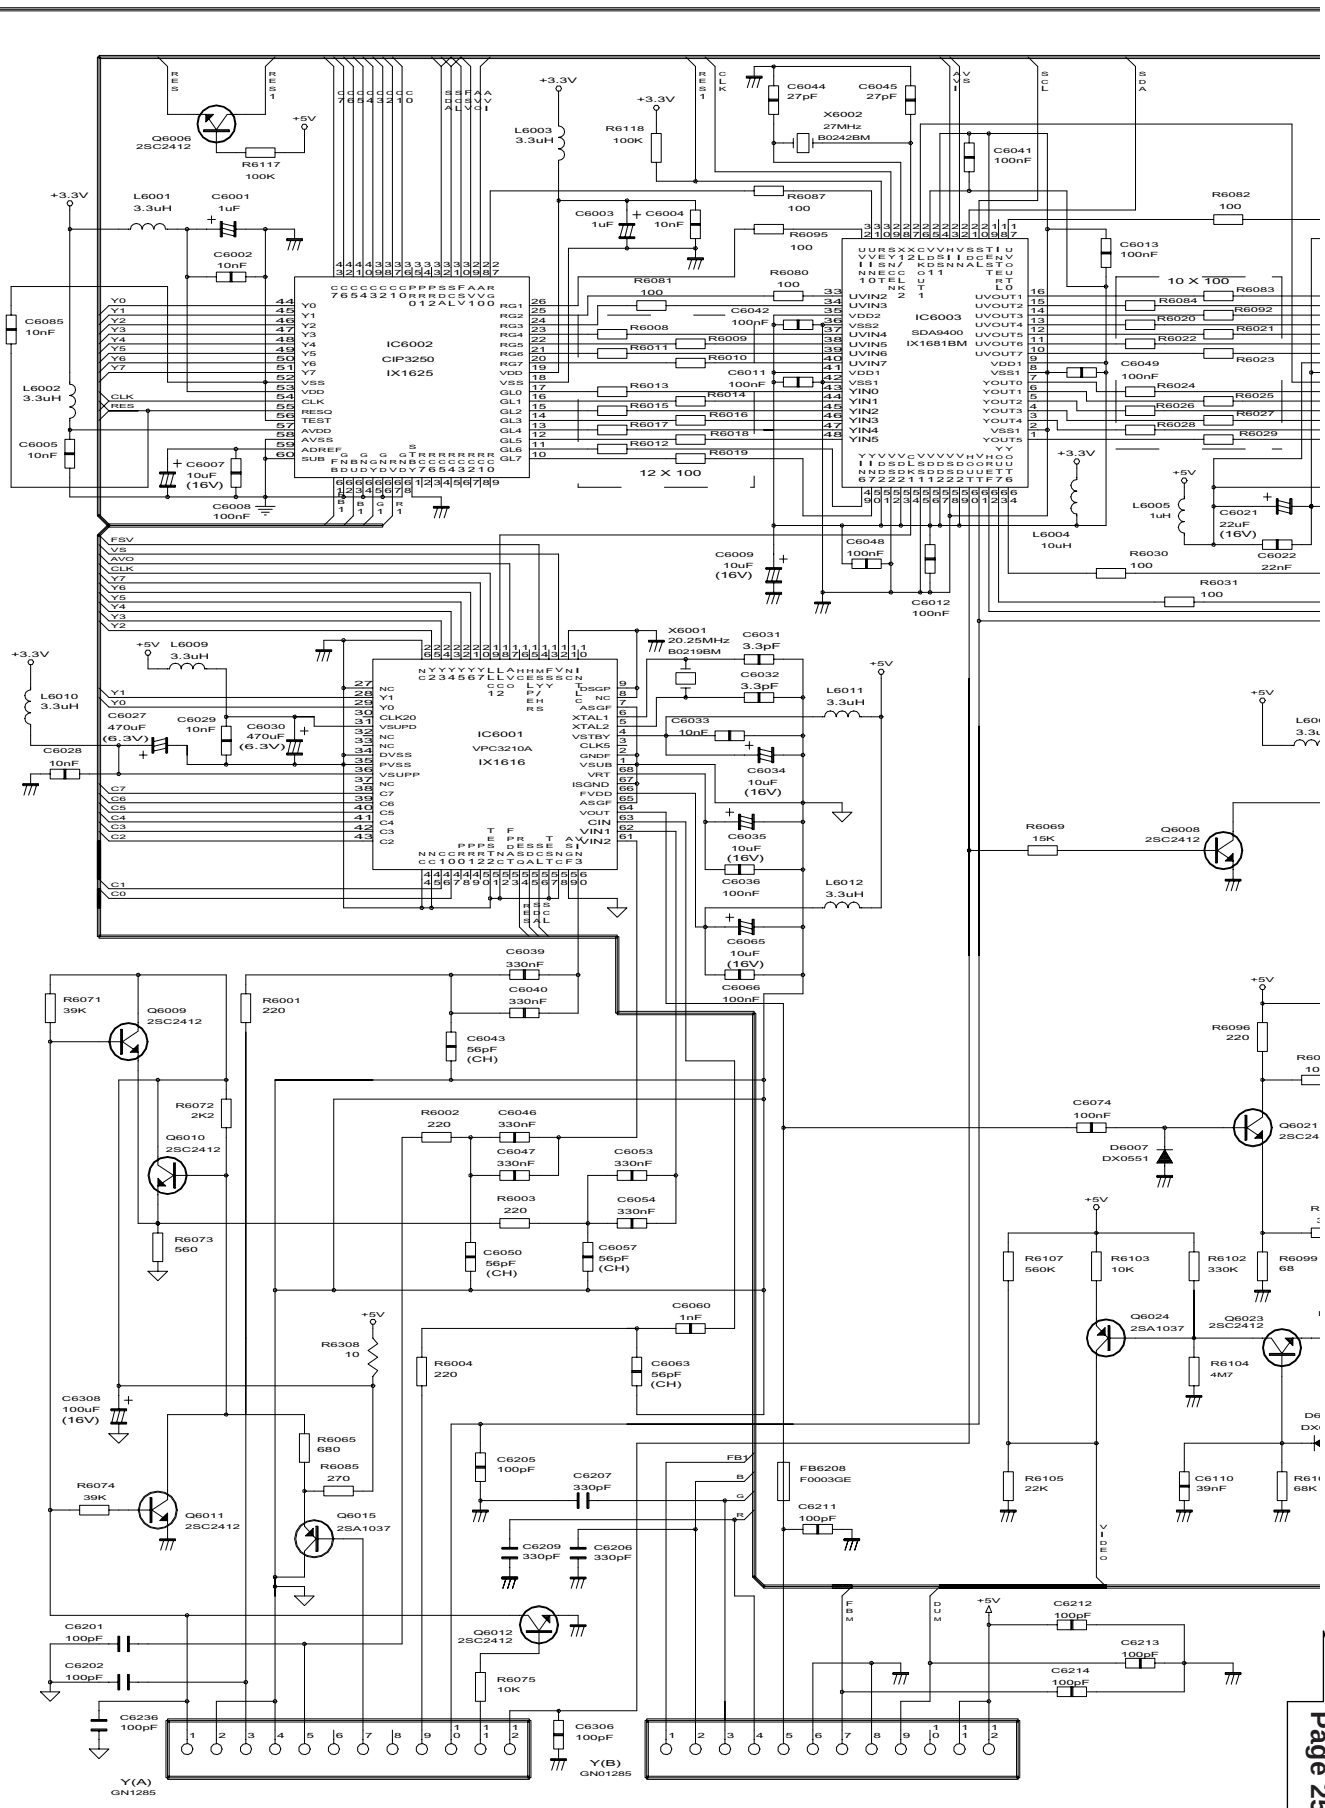

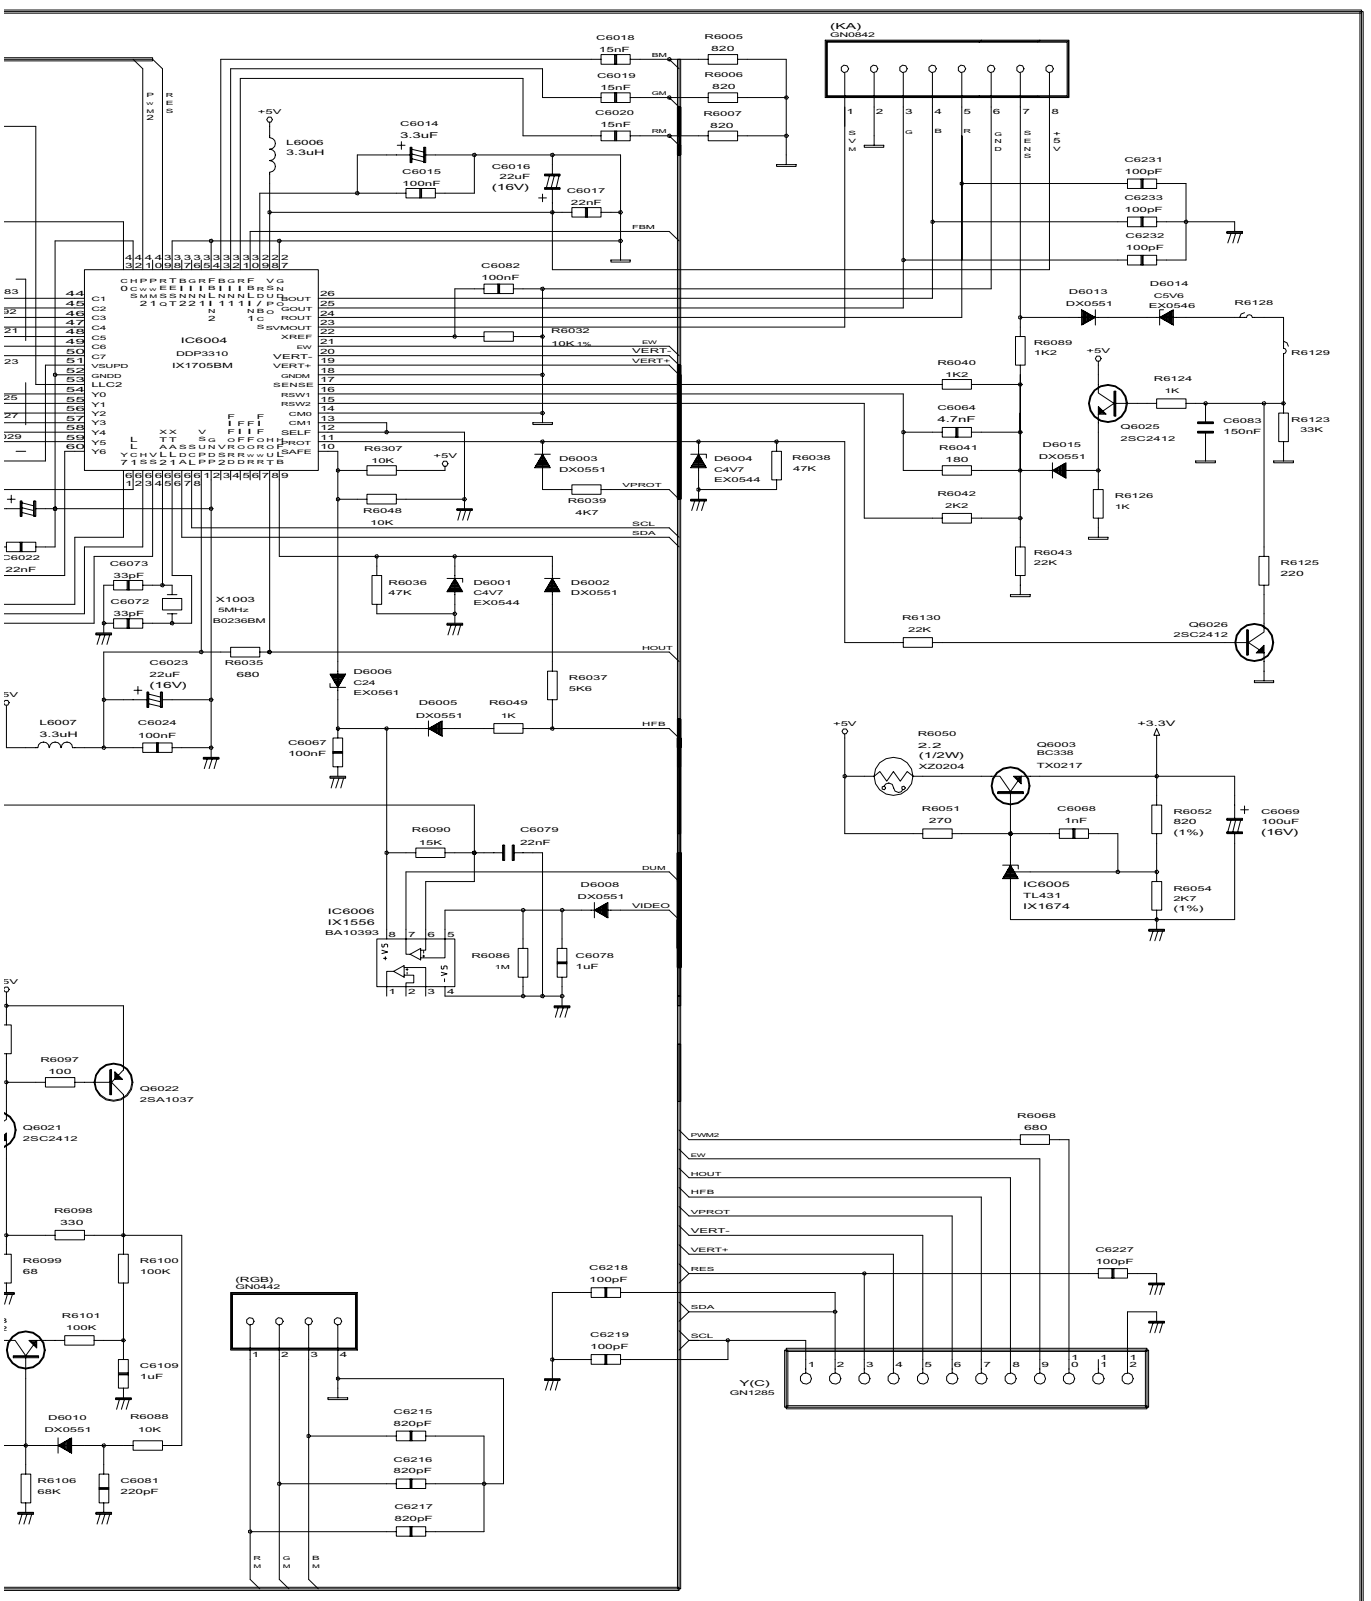

NOMBRE	CODIGO
MOD. DIGITAL	QKITP7270BMN2
MATERIAL	ACABADO

ESCALA
1:1

DIS.	DIB.	CONT.	V. B.

SHARP
ELECTRONICA ESPANA S.A.

MODELO	FECHA
81FW57E 70FW57E	23-06-99

	FECHA	REVISIONES	N
6	22-11-99	HASTA INF. 479	
5	06-11-99	HASTA INF. 457	
4	04-02-00	HASTA INF. 514	
3	21-01-00	HASTA INF. 497	
2	10-12-99	HASTA INF. 497	
1	09-12-99	HASTA INF. 494	

Page 24

7295 DIGITAL MODULE SCHEMATIC DIAGRAM.

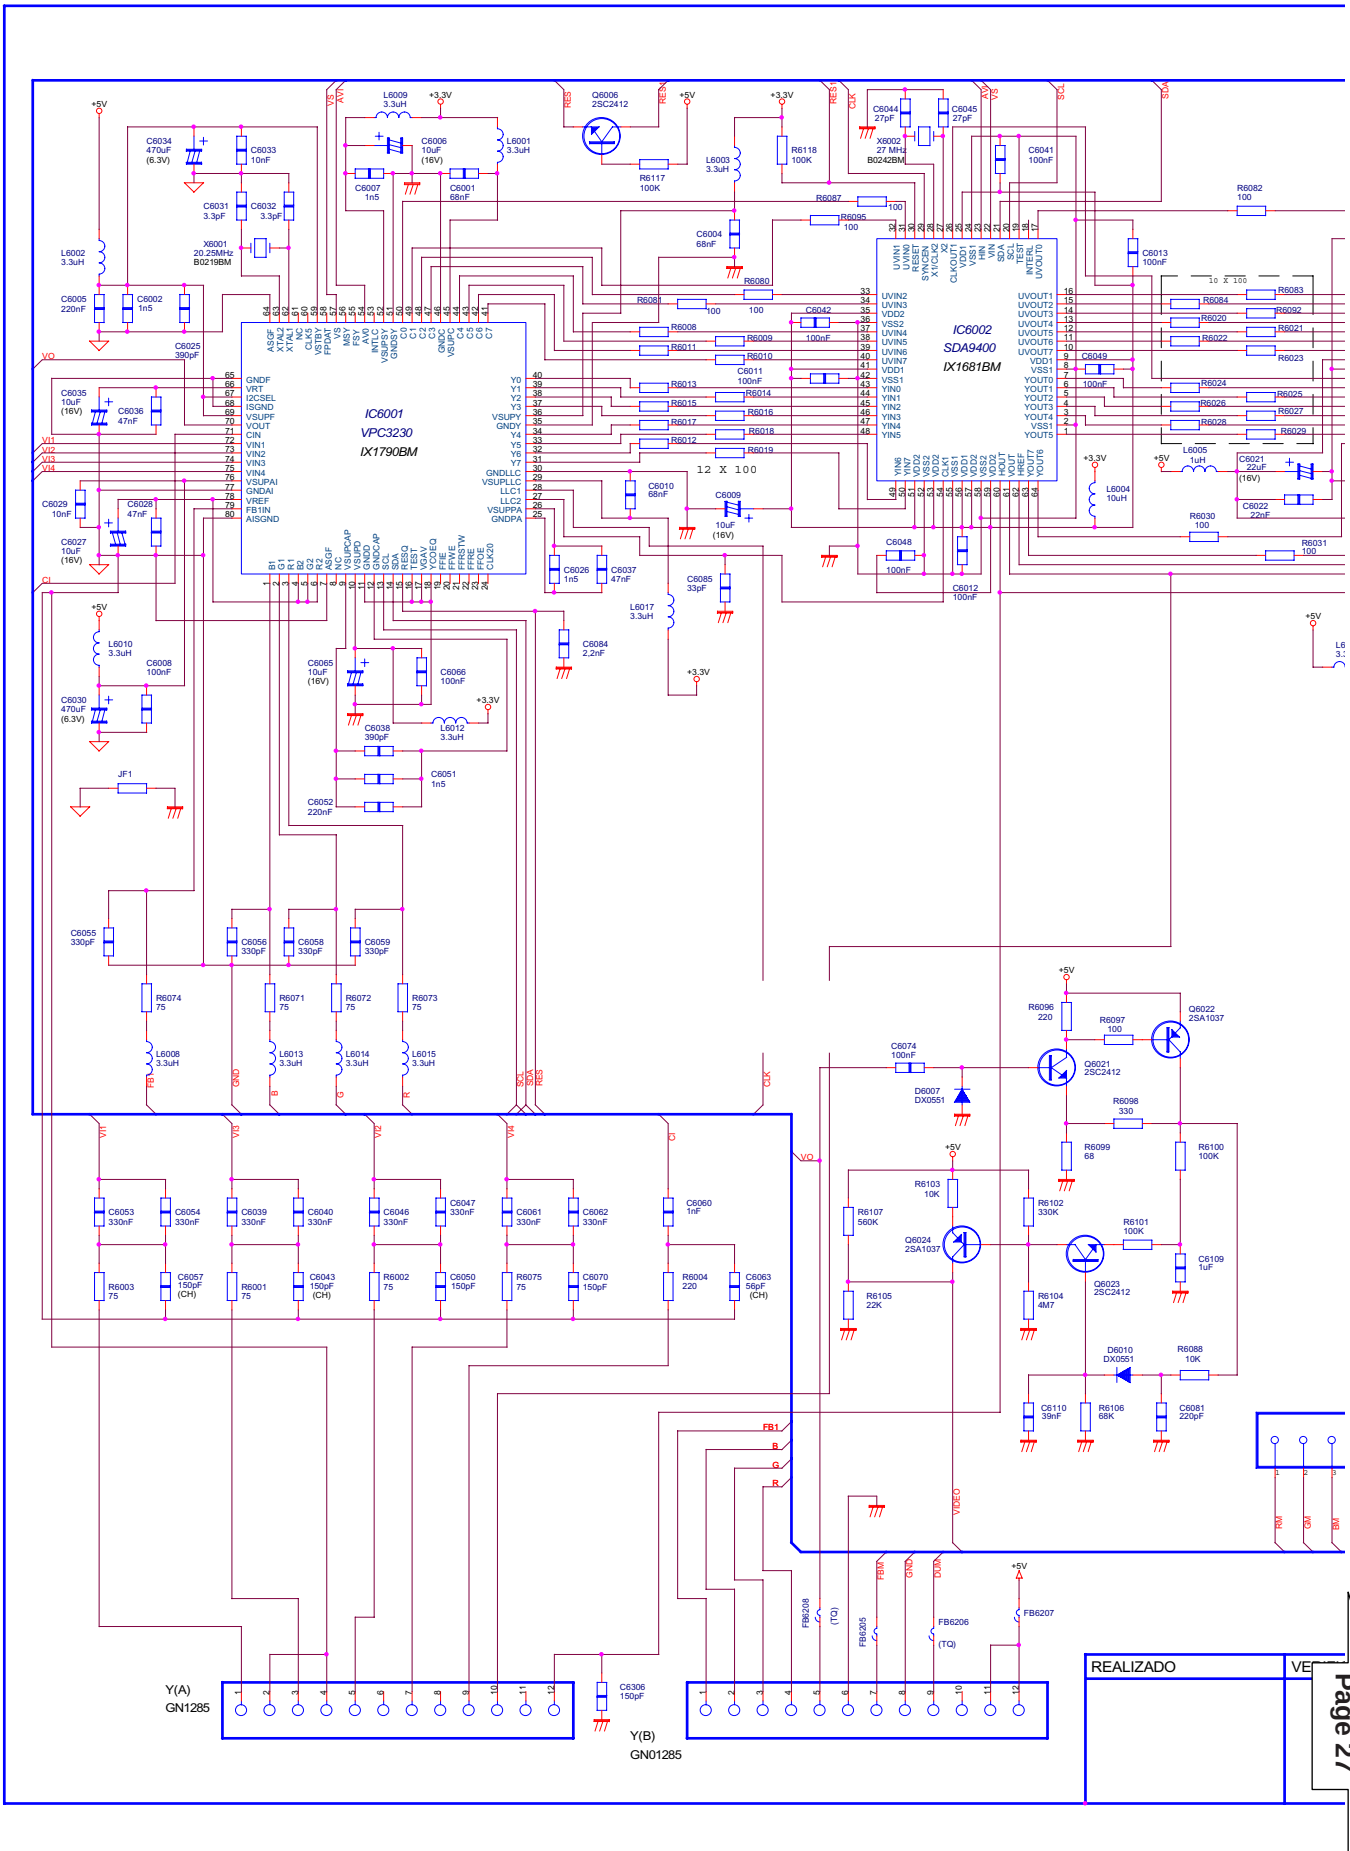

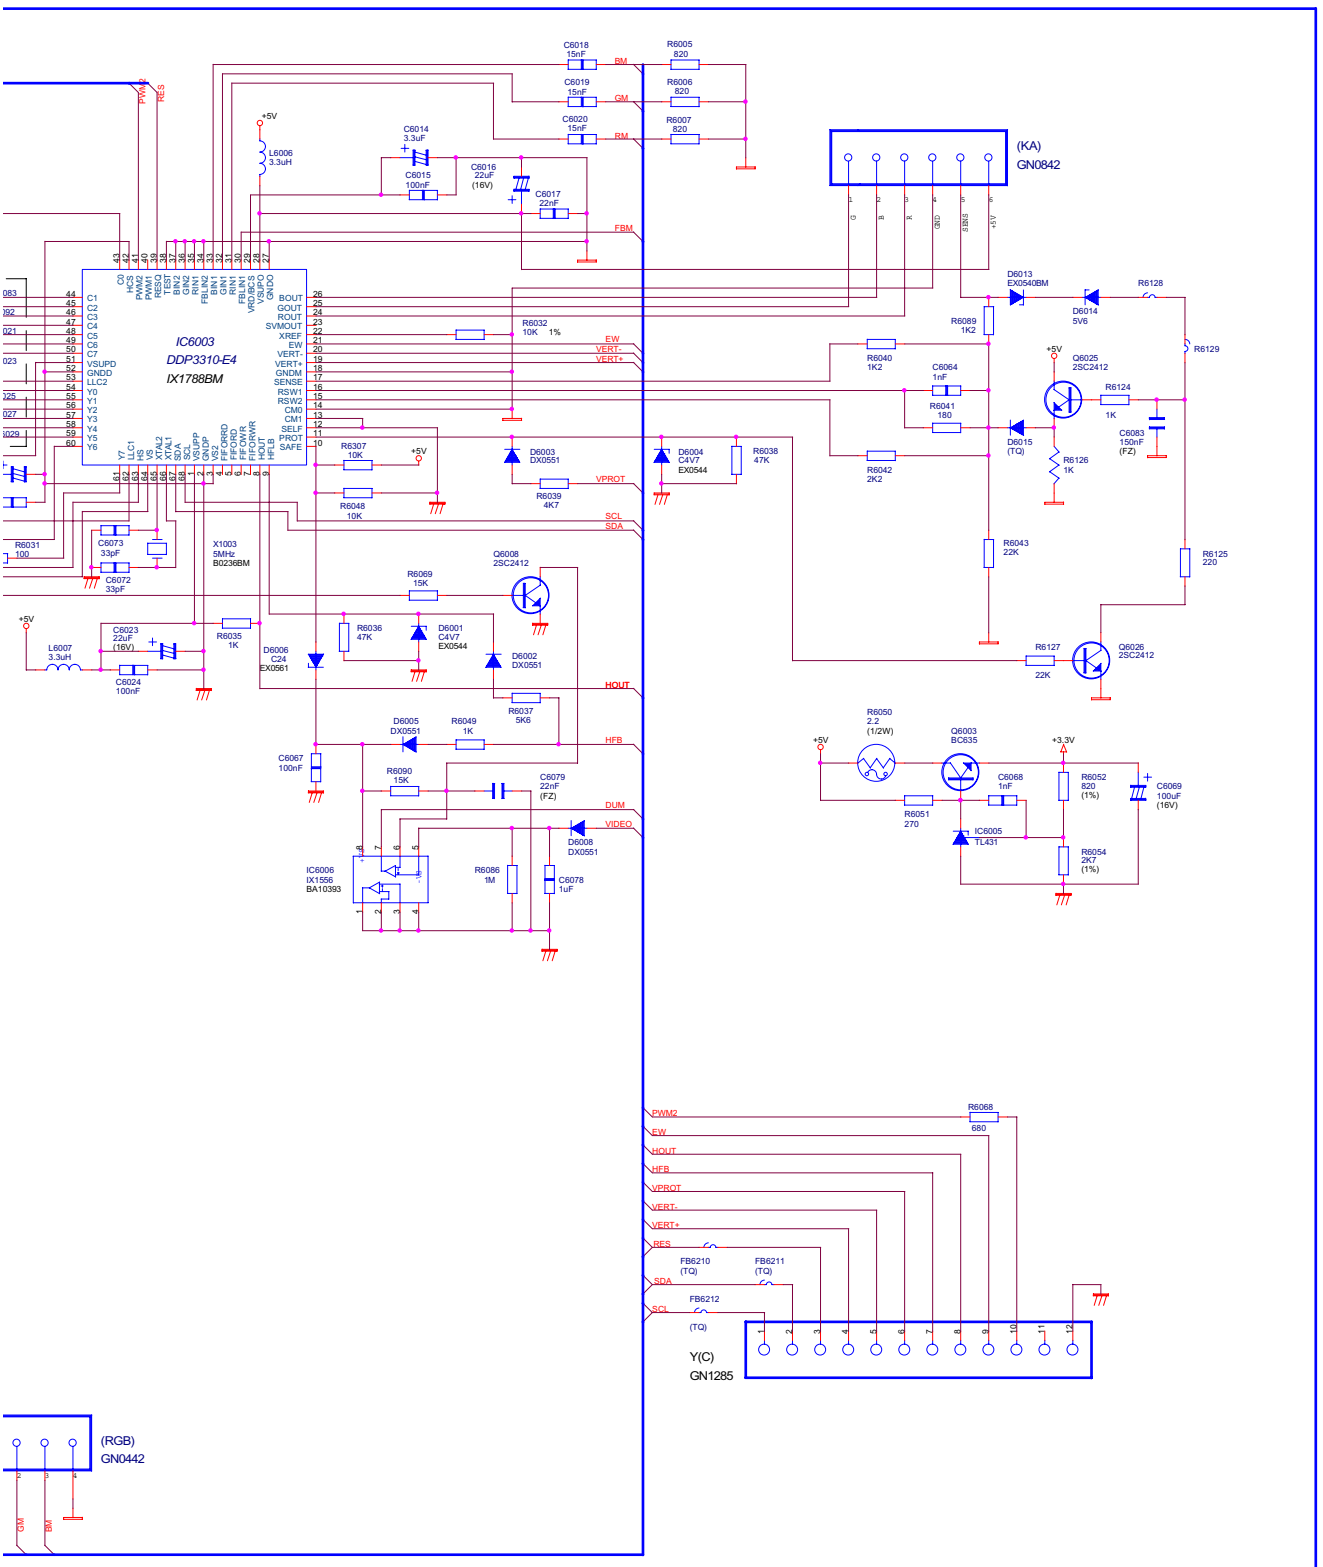

8	9	10	11	12	13	14							

I	H	G	F	E	D	C	B	A					

Page 26

| FICADO | APROBADO | NOMBRE | CODIGO | | | | | | | | | | | | |

CRT MODULE SCHEMATIC DIAGRAM.

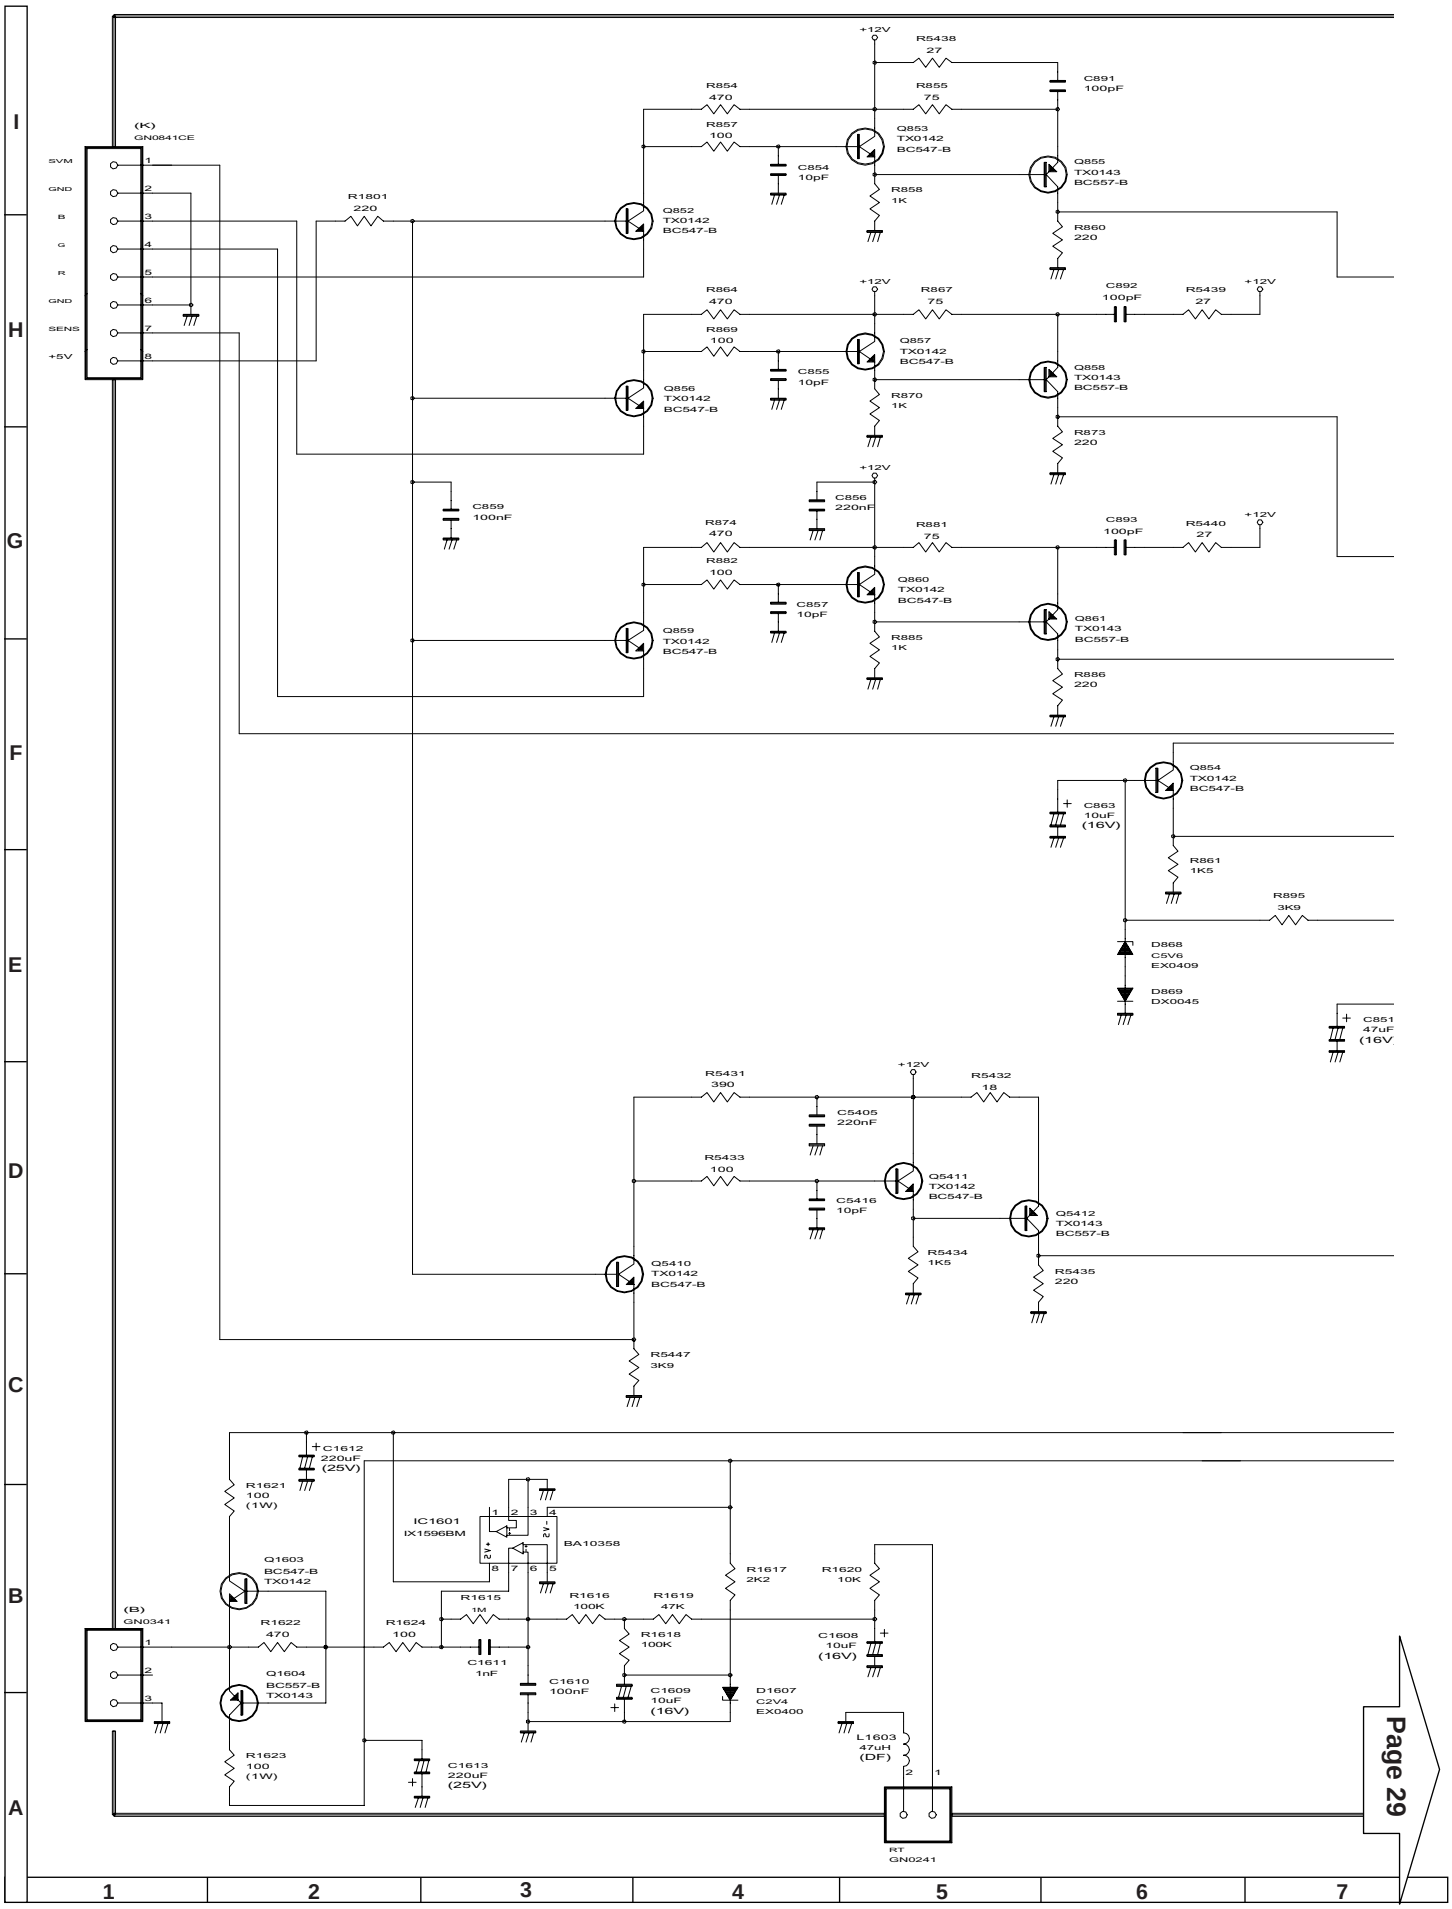

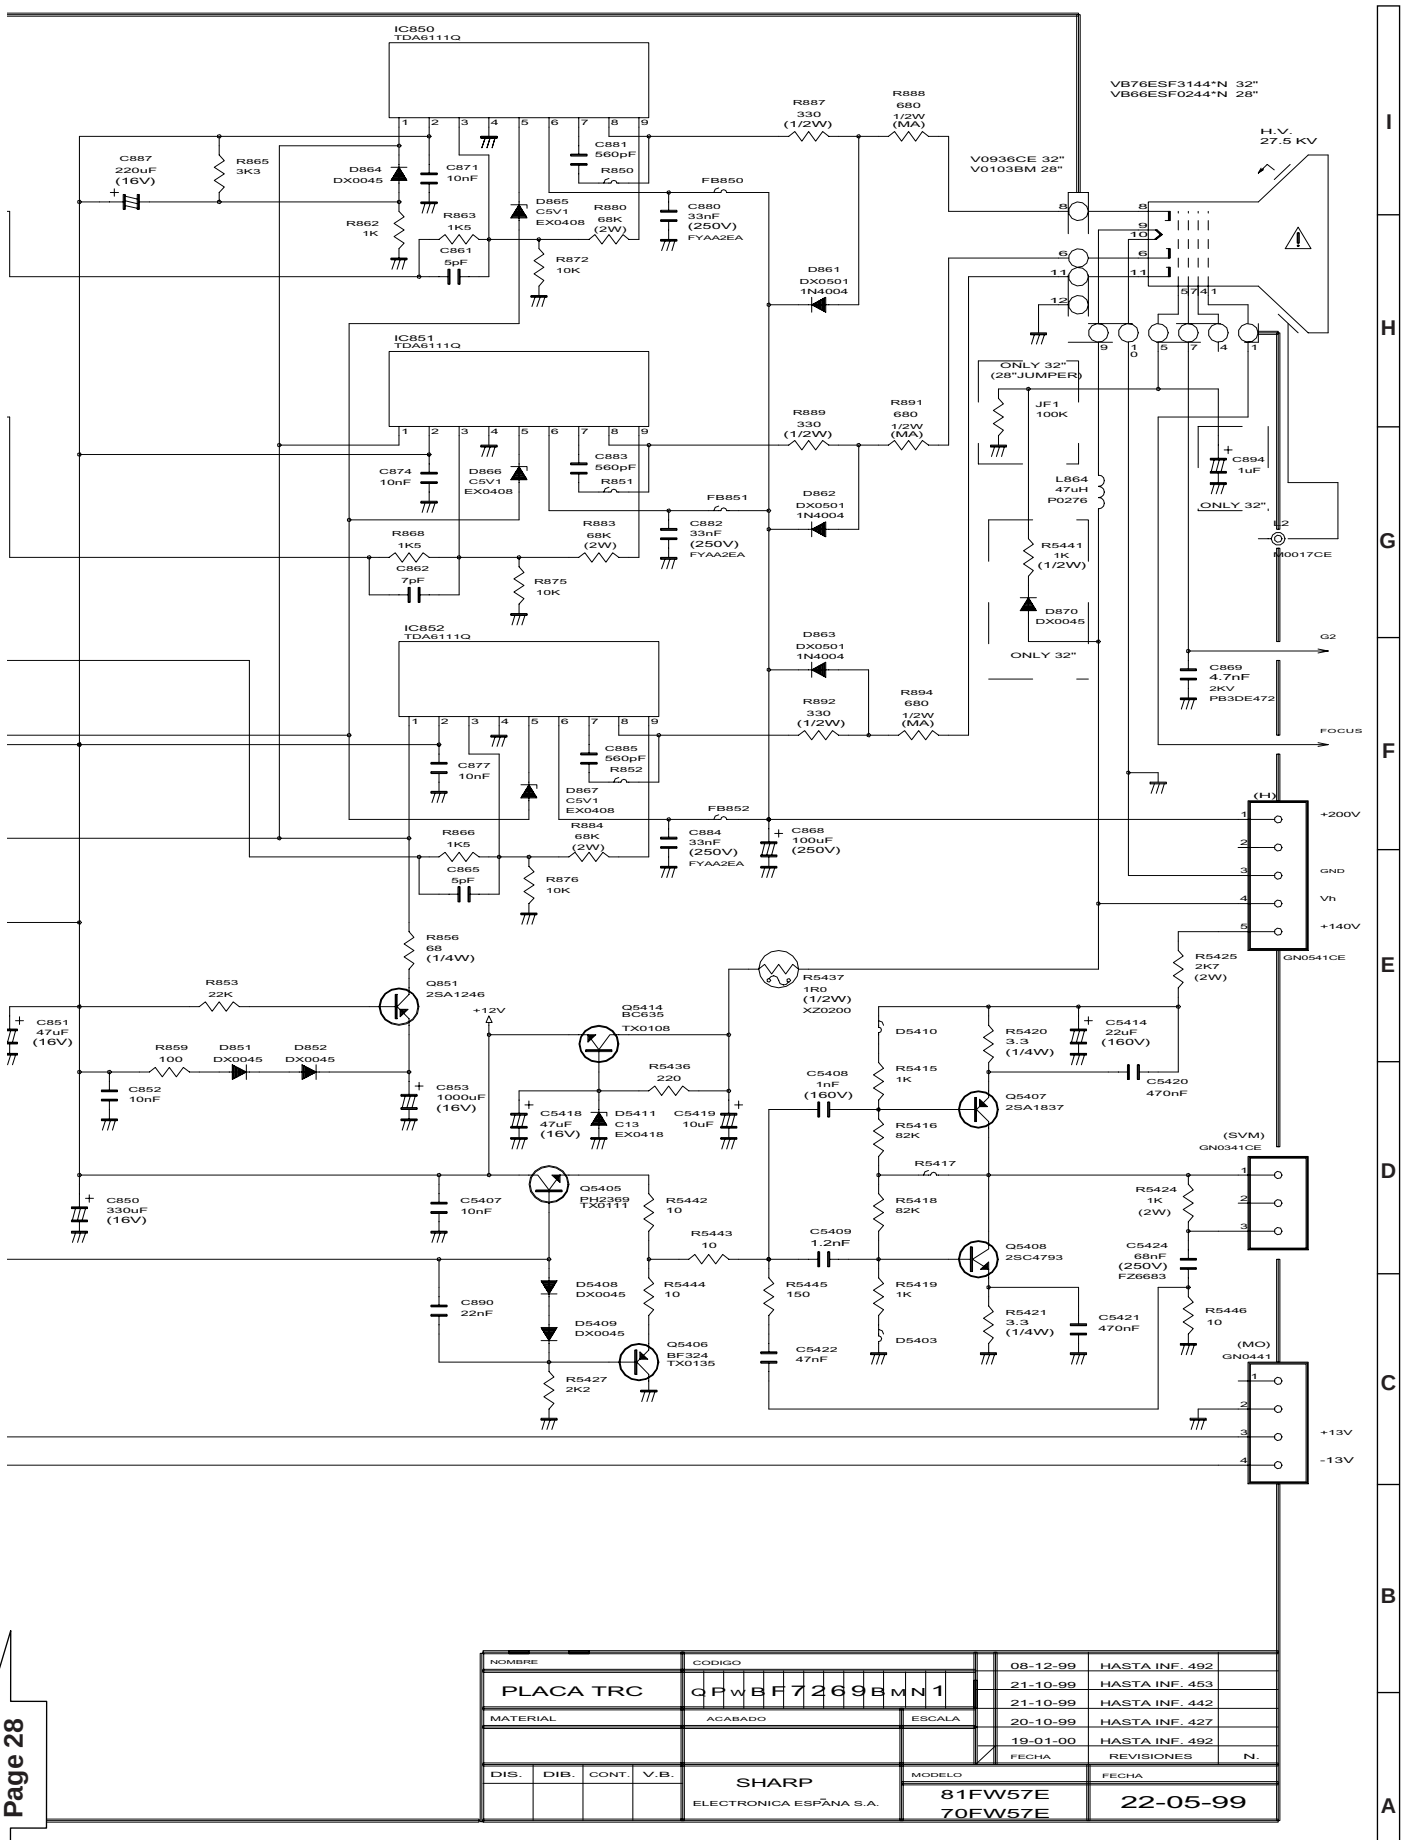

NOMBRE	CODIGO		
PLACA TRC	CPwBF72698MN1	08-12-99	HASTA INF. 492
		21-10-99	HASTA INF. 453
MATERIAL	ACABADO	21-10-99	HASTA INF. 442
		20-10-99	HASTA INF. 427
		19-01-00	HASTA INF. 492
		FECHA	REVISIONES N.

DIS.	DIB.	CONT.	V.B.		MODELO	FECHA
				SHARP ELECTRONICA ESPÃNA S.A.	81FW57E 70FW57E	22-05-99

DINAMIC FOCUS SCHEMATIC DIAGRAM (81FW57E only).

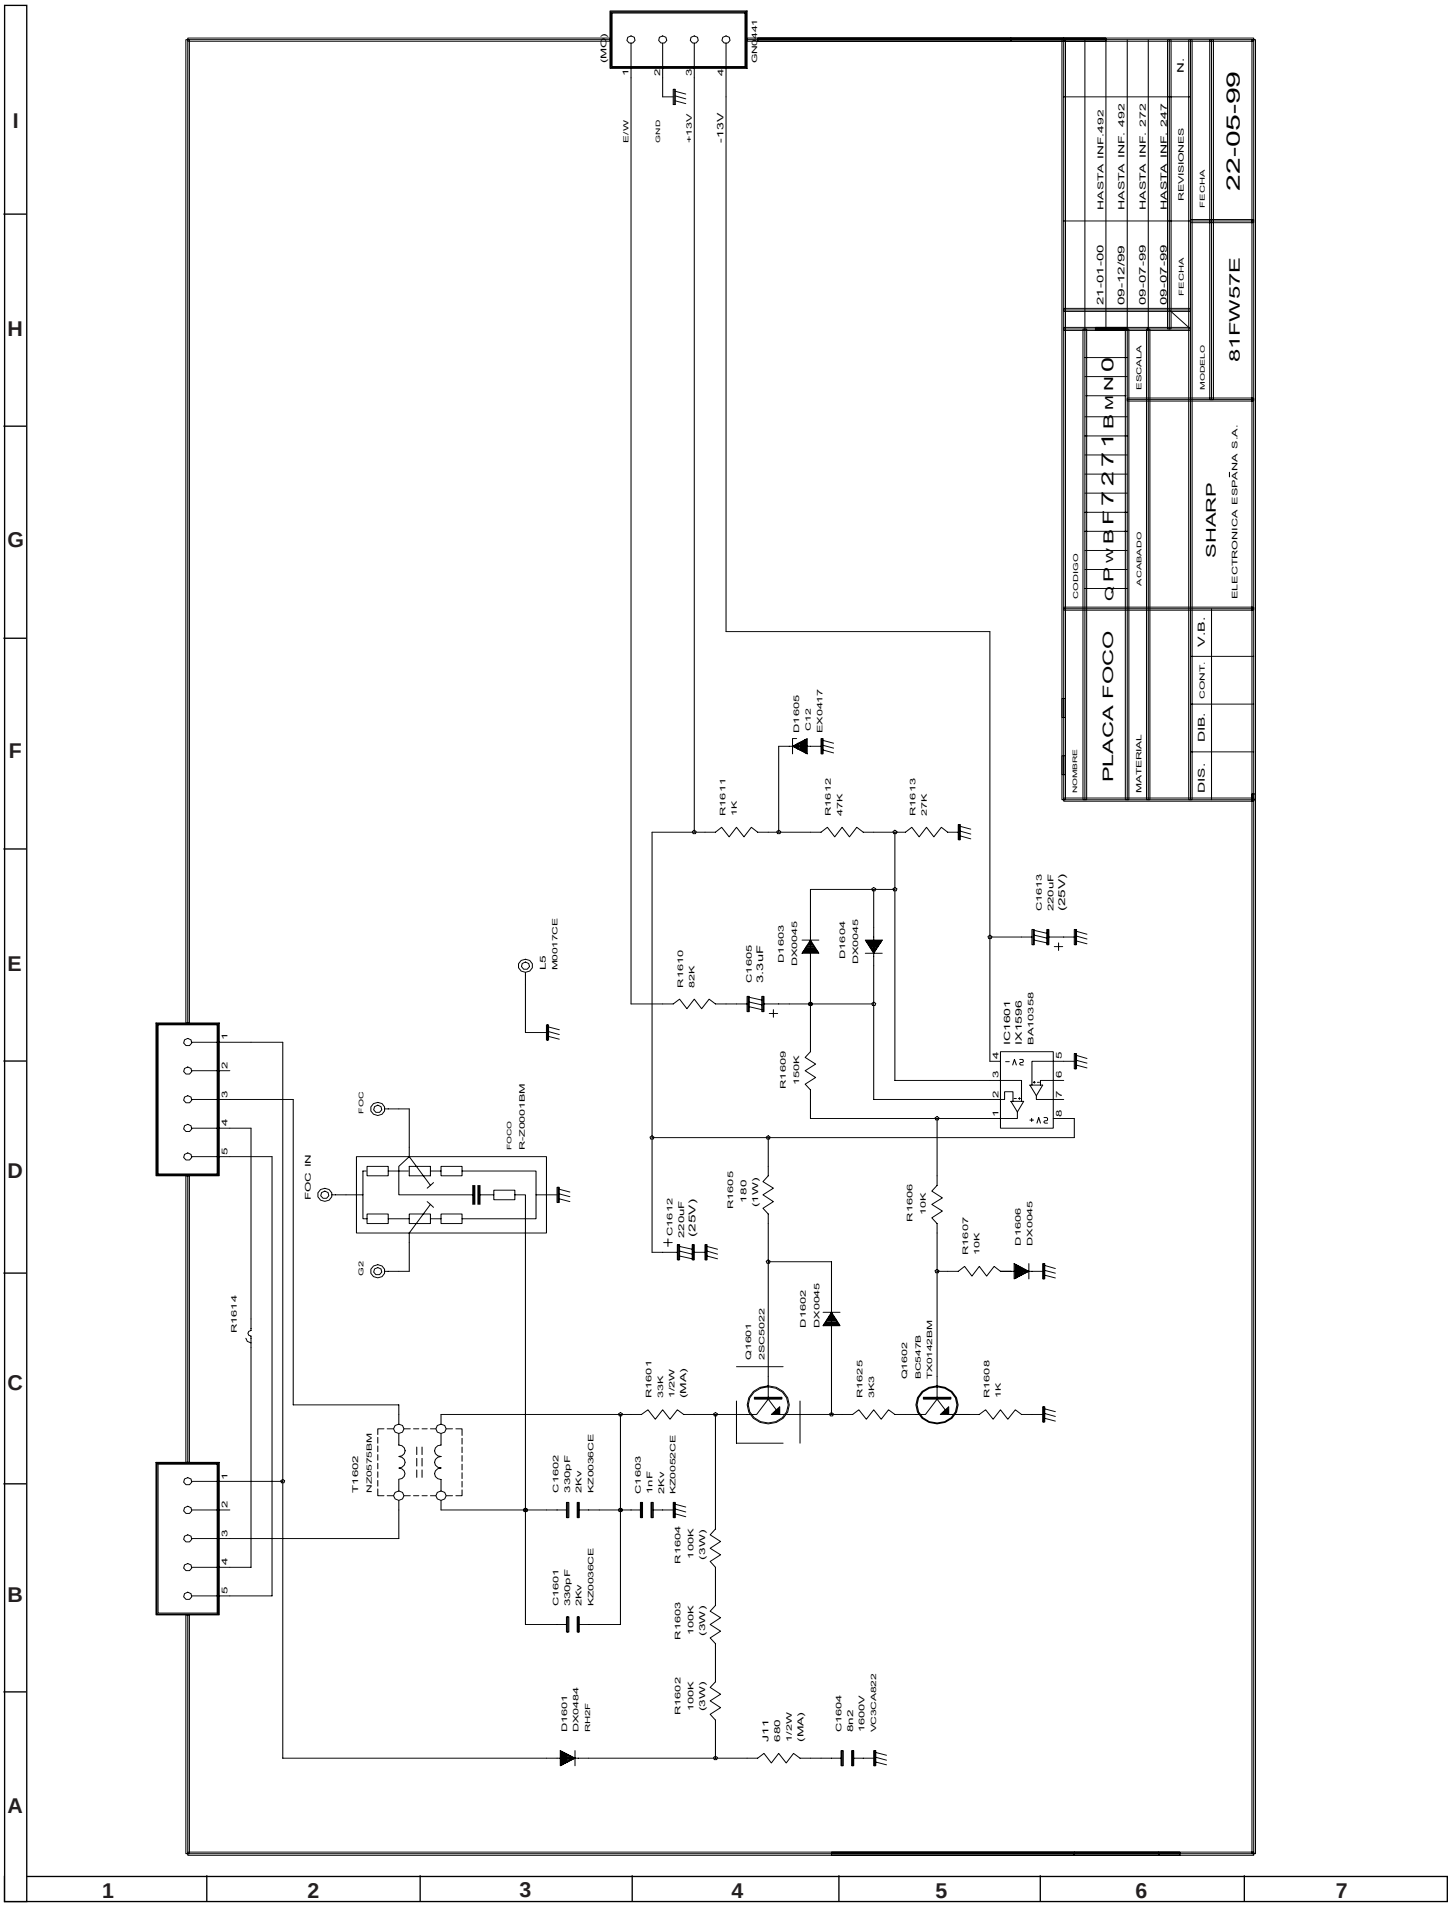

POWER SWITCH SCHEMATIC DIAGRAM.

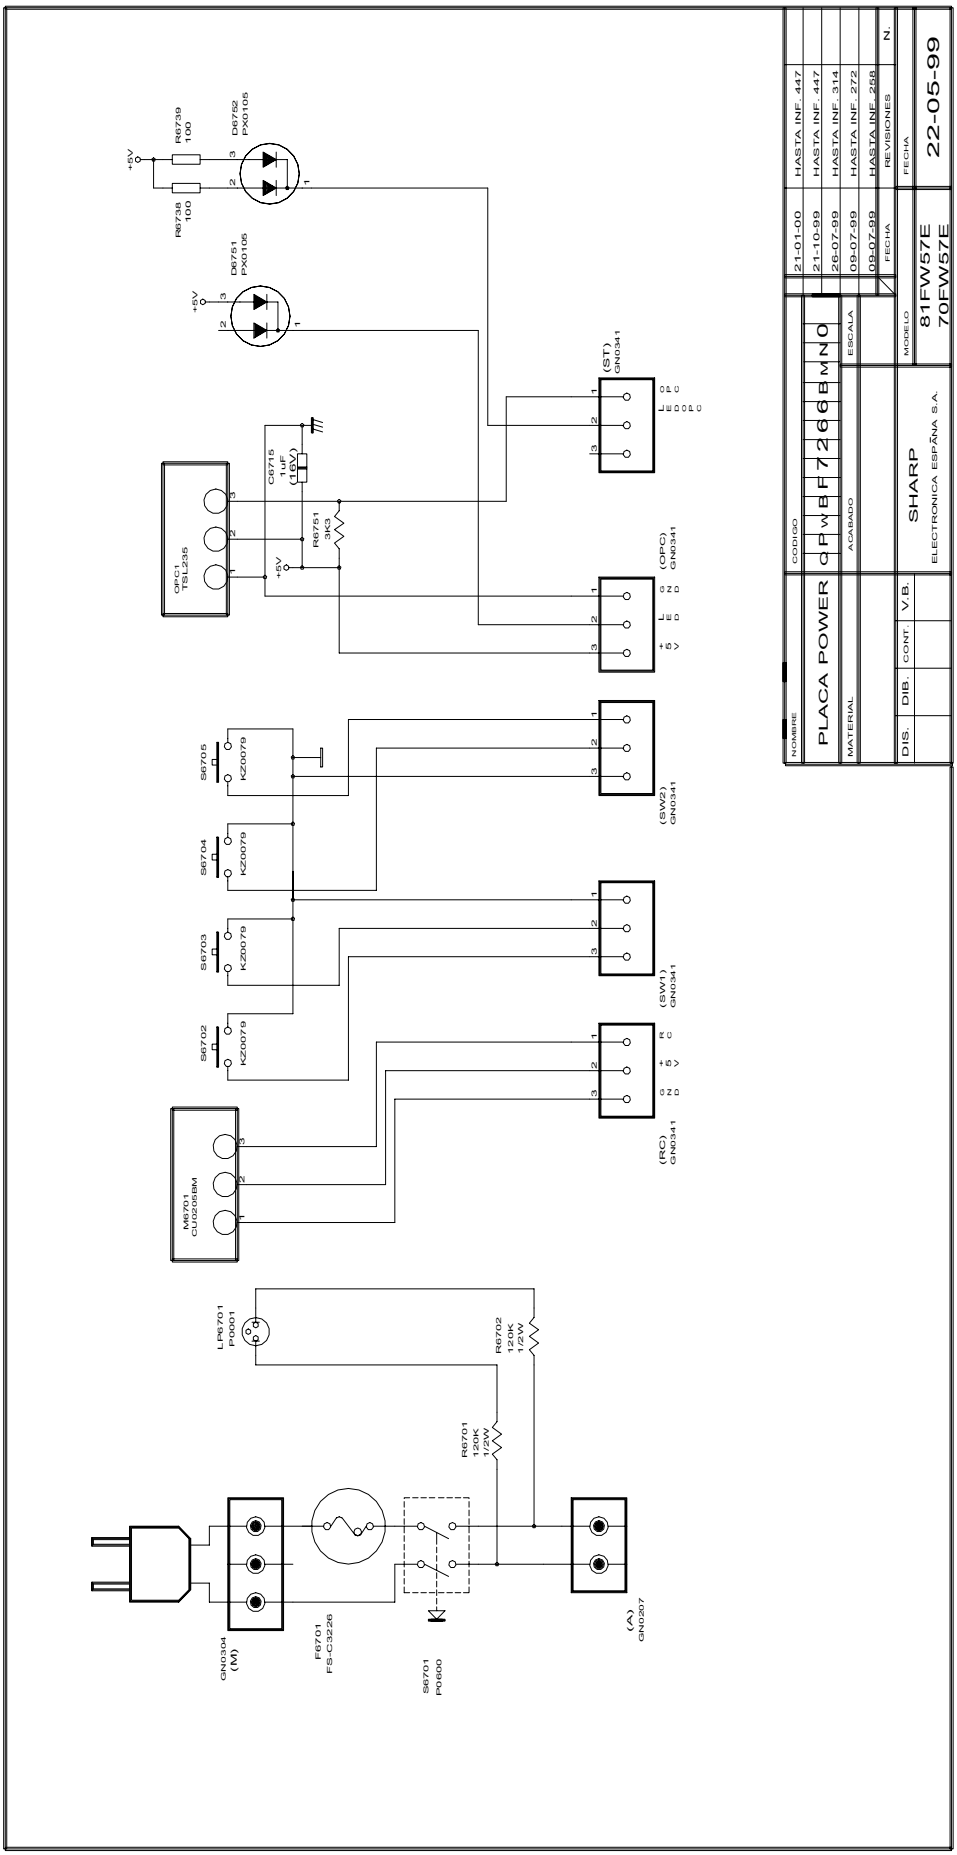

FRONT A/V SCHEMATIC DIAGRAM.

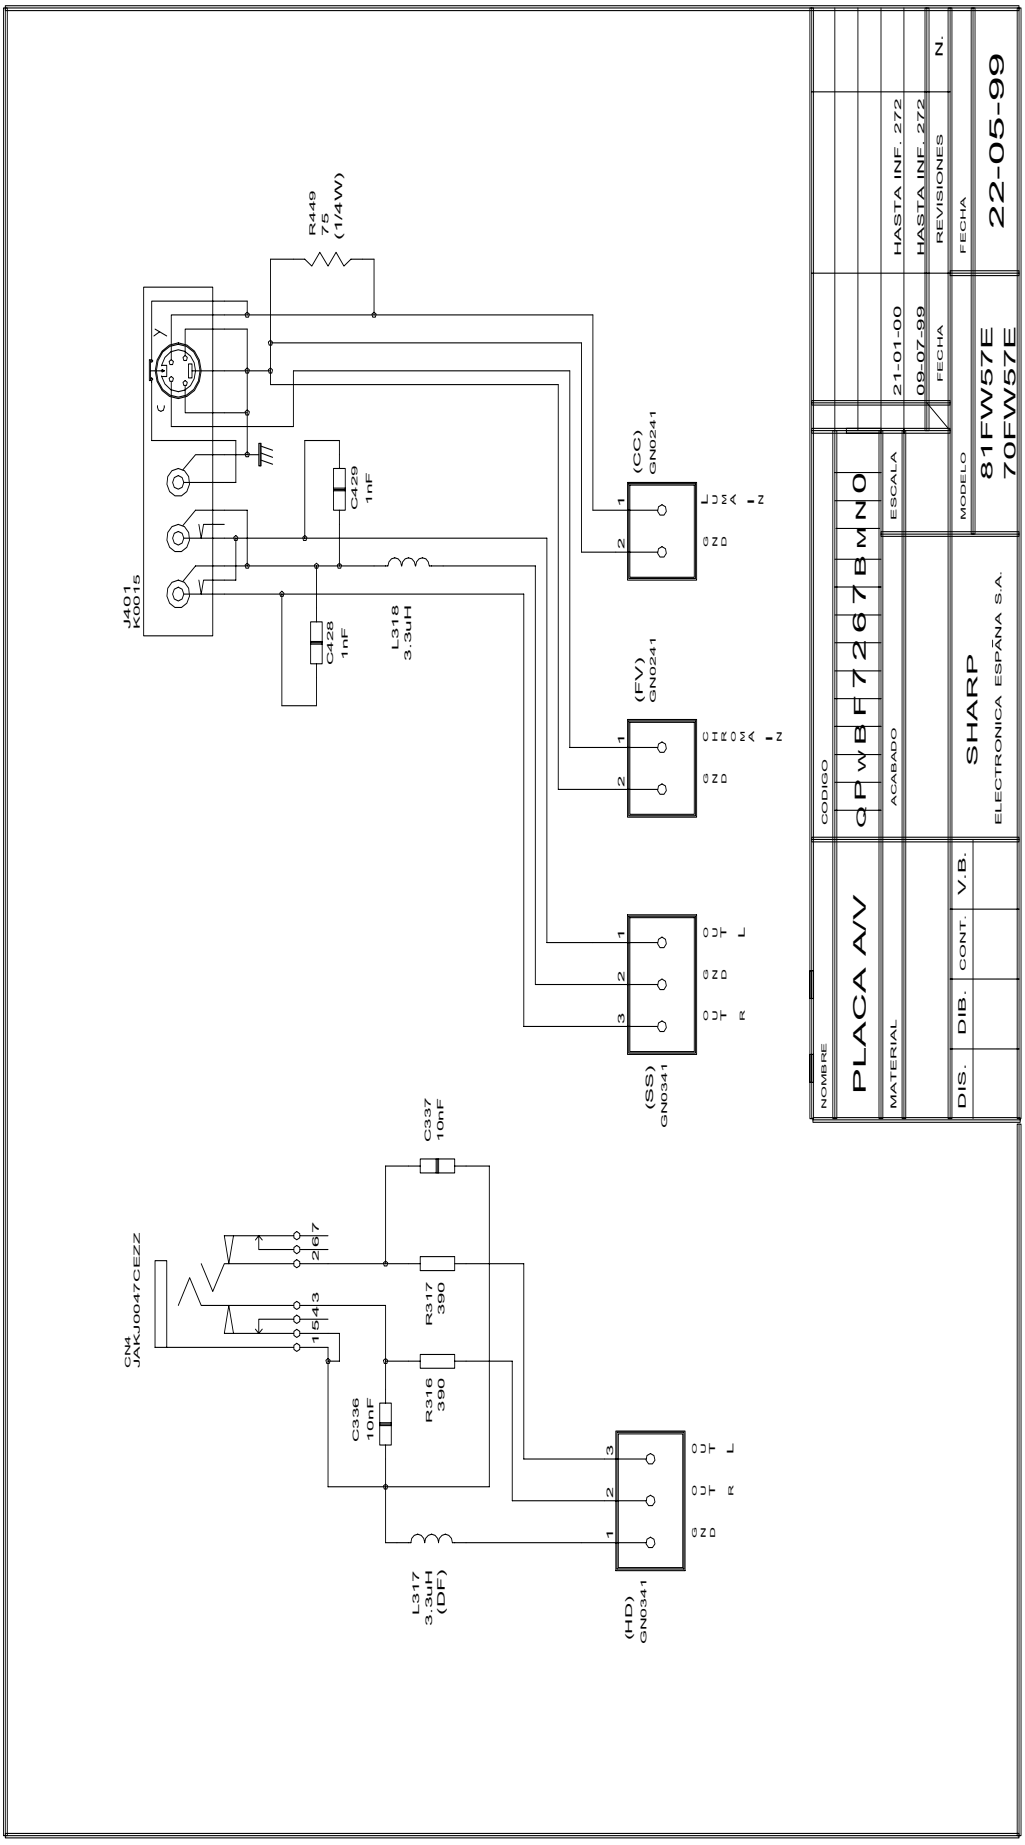

CENTRAL SPEAKER UNIT SCHEMATIC DIAGRAM.

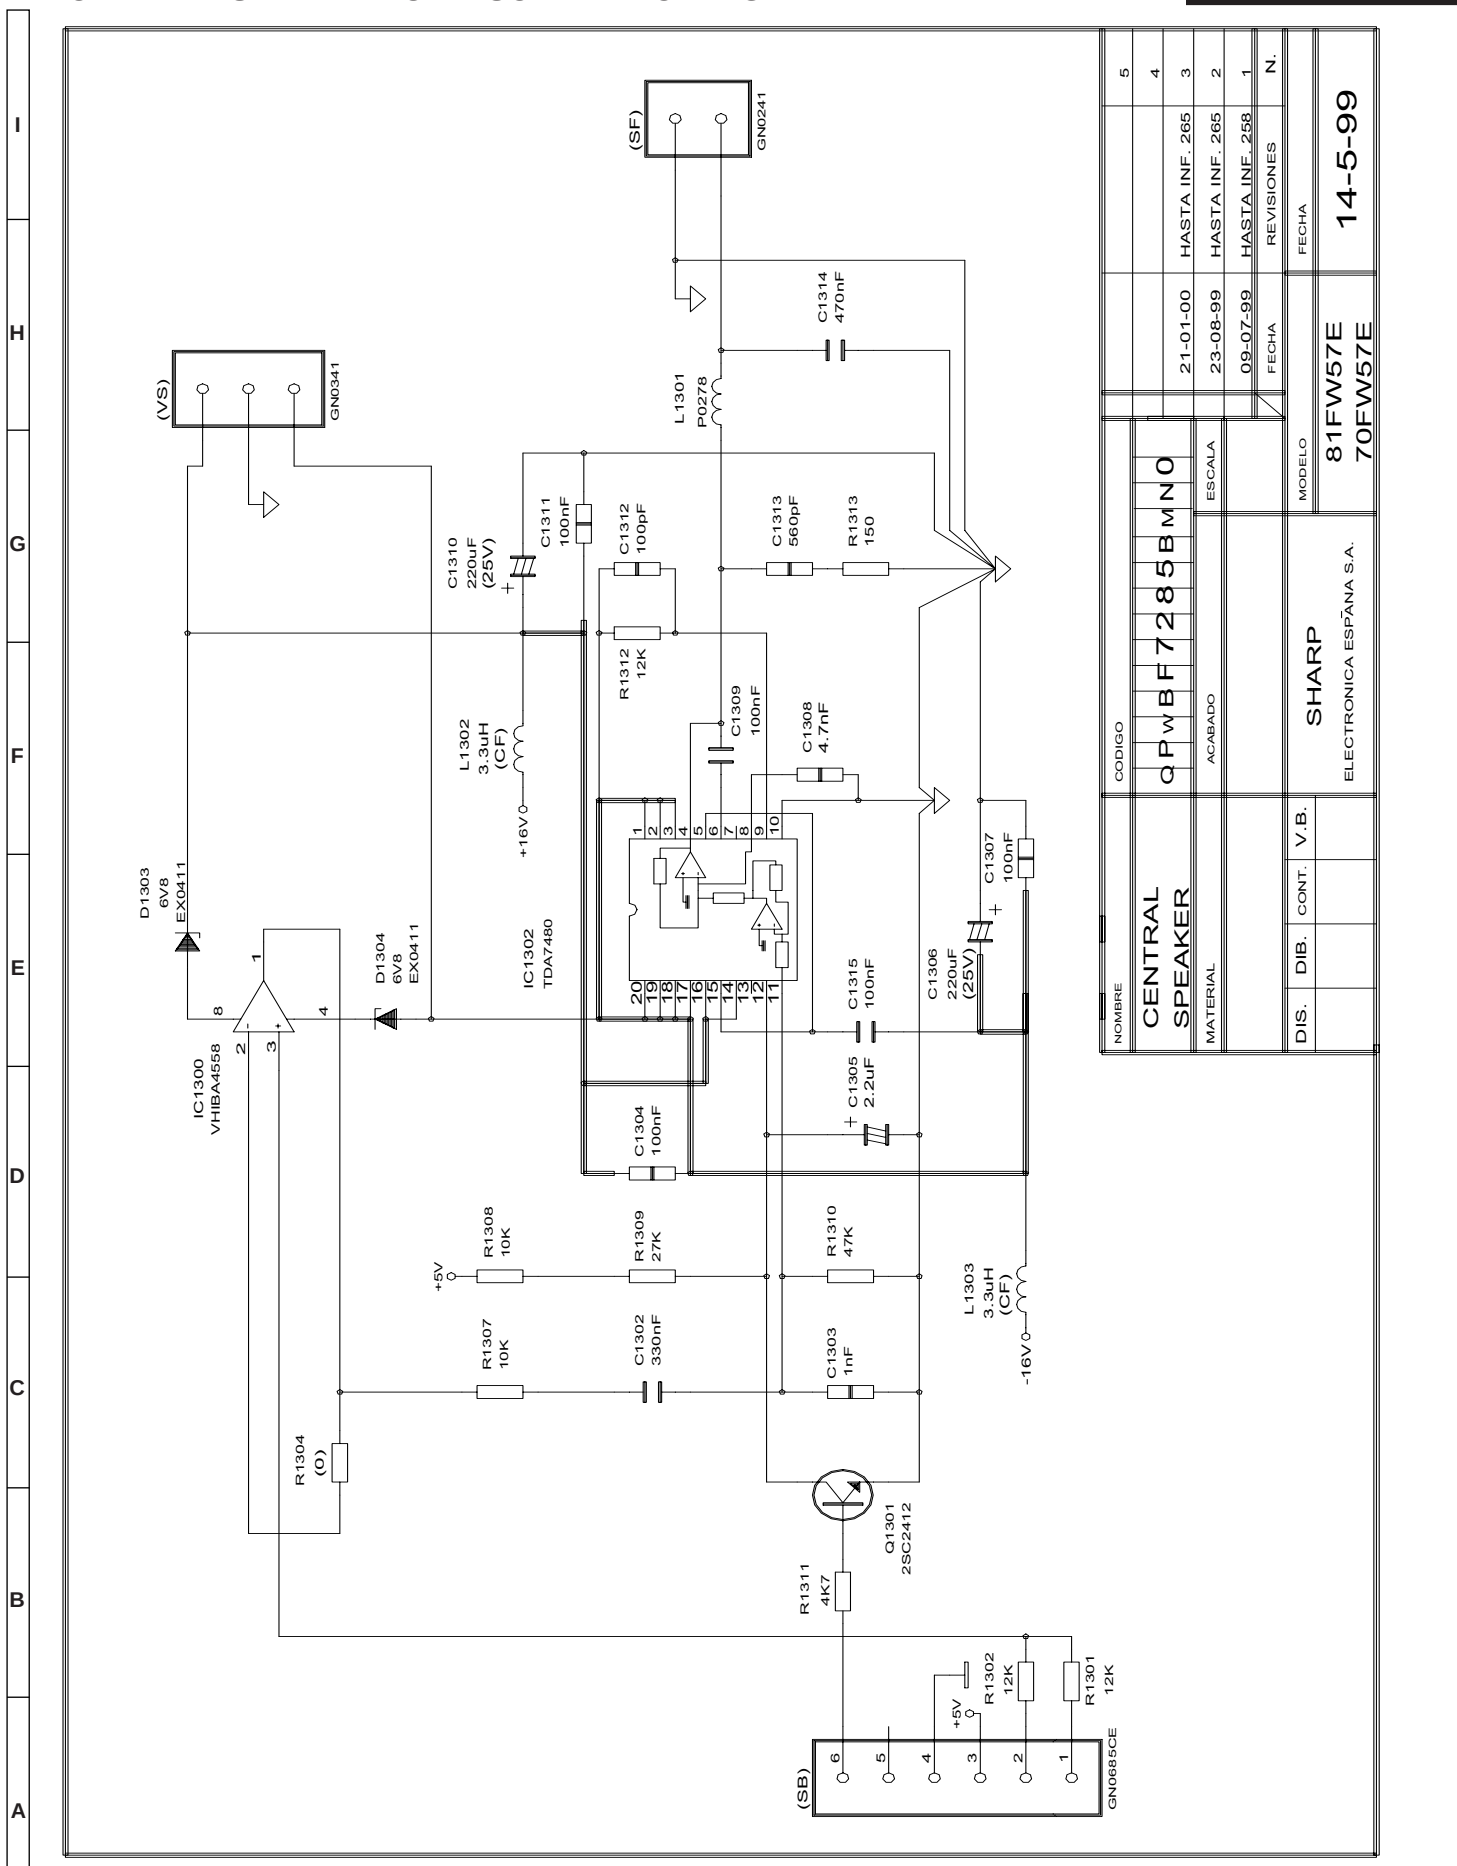

81FW-57E BLOCK DIAGRAM

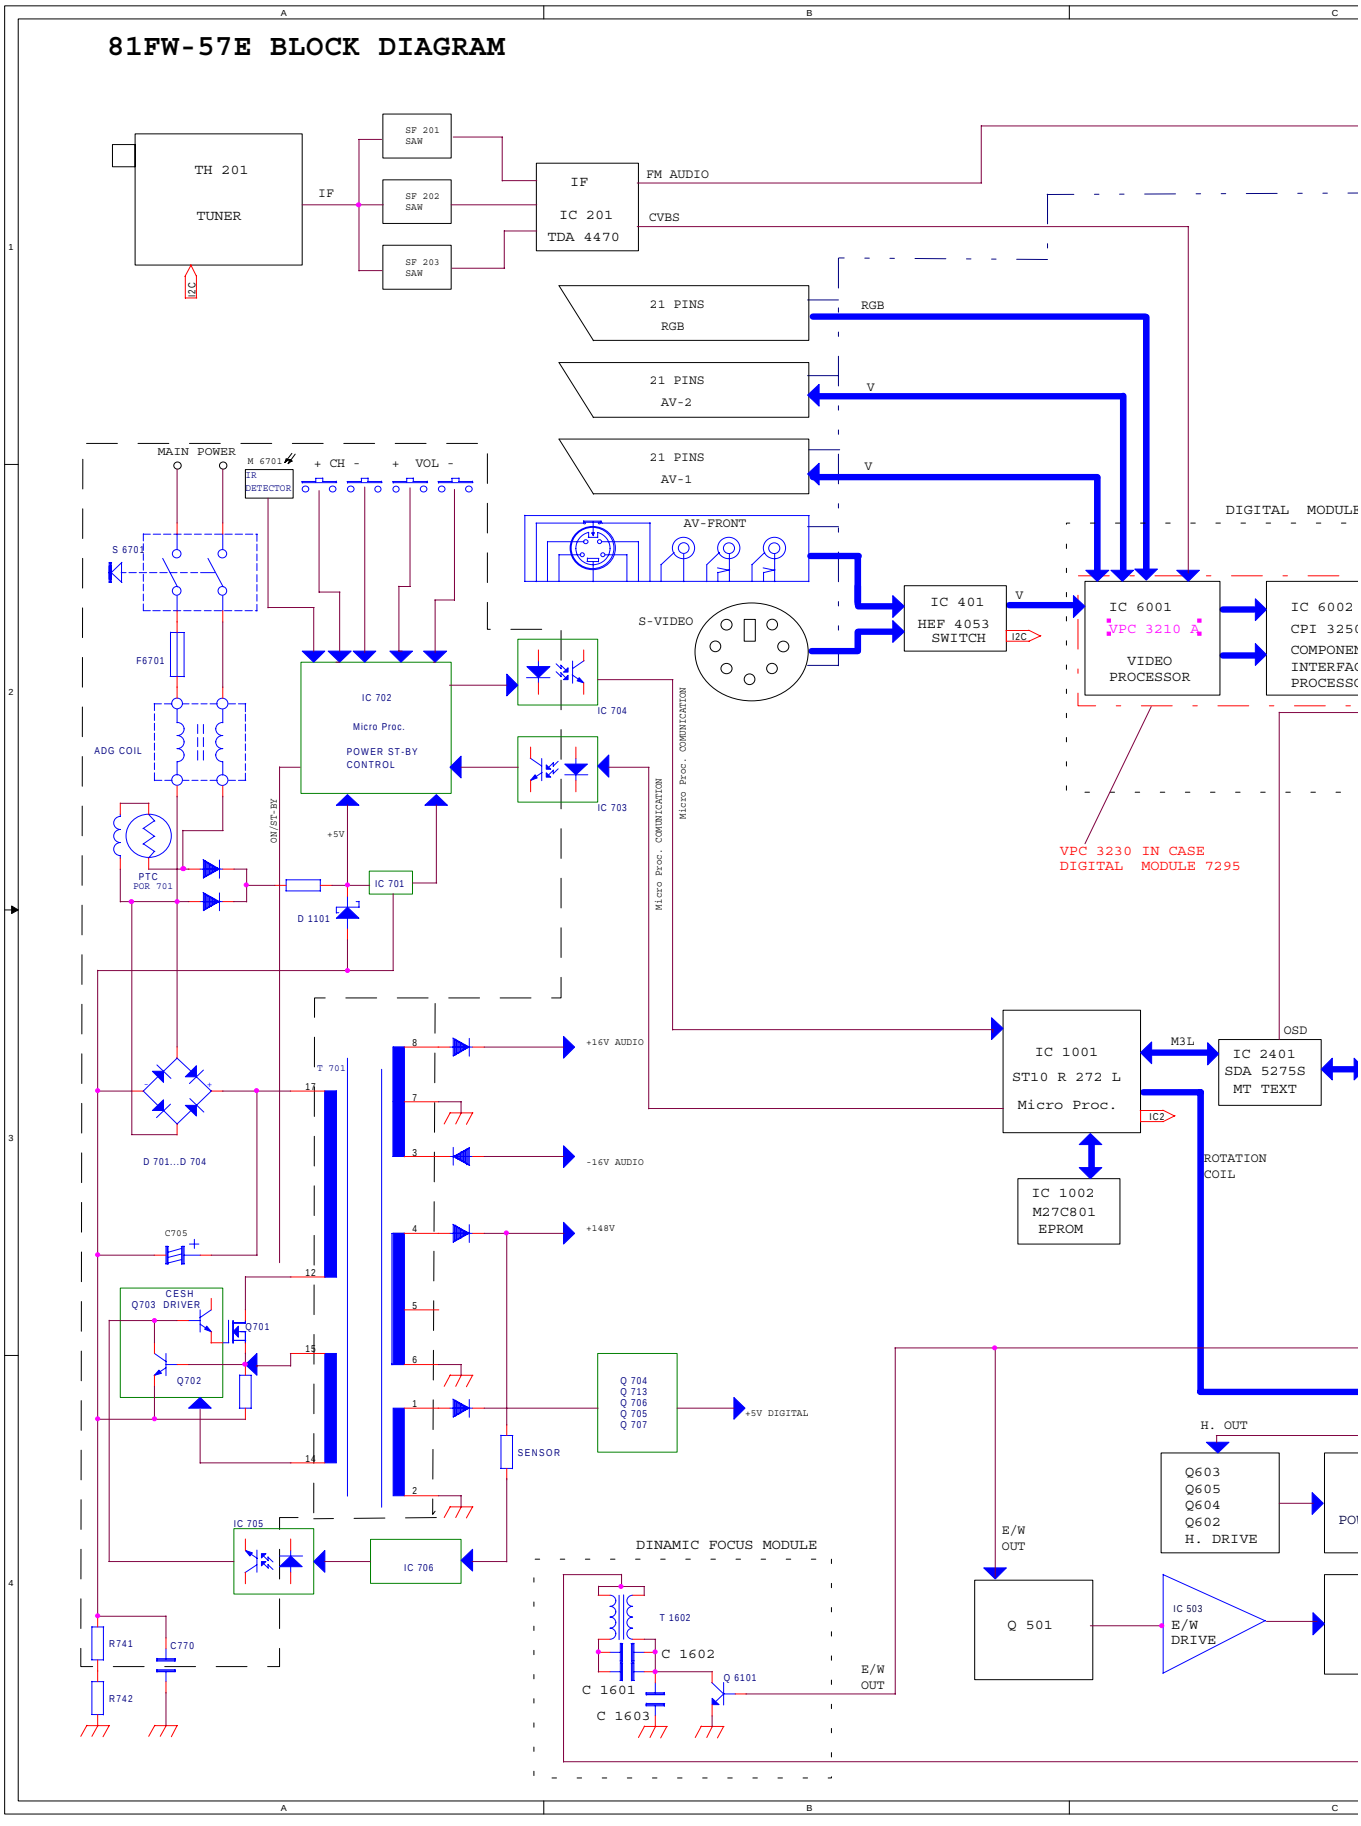

Page 35

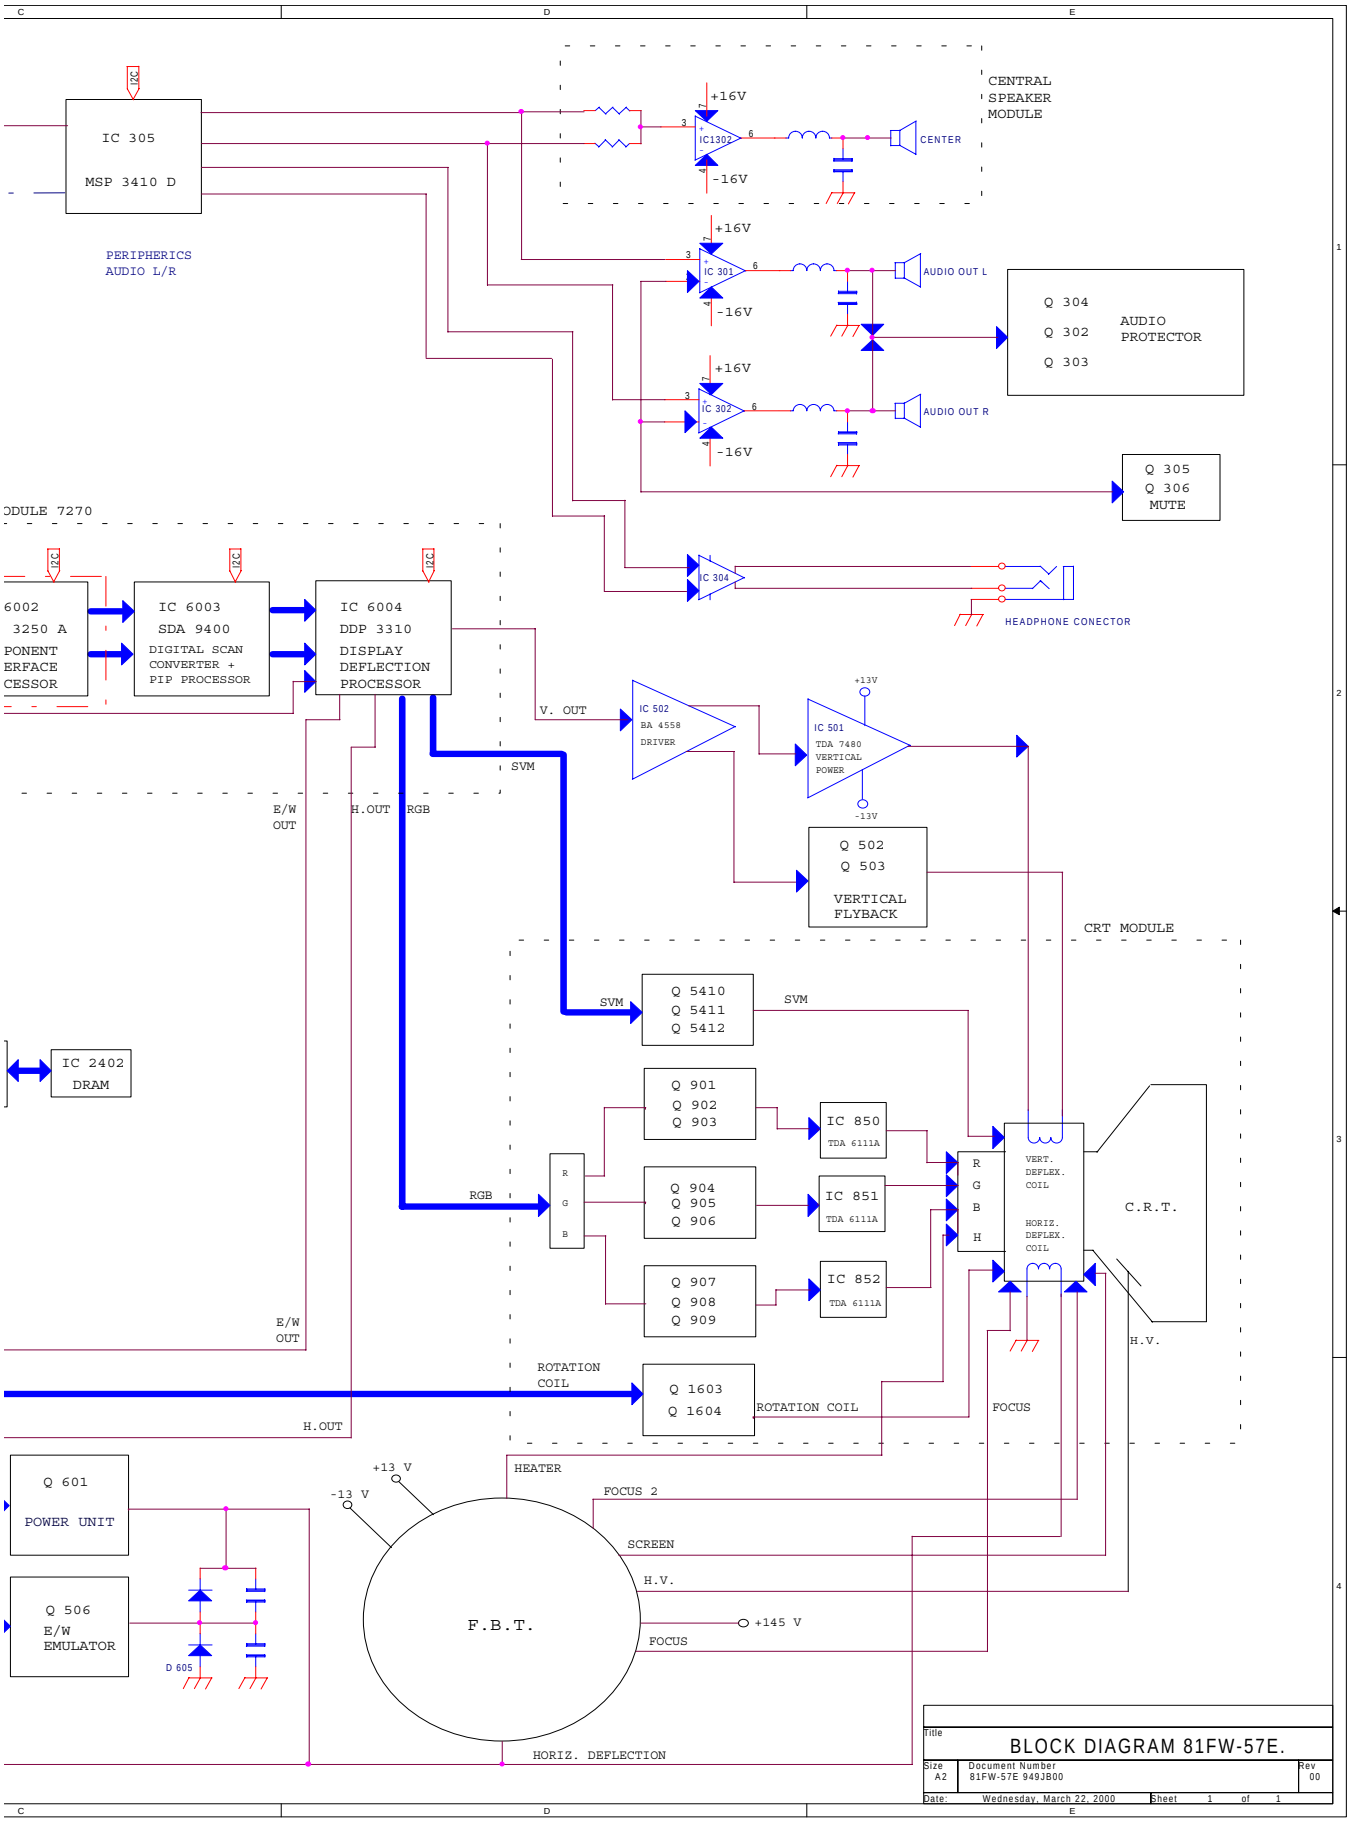
IC 305
MSP 3410 D
PERIPHERICS
AUDIO L/R
CENTRAL
SPEAKER
MODULE
+16V
IC1302
CENTER
-16V
IC 301
AUDIO OUT L
IC 302
AUDIO OUT R
Q 304
Q 302
Q 303
AUDIO
PROTECTOR
Q 305
Q 306
MUTE
IC 304
HEADPHONE CONECTOR
ODULE 7270
6002
3250 A
PONENT
ERFACE
CESSOR
IC 6003
SDA 9400
DIGITAL SCAN
CONVERTER +
PIP PROCESSOR
IC 6004
DDP 3310
DISPLAY
DEFLECTION
PROCESSOR
V. OUT
IC 502
BA 4558
DRIVER
IC 501
TDA 7480
VERTICAL
POWER
+13V
-13V
Q 502
Q 503
VERTICAL
FLYBACK
SVM
E/W
OUT
H.OUT
RGB
CRT MODULE
IC 2402
DRAM
Q 5410
Q 5411
Q 5412
Q 901
Q 902
Q 903
IC 850
TDA 6111A
Q 904
Q 905
Q 906
IC 851
TDA 6111A
Q 907
Q 908
Q 909
IC 852
TDA 6111A
R
G
B
VERT.
DEFLEX.
COIL
HORIZ.
DEFLEX.
COIL
C.R.T.
H.V.
ROTATION
COIL
Q 1603
Q 1604
FOCUS
Q 601
POWER UNIT
Q 506
E/W
EMULATOR
D 605
+13 V
-13 V
F.B.T.
HEATER
FOCUS 2
SCREEN
+145 V
HORIZ. DEFLECTION
Title
BLOCK DIAGRAM 81FW-57E.
Size
A2
Document Number
81FW-57E 949JB00
Rev
00
Date:
Wednesday, March 22, 2000
Sheet
1
of
1

Page 34

70FW-57E BLOCK DIAGRAM

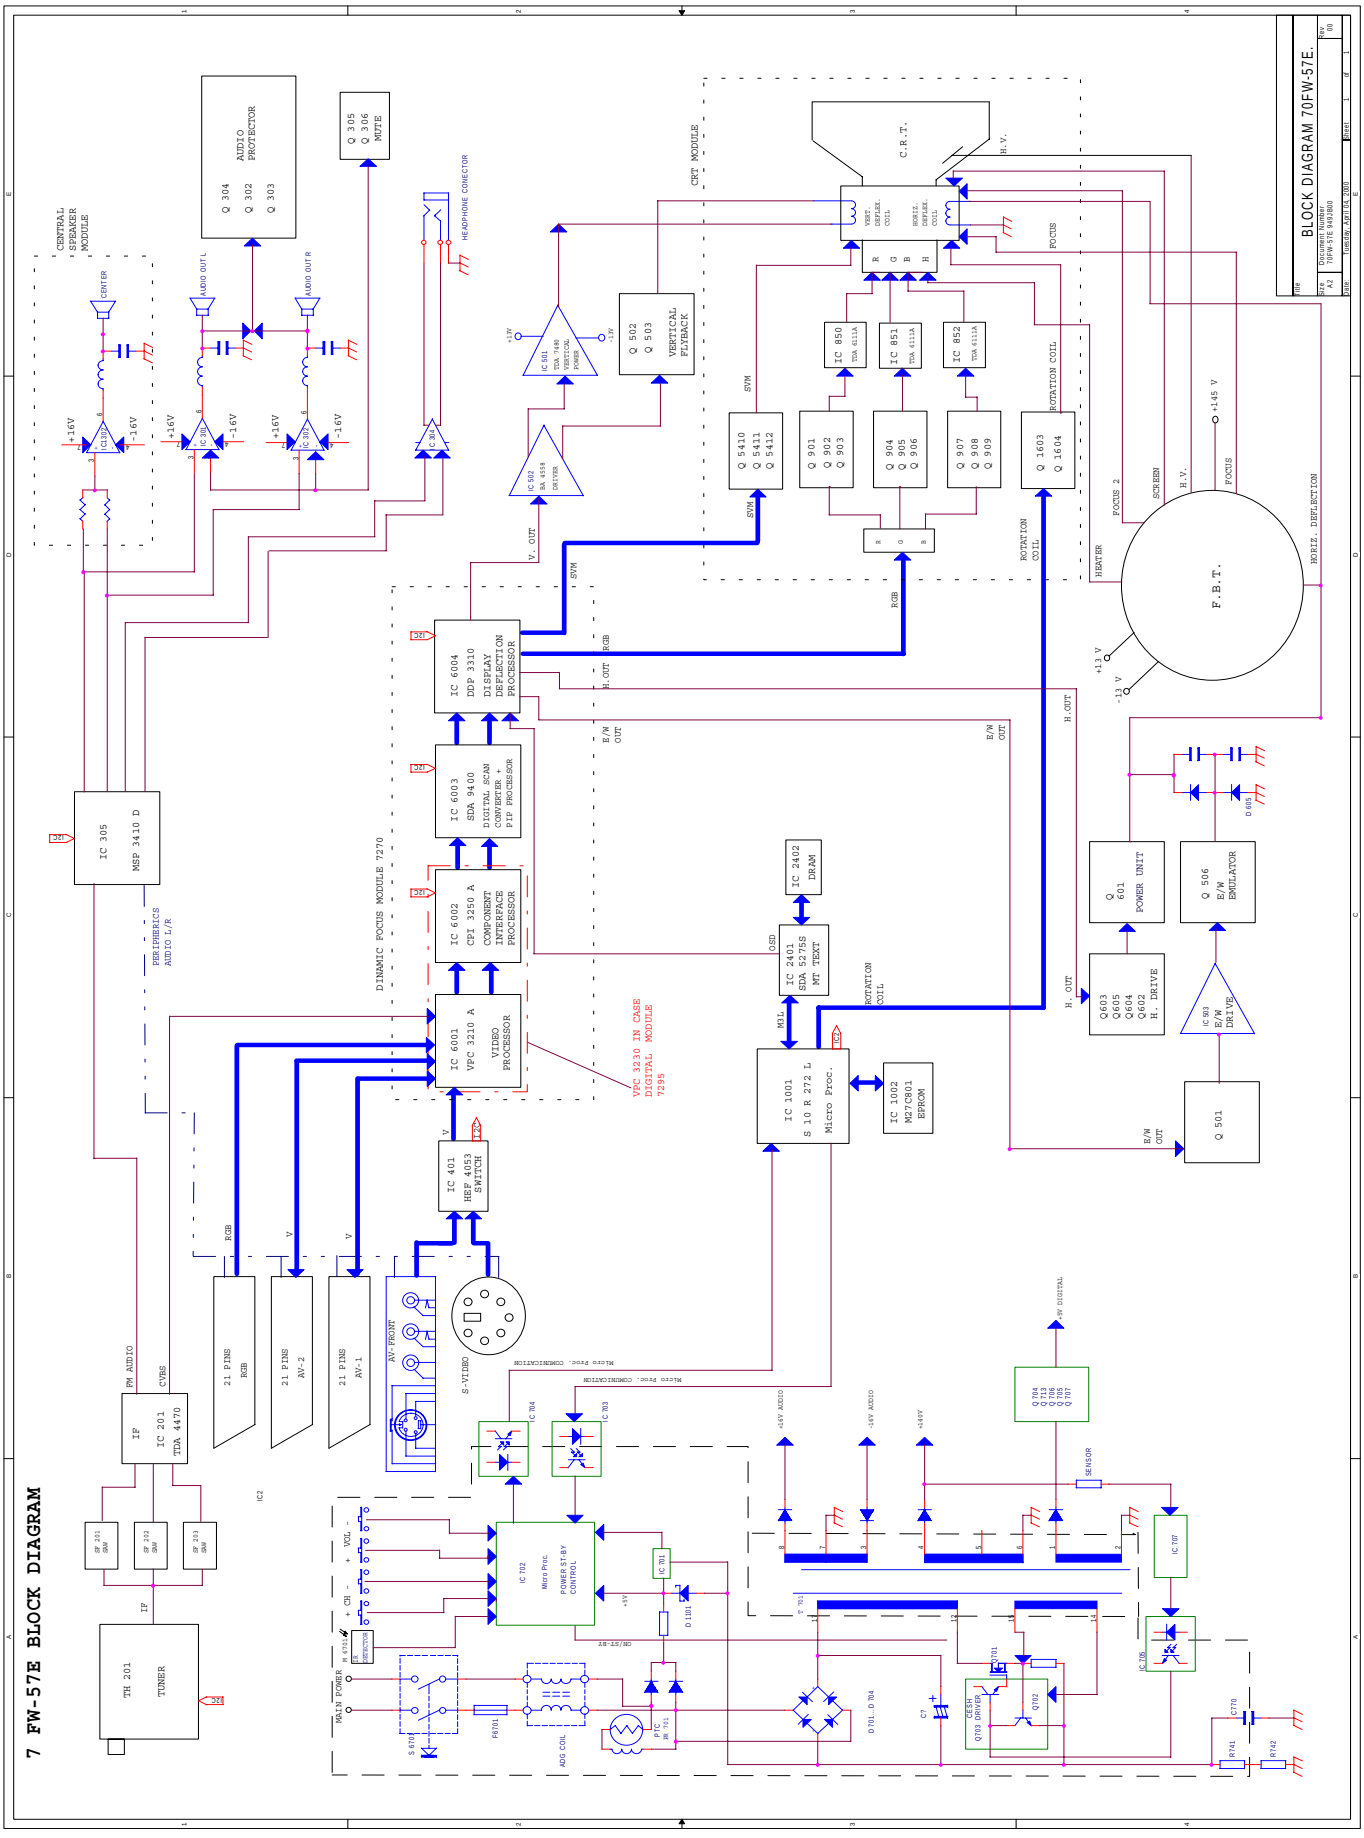

PART LIST

REPLACEMENT PARTS

Replacement parts which have special safety characteristics are identified in this manual. Electrical components having such features are identified by ⚠ in the Replacement Part List.
The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended is not permitted.
Replacement parts not shown in this service manual may create shock fire, or other hazards.

HOW TO ORDER REPLACEMENT PARTS

To have your order completed promplty and corretly please supply the following information.

1. MODEL NUMBER
2. REF. NO.
3. PART NO.
4. DESCRIPTION
5. CODE
6. QUANTITY

MARK *: SPARE PARTS DELIVERY SECTION

		PARTS	DESCRIPTION	*	SN CODE	EX CODE
			PICTURE TUBE			
⚠		VB66ESF0244*N	70FW57E CRT 16:9 28" PHILIPS	S	CQ	CT
⚠		VB76ESF3144*N	81FW57E CRT 16:9 32" PHILIPS	S	CQ	**
⚠		RCILG0417BMZZ	Degaussing Coil 70FW57E	S	AQ	AX
⚠		RCILG0421BMZZ	Degaussing Coil 81FW57E	S	AN	AZ
			PRINTED WIRING BOARDS (Not replacement item)			
	PWB-A	DUNTK7293CJV1	MOTHER UNIT 70FW57E-I/SE WITH K7295	S	--	--
	PWB-A	DUNTK7293CJV0	MOTHER UNIT 81FW57E-I/SE WITH K7295	S	--	--
	PWB-B	DUNTK7266BMV8	FRONTAL POWER 70FW57E-I/SE	S	--	--
	PWB-B	DUNTK7266BMV3	FRONTAL POWER 81FW57E-I/SE	S	--	--
	PWB-C	DUNTK7267BMV8	FRONTAL SIGNAL UNIT 70FW57E-I/SE	S	--	--
	PWB-C	DUNTK7267BMV3	FRONTAL SIGNAL UNIT 81FW57E	S	--	--
	PWB-D	DUNTK7269BMV2	UNIT CRT 70FW57E	S	--	--
	PWB-D	DUNTK7269BMV0	UNIT CRT 81FW57E	S	--	--
	PWB-E	DUNTK7285BMV6	AUDIO AMPLIFIER 70FW57E-I/SE	S	--	--
	PWB-E	DUNTK7285BMV1	AUDIO AMPLIFIER 81FW57E-I/SE	S	--	--
	PWB-F	DUNTK7270BMV4	7270 DIGITAL MODULE 70FW57E-I/SE	S	--	--
	PWB-F	DUNTK7270BMV1	7270 DIGITAL MODULE 81FW57E	S	--	--
	PWB-G	DUNTK7295BMV4	7295 DIGITAL MODULE	S	--	--
	PWB-H	DUNTK7271BMV2	DINAMIC FOCUS 81FW57E-I/SE	S	--	--
	PWB-A		**MOTHER UNIT (with K7295)**			
			TUNER			
	TH 0201	RTUNH0139BMZZ	TUNER CTT5020E	S	AP	BA
			INTEGRATED CIRCUITS			
	IC 050	RH-IX1786BMZZ	C.I. TDA 7480L THOMSON	S	AC	AK
	IC 0201	RH-IX1671BMZZ	IC TDA4470-MFL TEMIC SMD	S	AF	AQ
	IC 0202	RH-IX1556BMZZ	IC BA10393 S0P8 SMD ROHM	S	AC	AD
	IC 0203	RH-IX0037CEZZ	IC UPC574J 33V NEC	S	AF	AD
	IC 0301	VHITDA7480/-1	IC TDA7480 THOMSON	S	AF	AK
	IC 0302	VHITDA7480/-1	IC TDA7480 THOMSON	S	AF	AK
	IC 0304	VHIM5218L//-1	IC M5218L	S	AA	AD
	IC 0305	RH-IX1789BMZZ	CI MSP3410D-PP-C5 MICRONA	S	AS	BD
	IC 0401	RH-IX1602BMZZ	IC HEF4053 SMD	S	AA	AD
	IC 0502	VHIBA4558F/-1	IC BA4558F-E2 ROHM OP-AMP	S	AA	AC
	IC 0503	RH-IX1556BMZZ	IC BA10393 S0P8 SMD ROHM	S	AC	AD
	IC 0701	VHIPST529C2-1	IC PST529C2 MITSUMI	S	AD	AD
	IC 0702	RH-IX1646BMZZ	IC ST6203B SMD SGS-THOMSON	S	AF	AL
⚠	IC 0703	RH-FX0106BMZZ	OPTOCOUPLER M0C8106SR2V-M	S	AC	AD
⚠	IC 0704	RH-FX0106BMZZ	OPTOCOUPLER M0C8106SR2V-M	S	AC	AD
⚠	IC 0705	RH-FX0106BMZZ	OPTOCOUPLER M0C8106SR2V-M	S	AC	AD
	IC 0706	RH-IX1674BMZZ	IC KA431AZ SAMSUNG	S	AA	AD
	IC 0707	RH-IX1704BMZZ	IC L4978 THOMSON	S	AD	AK
	IC 0708	RH-FX0111BMZZ	OPTOCOUPLER TLP165J TOSHIBA	S	AB	AE
	IC 1001	RH-IX1686BMZZ	IC ST10R272L THOMSON	S	AK	AW
	IC 1002	CH-IX1708CJE0	EPROM+SOFT 70FW57E WITH K7270	S	AR	BC
	IC 1002	CH-IX1708CJE2	EPROM+SOFT 81FW57E WITH K7270	S	AR	BC
	IC 1002	CH-IX1708CJE7	EPROM+SOFT WITH K7270 DDP 3310B-E4	S	AR	BC
	IC 1002	CH-IX1708CJE5	EPROM+SOFT WITH K7295	S	AR	BC
	IC 1003	RH-IX1603BMZZ	NVM X24645S8 XICOR SMD	S	AS	AV
	IC 1004	RH-IX1603BMZZ	NVM X24645S8 XICOR SMD	S	AS	AV
	IC 1005	VHIPST529C2-1	IC PST529C2 MITSUMI	S	AD	AD
	IC 2401	RH-IX1709BMZZ	IC SDA5275-3MTXT NIVEL2,5	S	AT	BD
	IC 2402	RH-IX1656BMZZ	RAM D KM44C1000DT-6T SAMSUNG	S	AR	AY
			TRANSISTORS			
	Q 0201	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 0209	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0302	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0303	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0304	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 0305	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0306	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0403	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0404	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0405	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 0406	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 0408	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0501	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0502	RH-TX0201BMZZ	TRT KSA928A SAMGUNG	S	AA	AC
	Q 0503	RH-TX0172BMZZ	IRFR010TM SAMSUNG N	S	AD	AE
	Q 0505	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0506	RH-TX0151BMZZ	TRT 2SD2391Q SMD ROHM	S	AC	AD
	Q 0507	RH-TX0203BMZZ	TRT 2SB852 ROHM	S	AA	AB
	Q 0601	RH-TX0197BMZZ	TRT BU2525AX PHILIPS	S	AG	AP
	Q 0602	RH-TX0192BMZZ	TRT KSC2500 SAMSUNG	S	AB	AC
	Q 0603	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0604	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 0605	RH-TX0192BMZZ	TRT KSC2500 SAMSUNG	S	AB	AC
	Q 0606	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0701	RH-TX0198BMZZ	TRT S5F10N80A SAMSUNG	S	AM	AU
	Q 0702	RH-TX0182BMZZ	TRT 2PD602AR PHILIPS	S	AA	AB
	Q 0703	RH-TX0151BMZZ	TRT 2SD2391Q SMD ROHM	S	AC	AD
	Q 0708	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0709	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0710	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0711	RH-TX0106BMZZ	TRT BC547	S	AA	AB
	Q 0712	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 0714	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 0715	RH-TX0215BMZZ	MOSFET 2SK2715 ROHM	S	AA	AE
	Q 0717	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 1001	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 1002	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 1003	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 1004	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 1005	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 1006	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 1007	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 2401	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
			DIODES			
	D 0203	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0204	RH-DX0548BMZZ	DIODE VARICAP BBY40	S	AC	AE
	D 0205	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
	D 0301	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0302	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0303	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0304	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0305	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0401	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0402	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0403	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0404	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0405	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0406	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0407	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0408	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0409	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	D 0410	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 0411	RH-EX0546BMZZ	ZENER DIODE TZMC5V6 TFK SMD	S	AA	AA
	D 0412	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0413	RH-EX0584BMZZ	ZENER DIODE TZMBC6V2 TFK SMD 2%	S	AA	AA
	D 0414	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0415	RH-EX0547BMZZ	ZENER DIODE TZMC6V2 TFK SMD	S	AA	AA
	D 0416	RH-EX0547BMZZ	ZENER DIODE TZMC6V2 TFK SMD	S	AA	AA
	D 0417	RH-EX0547BMZZ	ZENER DIODE TZMC6V2 TFK SMD	S	AA	AA
	D 0419	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0420	RH-EX0546BMZZ	ZENER DIODE TZMC5V6 TFK SMD	S	AA	AA
	D 0421	RH-EX0544BMZZ	ZENER DIODE TZMC4V7 TFK SMD	S	AA	AA
	D 0422	RH-EX0419BMZZ	ZENER DIODE BZX79C15V 0,4W	S	AA	AB
	D 0502	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0503	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0504	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0506	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0507	RH-EX0554BMZZ	ZENER DIODE TZMC12 TFK SMD	S	AA	AA
	D 0508	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0509	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0510	RH-DX0505BMZZ	DIODE 1N4935	S	AB	AE
	D 0515	RH-EX0544BMZZ	ZENER DIODE TZMC4V7 TFK SMD	S	AA	AA
	D 0516	RH-EX0837BMZZ	ZENER DIODE BZT03C47 PHILIPS	S	AA	AD
	D 0601	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0605	RH-DX0585BMZZ	DIODE DMV32AF5 THOMSON	S	AH	AM
	D 0606	RH-DX0505BMZZ	DIODE 1N4935	S	AB	AE
	D 0608	RH-DX0505BMZZ	DIODE 1N4935	S	AB	AE
	D 0609	RH-DX0505BMZZ	DIODE 1N4935	S	AB	AE
	D 0610	RH-DX0519BMZZ	DIODE 1N5819 MOROROLA	S	AB	AD
	D 0611	RH-DX0519BMZZ	DIODE 1N5819 MOROROLA	S	AB	AD
	D 0612	RH-DX0519BMZZ	DIODE 1N5819 MOROROLA	S	AB	AD
	D 0613	RH-DX0506BMZZ	DIODE 1N4936	S	AB	AB
	D 0619	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0620	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0621	RH-DX0506BMZZ	DIODE 1N4936	S	AB	AB
	D 0622	VRD-RA2BE152J	RES 1,5KOHM 5% 1/8W	S	AA	AA
	D 0623	RH-EX0423BMZZ	ZENER DIODE BZX79C22V	S	AA	AB
	D 0701	RH-DX0555BMZZ	DIODE RF2005 FAGOR	S	AA	AB
	D 0702	RH-DX0555BMZZ	DIODE RF2005 FAGOR	S	AA	AB
	D 0703	RH-DX0555BMZZ	DIODE RF2005 FAGOR	S	AA	AB
	D 0704	RH-DX0555BMZZ	DIODE RF2005 FAGOR	S	AA	AB
	D 0706	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0707	RH-DX0502BMZZ	DIODE 1N4005	S	AB	AA
	D 0708	RH-DX0502BMZZ	DIODE 1N4005	S	AB	AA
	D 0710	RH-EX0545BMZZ	ZENER DIODE TZMC5V1 TFK SMD	S	AA	AA
	D 0711	RH-DX0539BMZZ	DIODE BYT52M TFK	S	AA	AC
	D 0712	RH-EX0419BMZZ	ZENER DIODE BZX79C15V 0,4W	S	AA	AB
	D 0713	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0714	RH-DX0605BMZZ	DIODE MBR340RL MOTOROLA	S	AA	AE
	D 0715	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0716	RH-EX0412BMZZ	ZENER DIODE BZX79C7V5	S	AA	AB
	D 0718	RH-DX0589BMZZ	DIODE MBR3100RL MOTOROLA	S	AC	AF
	D 0719	RH-DX0589BMZZ	DIODE MBR3100RL MOTOROLA	S	AC	AF
	D 0720	RH-DX0587BMZZ	DIODE MR826 PREFORM C6.3	S	AH	AP
	D 0721	RH-EX0550BMZZ	ZENER DIODE TZMC8V2 TFK SMD	S	AA	AA
	D 0722	RH-DX0590BMZZ	DIODE MBR1100RL MOTOROLA	S	AD	AE
	D 0724	RH-EX0538BMZZ	ZENER DIODE TZMC2V7 TFK SMD	S	AA	AA
	D 0725	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0726	RH-EX0554BMZZ	ZENER DIODE TZMC12 TFK SMD	S	AA	AA
	D 0727	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0728	RH-EX0545BMZZ	ZENER DIODE TZMC5V1 TFK SMD	S	AA	AA
	D 0729	RH-EX0568BMZZ	ZENER DIODE TZMC47 TFK SMD	S	AA	AA
	D 0730	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0731	RH-DX0502BMZZ	DIODE 1N4005	S	AB	AA
	D 0732	RH-EX0556BMZZ	ZENER DIODO TZMC15 TFK SMD	S	AA	AA
	D 0733	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 0734	RH-DX0502BMZZ	DIODE 1N4005	S	AB	AA
	D 1003	RH-DX0606BMZZ	DIODE BAS85 PHILIPS	S	AA	AB
	D 1004	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 1005	RH-EX0549BMZZ	ZENER DIODE TZMC7V5 TFK SMD	S	AA	AA
	D 1006	RH-EX0546BMZZ	ZENER DIODE TZMC5V6 TFK SMD	S	AA	AA
	D 1007	RH-EX0546BMZZ	ZENER DIODE TZMC5V6 TFK SMD	S	AA	AA
	D 1008	RH-EX0546BMZZ	ZENER DIODE TZMC5V6 TFK SMD	S	AA	AA
	D 1009	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
	D 2401	RH-EX0539BMZZ	ZENER DIODE TZMC3V0 TFK SMD	S	AA	AA
			PACKAGED CIRCUITS			
	POR0701	RMPTP0001BMZZ	PTC B59250-C1080-B70	S	AA	AD
	X 0301	RCRSB0203BMZZ	CRYSTAL 18,432 MHZ	S	AD	AG
	X 1002	RCRSB0200BMZZ	CRYSTAL 17,734 MHZ	S	AD	AG
	X 2401	RCRSB0214BMZZ	CRYSTAL 20.48 MHZ SEL	S	AD	AH
			COILS			
	L 0201	VP-DF120K0000	PEAK COIL 12UH 10%	S	AA	AA
	L 0202	VP-NM150KR63N	COIL 15UH SMD	S	AB	AC
	L 0203	VP-CF6R8K0000	PEAK COIL 6.8UH 10%	S	AA	AA
	L 0204	RCILP0229BMZZ	COIL SMD 610NH LQN1HR61J	S	AA	AD
	L 0205	RCILP0229BMZZ	COIL SMD 610NH LQN1HR61J	S	AA	AD
	L 0301	VP-DF100K0000	PEAK COIL 10UH 10%	S	AA	AA
	L 0315	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	L 0316	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	L 0350	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	L 0351	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	L 0352	RCILP0278BMZZ	COIL A823LY-680K TOKO	S	AA	AD
	L 0353	RCILP0278BMZZ	COIL A823LY-680K TOKO	S	AA	AD
	L 0501	RCILP0271BMZZ	COIL BC-400/K DIEMEN	S	AD	AG
	L 0502	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	L 0503	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	L 0601	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
	L 0603	RCILP0262BMZZ	COIL HR18008.00	S	AD	AG
	L 0604	RCILP0287BMZZ	COIL	S	AC	AG
	L 0605	RCILZ0718BMZZ	COIL HR13042-00 DIEMEN	S	AL	AD
	L 609A	VRN-VV3AB1R0J	MET FILM R 1 OHM 5% 1W	S	AA	AA
	L 0611	VP-CF220K0000	PEAK COIL 22UH 10%	S	AA	AA
	L 0612	VP-CF220K0000	PEAK COIL 22UH 10%	S	AA	AA
	L 0701	RCILF0108BMZZ	COIL 472839.00 THOMSON	S	AF	AL
	L 0705	RCILP0285BMZZ	COIL PCV1620-500K DIONIX	S	AB	AF
	L 2401	VP-DF3R3K0000	PEAK COIL 3,3UH 10%	S	AB	AB
	L 2402	VP-DF100K0000	PEAK COIL 10UH 10%	S	AA	AA
			CERAMIC FILTERS			
	CF 0202	RFILC0020CEZZ	FILTER SIF TRAP (TAPED)	S	AE	AE
	CF 0701	RFILC0121GEZZ	FILTER CST8.00MTW MURATA	S	AC	AD
	SF 0201	RFILC0278BMZZ	SAW FILTER K3953M SIEMENS	S	AK	AM
	SF 0202	RFILC0286BMZZ	FILTER K9356M SIEMENS	S	AC	AG
	SF 0203	RFILC0289BMZZ	SAW FILTER L9354M SIEMENS	S	AC	AK
			TRANSFORMERS			
⚠	T 0601	RTRNF2070BMZZ	FBT 47320-311 THOM 70FW57E	S	AQ	BA
⚠	T 0601	RTRNF2071BMZZ	FBT 66688-02 OREGA 81FW57E	S	AP	AZ
⚠	T 0701	RTRNZ0577BMZZ	TRANSFORMER 16:9 100HZ	S	AF	AQ
			CAPACITORS			
	C 0203	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0203	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0204	VCEAGA1HW225M	ELEC C 2,2UF 20% 50V	S	AA	AB
	C 0205	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
	C 0206	VCEAGA1HW225M	ELEC C 2,2UF 20% 50V	S	AA	AB
	C 0207	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0208	VCKYTV1HF223Z	CERAM C 22NF 50V 2125SMD	S	AA	AA
	C 0209	VCEAGA1CW107M	ELEC C 100UF 20% 16V	S	AA	AA
	C 0211	VCEAGA1HW106M	ELEC C 10UF 20% 50V	S	AA	AA
	C 0212	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	C 0213	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	C 0214	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0215	VCEAGA1AW477M	ELEC C 470UF 20% 10V	S	AA	AB
	C 0216	VCCCTV1HH270J	CERAM C 27PF 50V 2125SMD	S	AA	AA
	C 0217	VCCCTV1HH221J	CERAM C 220PF 50V 2125SMD	S	AA	AA
	C 0218	VCEAGA1AW107M	ELEC C 100UF 20% 10V	S	AA	AB
	C 0219	VCEAGA1HW105M	ELEC C 1UF 20% 50V	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	C 0530	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0533	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0534	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 0535	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
	C 0601	RC-FZ0168BMZZ	ELEC 2222 375 44103 70FW57E	S	AA	AD
	C 0601	RC-FZ0170BMZZ	CAP 2222 375 44123 81FW57E	S	AA	AE
	C 0606	VCKYTV1HB683K	CERAM C 68NF 50V 2125SMD	S	AA	AA
	C 0607	VCEAGA1AW337M	ELEC C 330UF 20% 10V	S	AA	AA
	C 0610	RC-FZ0162BMZZ	CAPACITOR B32632 27NF 630V	S	AA	AA
	C 0611	RC-FZ7155BMNJ	PP FILM C 1,5MF 5% 400V	S	AB	AF
	C 0613	RC-FZ7474BMNJ	FILM PP C 470NF 5% 400V 70FW57E	S	AC	AH
	C 0613	RC-FZ7684BMNJ	FILM PP C 680NF 5% 400V 81FW57E	S	AE	AH
	C 0615	VCEAGA1EW477M	ELEC C 470UF 20% 25V	S	AA	AB
	C 0616	VCEAGA1VW477M	ELEC C 470UF 20% 35V	S	AA	AC
	C 0618	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
	C 0619	VCEA4A2CN225M	C UVZ2C2R2MEH1TA NICHICON	S	AA	AB
	C 0620	VCEA4A2CN225M	C UVZ2C2R2MEH1TA NICHICON	S	AA	AB
	C 0631	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
	C 0633	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 0635	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 0637	VCKYPA2HB222K	CERAM C 2,2NF 10% 500V	S	AA	AA
	C 0638	VCKYPA2HB222K	CERAM C 2,2NF 10% 500V	S	AA	AA
	C 0639	VCCCTV1HH391J	CERAM C 390PF 50V 2125SMD	S	AA	AA
	C 0640	VCKYTV1HB222K	CERAM C 2,2NF 50V 2125SMD	S	AA	AA
	C 0644	VCEAGA1CW227M	ELEC C 220UF 20% 16V	S	AA	AA
	C 0645	VCCCTV1HH151J	CERAM C 150PF 50V 2125SMD	S	AA	AA
⚠	C 0701	RC-FZ0070BMZZ	PLAST C MET 0,1uF 250V B81121-C-B125	S	AD	AD
	C 0702	RC-FZ0173BMZZ	C.POL 47NF 400V PHIL.365	S	AN	AZ
	C 0703	RC-KZ0165BMZZ	CAPACITOR CER DE0905-979E332ZAC250	S	AA	AB
	C 0704	RC-KZ0165BMZZ	CAPACITOR CER DE0905-979E332ZAC250	S	AA	AB
	C 0705	RC-EZ0119BMZZ	ELEC 220uF 385V B43303-H227-M SIEMENS	S	AF	AR
	C 0706	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
	C 0707	VCEAGA1CW107M	ELEC C 100UF 20% 16V	S	AA	AA
	C 0710	RC-FZ0156BMZZ	C B32529-B6473K SIEMENS	S	AD	AE
	C 0711	RC-KZ0035CEZZ	CERAM C 220PF 2KV	S	AA	AC
	C 0712	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
	C 0713	RC-FZ4104BMNJ	POL FILM C 100nF 50V 5% ECQ-V PANAS	S	AA	AA
	C 0714	RC-FZ4823BMNJ	POL FILM C 82nF 50V 5% ECQ-B PANAS	S	AA	AA
	C 0715	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
	C 0716	VCKYTV1HB332K	CERAM C 3,3NF 50V 2125SMD	S	AA	AA
	C 0717	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 0718	VCEAGA1EW108M	ELEC C 1000UF 20% 25V	S	AD	AD
	C 0719	VCEAGA1EW108M	ELEC C 1000UF 20% 25V	S	AD	AD
	C 0720	RC-EZ0258CEZZ	ELEC C 100MF 200V	S	AC	AK
	C 0721	VCEAHA1VN477M	ELEC 470UF 20% 35V 105ºC	S	AA	AD
	C 0722	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0723	VCEAGA1AW228M	ELEC C 2200UF 20% 10V	S	AA	AC
	C 0724	VCEAGA1CW227M	ELEC C 220UF 20% 16V	S	AA	AA
	C 0725	VCKYTV1HB472K	CERAM C 4,7NF 50V 2125SMD	S	AA	AA
	C 0728	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0730	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0731	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0732	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0733	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0735	VCKYTV1HB272K	CERAM C 2,7NF 50V 2125SMD	S	AA	AB
	C 0737	VCKYTV1CF105Z	CERAM C 1UF 16V 2125SMD	S	AA	AA
	C 0738	VCCCTV1HH560J	CERAM C 56PF 50V 2125SMD	S	AA	AA
	C 0739	VCEAGA1CW227M	ELEC C 220UF 20% 16V	S	AA	AA
	C 0740	VCKYTV1HF223Z	CERAM C 22NF 50V 2125SMD	S	AA	AA
	C 0741	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0742	VCKYTV1HB683K	CERAM C 68NF 50V 2125SMD	S	AA	AA
	C 0743	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0746	RC-FZ0070BMZZ	PLAST C MET 0,1uF 250V B81121-C-B125	S	AD	AD
⚠	C 0770	RC-KZ0156CEZZ	CERAM C 3300PF 4KV	S	AB	AD
	C 0821	VCEAGA1HW225M	ELEC C 2,2UF 20% 50V	S	AA	AB
	C 1001	VCEAGA0JW477M	ELEC C 470UF 20% 6,3V	S	AA	AA
	C 1002	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1005	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1014	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	C 1017	VCKYTV1HF333Z	CERAM C 33NF 50V 2125SMD	S	AA	AA
	C 1018	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1019	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 1020	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 1021	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1022	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1026	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 1027	VCEAGA1CW476M	ELEC C 47UF 20% 16V	S	AA	AA
	C 1028	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1030	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
	C 1031	VCKZPA1HF103Z	CERAM C 10NF % 50V	S	AA	AA
	C 1032	VCEAGA1HW225M	ELEC C 2,2UF 20% 50V	S	AA	AB
	C 1033	VCKYTV1HF683Z	CERAM C 68NF 50V 2125SMD	S	AA	AA
	C 2401	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 2402	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 2403	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2404	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2405	VCKYTV1EF224Z	CERAM C 220NF 25V 2125SMD	S	AA	AA
	C 2406	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2407	VCKYTV1EF224Z	CERAM C 220NF 25V 2125SMD	S	AA	AA
	C 2408	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2409	VCCCPA1HH470J	CERAM C 47PF 5% 50V	S	AA	AA
			RESISTORS			
	R 0203	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0204	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0205	VRS-TV1JD391J	2125 390 OHM 5% 1/10W SMD	S	AA	AA
	R 0208	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0209	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
	R 0210	VRS-TV1JD152J	2125 1.5KOHM 5% 1/10W SMD	S	AA	AA
	R 0211	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0216	VRS-TV1JD151J	2125 150 OHM 5% 1/10W SMD	S	AA	AA
	R 0217	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
	R 0219	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0220	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0226	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 0229	VRD-RA2HD822J	RES 8,2KOHM 5% 1/2W	S	AA	AA
	R 0230	VRD-RA2HD822J	RES 8,2KOHM 5% 1/2W	S	AA	AA
	R 0231	VRD-RA2HD822J	RES 8,2KOHM 5% 1/2W	S	AA	AA
	R 0232	VRD-RA2BE561J	RES 560 OHM 5% 1/8W	S	AA	AA
	R 0233	VRD-RA2BE561J	RES 560 OHM 5% 1/8W	S	AA	AA
	R 0234	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 0235	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
	R 0236	VRS-TV1JD562J	2125 5,6KOHM 5% 1/10W SMD	S	AA	AA
	R 0237	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
	R 0240	VRS-TV1JD224J	2125 220KOHM 5% 1/10W SMD	S	AA	AA
	R 0241	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0242	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 0243	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 0244	VRS-TV1JD333J	2125 33KOHM 5% 1/10W SMD	S	AA	AA
	R 0245	VRS-TV1JD152J	2125 1.5KOHM 5% 1/10W SMD	S	AA	AA
	R 0246	VRS-TV1JD224J	2125 220KOHM 5% 1/10W SMD	S	AA	AA
	R 0247	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0248	VRD-RA2HD221J	RES 220 OHM 5% 1/2W	S	AA	AA
	R 0248	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 0251	VRS-TV1JD683J	2125 68KOHM 5% 1/10W SMD	S	AA	AA
	R 0252	VRS-TV1JD183J	2125 18KOHM 5% 1/10W SMD	S	AA	AA
	R 0257	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
	R 0259	VRD-RA2BE472J	RES 4,7KOHM 5% 1/8W	S	AA	AA
	R 0301	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0302	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0303	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 0304	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 0306	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 0307	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 0308	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 0309	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
	R 0310	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0311	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0312	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	C 0530	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0533	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0534	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 0535	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
	C 0601	RC-FZ0168BMZZ	ELEC 2222 375 44103 70FW57E	S	AA	AD
	C 0601	RC-FZ0170BMZZ	CAP 2222 375 44123 81FW57E	S	AA	AE
	C 0606	VCKYTV1HB683K	CERAM C 68NF 50V 2125SMD	S	AA	AA
	C 0607	VCEAGA1AW337M	ELEC C 330UF 20% 10V	S	AA	AA
	C 0610	RC-FZ0162BMZZ	CAPACITOR B32632 27NF 630V	S	AA	AA
	C 0611	RC-FZ7155BMNJ	PP FILM C 1,5MF 5% 400V	S	AB	AF
	C 0613	RC-FZ7474BMNJ	FILM PP C 470NF 5% 400V 70FW57E	S	AC	AH
	C 0613	RC-FZ7684BMNJ	FILM PP C 680NF 5% 400V 81FW57E	S	AE	AH
	C 0615	VCEAGA1EW477M	ELEC C 470UF 20% 25V	S	AA	AB
	C 0616	VCEAGA1VW477M	ELEC C 470UF 20% 35V	S	AA	AC
	C 0618	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
	C 0619	VCEA4A2CN225M	C UVZ2C2R2MEH1TA NICHICON	S	AA	AB
	C 0620	VCEA4A2CN225M	C UVZ2C2R2MEH1TA NICHICON	S	AA	AB
	C 0631	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
	C 0633	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 0635	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 0637	VCKYPA2HB222K	CERAM C 2,2NF 10% 500V	S	AA	AA
	C 0638	VCKYPA2HB222K	CERAM C 2,2NF 10% 500V	S	AA	AA
	C 0639	VCCCTV1HH391J	CERAM C 390PF 50V 2125SMD	S	AA	AA
	C 0640	VCKYTV1HB222K	CERAM C 2,2NF 50V 2125SMD	S	AA	AA
	C 0644	VCEAGA1CW227M	ELEC C 220UF 20% 16V	S	AA	AA
	C 0645	VCCCTV1HH151J	CERAM C 150PF 50V 2125SMD	S	AA	AA
⚠	C 0701	RC-FZ0070BMZZ	PLAST C MET 0,1uF 250V B81121-C-B125	S	AD	AD
	C 0702	RC-FZ0173BMZZ	C.POL 47NF 400V PHIL.365	S	AN	AZ
	C 0703	RC-KZ0165BMZZ	CAPACITOR CER DE0905-979E332ZAC250	S	AA	AB
	C 0704	RC-KZ0165BMZZ	CAPACITOR CER DE0905-979E332ZAC250	S	AA	AB
	C 0705	RC-EZ0119BMZZ	ELEC 220uF 385V B43303-H227-M SIEMENS	S	AF	AR
	C 0706	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
	C 0707	VCEAGA1CW107M	ELEC C 100UF 20% 16V	S	AA	AA
	C 0710	RC-FZ0156BMZZ	C B32529-B6473K SIEMENS	S	AD	AE
	C 0711	RC-KZ0035CEZZ	CERAM C 220PF 2KV	S	AA	AC
	C 0712	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
	C 0713	RC-FZ4104BMNJ	POL FILM C 100nF 50V 5% ECQ-V PANAS	S	AA	AA
	C 0714	RC-FZ4823BMNJ	POL FILM C 82nF 50V 5% ECQ-B PANAS	S	AA	AA
	C 0715	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
	C 0716	VCKYTV1HB332K	CERAM C 3,3NF 50V 2125SMD	S	AA	AA
	C 0717	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 0718	VCEAGA1EW108M	ELEC C 1000UF 20% 25V	S	AD	AD
	C 0719	VCEAGA1EW108M	ELEC C 1000UF 20% 25V	S	AD	AD
	C 0720	RC-EZ0258CEZZ	ELEC C 100MF 200V	S	AC	AK
	C 0721	VCEAHA1VN477M	ELEC 470UF 20% 35V 105ºC	S	AA	AD
	C 0722	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0723	VCEAGA1AW228M	ELEC C 2200UF 20% 10V	S	AA	AC
	C 0724	VCEAGA1CW227M	ELEC C 220UF 20% 16V	S	AA	AA
	C 0725	VCKYTV1HB472K	CERAM C 4,7NF 50V 2125SMD	S	AA	AA
	C 0728	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0730	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0731	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0732	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0733	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0735	VCKYTV1HB272K	CERAM C 2,7NF 50V 2125SMD	S	AA	AB
	C 0737	VCKYTV1CF105Z	CERAM C 1UF 16V 2125SMD	S	AA	AA
	C 0738	VCCCTV1HH560J	CERAM C 56PF 50V 2125SMD	S	AA	AA
	C 0739	VCEAGA1CW227M	ELEC C 220UF 20% 16V	S	AA	AA
	C 0740	VCKYTV1HF223Z	CERAM C 22NF 50V 2125SMD	S	AA	AA
	C 0741	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0742	VCKYTV1HB683K	CERAM C 68NF 50V 2125SMD	S	AA	AA
	C 0743	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 0746	RC-FZ0070BMZZ	PLAST C MET 0,1uF 250V B81121-C-B125	S	AD	AD
⚠	C 0770	RC-KZ0156CEZZ	CERAM C 3300PF 4KV	S	AB	AD
	C 0821	VCEAGA1HW225M	ELEC C 2,2UF 20% 50V	S	AA	AB
	C 1001	VCEAGA0JW477M	ELEC C 470UF 20% 6,3V	S	AA	AA
	C 1002	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1005	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1014	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	C 1017	VCKYTV1HF333Z	CERAM C 33NF 50V 2125SMD	S	AA	AA
	C 1018	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1019	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 1020	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 1021	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1022	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1026	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 1027	VCEAGA1CW476M	ELEC C 47UF 20% 16V	S	AA	AA
	C 1028	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1030	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
	C 1031	VCKZPA1HF103Z	CERAM C 10NF % 50V	S	AA	AA
	C 1032	VCEAGA1HW225M	ELEC C 2,2UF 20% 50V	S	AA	AB
	C 1033	VCKYTV1HF683Z	CERAM C 68NF 50V 2125SMD	S	AA	AA
	C 2401	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 2402	VCCCTV1HH220J	CERAM C 22PF 50V 2125SMD	S	AA	AA
	C 2403	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2404	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2405	VCKYTV1EF224Z	CERAM C 220NF 25V 2125SMD	S	AA	AA
	C 2406	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2407	VCKYTV1EF224Z	CERAM C 220NF 25V 2125SMD	S	AA	AA
	C 2408	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 2409	VCCCPA1HH470J	CERAM C 47PF 5% 50V	S	AA	AA
			RESISTORS			
	R 0203	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0204	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0205	VRS-TV1JD391J	2125 390 OHM 5% 1/10W SMD	S	AA	AA
	R 0208	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0209	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
	R 0210	VRS-TV1JD152J	2125 1.5KOHM 5% 1/10W SMD	S	AA	AA
	R 0211	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0216	VRS-TV1JD151J	2125 150 OHM 5% 1/10W SMD	S	AA	AA
	R 0217	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
	R 0219	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0220	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0226	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 0229	VRD-RA2HD822J	RES 8,2KOHM 5% 1/2W	S	AA	AA
	R 0230	VRD-RA2HD822J	RES 8,2KOHM 5% 1/2W	S	AA	AA
	R 0231	VRD-RA2HD822J	RES 8,2KOHM 5% 1/2W	S	AA	AA
	R 0232	VRD-RA2BE561J	RES 560 OHM 5% 1/8W	S	AA	AA
	R 0233	VRD-RA2BE561J	RES 560 OHM 5% 1/8W	S	AA	AA
	R 0234	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 0235	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
	R 0236	VRS-TV1JD562J	2125 5,6KOHM 5% 1/10W SMD	S	AA	AA
	R 0237	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
	R 0240	VRS-TV1JD224J	2125 220KOHM 5% 1/10W SMD	S	AA	AA
	R 0241	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0242	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 0243	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 0244	VRS-TV1JD333J	2125 33KOHM 5% 1/10W SMD	S	AA	AA
	R 0245	VRS-TV1JD152J	2125 1.5KOHM 5% 1/10W SMD	S	AA	AA
	R 0246	VRS-TV1JD224J	2125 220KOHM 5% 1/10W SMD	S	AA	AA
	R 0247	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0248	VRD-RA2HD221J	RES 220 OHM 5% 1/2W	S	AA	AA
	R 0248	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 0251	VRS-TV1JD683J	2125 68KOHM 5% 1/10W SMD	S	AA	AA
	R 0252	VRS-TV1JD183J	2125 18KOHM 5% 1/10W SMD	S	AA	AA
	R 0257	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
	R 0259	VRD-RA2BE472J	RES 4,7KOHM 5% 1/8W	S	AA	AA
	R 0301	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0302	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0303	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 0304	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 0306	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 0307	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 0308	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 0309	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
	R 0310	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0311	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 0312	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
R 0313	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0314	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0315	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
R 0318	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0319	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0320	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0321	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0322	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0323	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0350	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0351	VRD-RA2BE273J	RES 27KOHM 5% 1/8W	S	AA	AA
R 0352	VRS-TV1JD123J	2125 12KOHM 5% 1/10W SMD	S	AA	AA
R 0353	VRS-TV1JD151J	2125 150 OHM 5% 1/10W SMD	S	AA	AA
R 0354	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0355	VRS-TV1JD273J	2125 27KOHM 5% 1/10W SMD	S	AA	AA
R 0356	VRS-TV1JD123J	2125 12KOHM 5% 1/10W SMD	S	AA	AA
R 0357	VRS-TV1JD151J	2125 150 OHM 5% 1/10W SMD	S	AA	AA
R 0358	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0359	VRD-RA2BE104J	RES 100KOHM 5% 1/8W	S	AA	AA
R 0360	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0361	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0362	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
R 0363	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
R 0372	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0373	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0374	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
R 0375	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
R 0376	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
R 0401	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0402	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 0403	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0404	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0405	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0406	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0407	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0408	VRD-RA2EE750J	RES 75 OHM 5% 1/4W	S	AA	AA
R 0409	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 0410	VRS-TV1JD223F	2125 22KOHM 1% 1/10W SMD	S	AA	AA
R 0412	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0413	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0414	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0415	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0416	VRS-TV1JD223F	2125 22KOHM 1% 1/10W SMD	S	AA	AA
R 0418	VRD-RA2HD680J	RES 68 OHM 5% 1/2W	S	AA	AA
R 0419	VRD-RA2EE750J	RES 75 OHM 5% 1/4W	S	AA	AA
R 0420	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
R 0421	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0422	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0423	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0424	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0425	VRD-RA2EE750J	RES 75 OHM 5% 1/4W	S	AA	AA
R 0426	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0427	VRS-TV1JD820J	2125 82 OHM 5% 1/10W SMD	S	AA	AA
R 0428	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0429	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0430	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0431	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0432	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0433	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0434	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0435	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0436	RR-XZ0112BMZZ	FUS RES 10R TAP 5% 1/3W	S	AA	AB
R 0437	VRS-TV1JD471J	2125 470 OHM 5% 1/10W SMD	S	AA	AA
R 0445	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0447	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 0448	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 0450	VRS-TV1JD220J	2125 22 OHM 5% 1/10W SMD	S	AA	AA
R 0451	VRD-RA2HD221J	RES 220 OHM 5% 1/2W	S	AA	AA
R 0452	VRS-TV1JD223F	2125 22KOHM 1% 1/10W SMD	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
R 0453	VRS-TV1JD183F	2125 18KOHM 1% 1/10W SMD	S	AA	AA
R 0454	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
R 0455	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
R 0456	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
R 0458	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0459	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0460	VRS-TV1JD183F	2125 18KOHM 1% 1/10W SMD	S	AA	AA
R 0461	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0462	VRS-TV1JD183F	2125 18KOHM 1% 1/10W SMD	S	AA	AA
R 0463	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 0464	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
R 0465	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0466	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0467	VRS-TV1JD333J	2125 33KOHM 5% 1/10W SMD	S	AA	AA
R 0468	VRD-RA2BE330J	RES 33 OHM 5% 1/8W	S	AA	AA
R 0501	VRD-RA2HD151J	RES 150 OHM 5% 1/2W	S	AA	AA
R 0502	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 0503	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
R 0504	VRS-TV1JD393J	2125 39KOHM 5% 1/10W SMD	S	AA	AA
R 0505	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 0506	VRS-TQ2BD121J	OX RE 120 OHM 5% 1/8W SMD	S	AA	AA
R 0507	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
R 0508	VRD-RA2BE681J	RES 680 OHM 5% 1/8W	S	AA	AA
R 0509	VRS-TV1JD393J	2125 39KOHM 5% 1/10W SMD	S	AA	AA
R 0510	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
R 0511	VRS-TV1JD151J	2125 150 OHM 5% 1/10W SMD	S	AA	AA
R 0512	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 0513	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0514	VRS-TV1JD391J	2125 390 OHM 5% 1/10W SMD	S	AA	AA
R 0515	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
R 0516	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0517	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
R 0518	VRN-VV3DB2R2J	MET FILM R 2.2 OHM 5% 2W	S	AA	AA
R 0519	VRD-RA2HD104J	RES 100KOHM 5% 1/2W	S	AA	AA
R 0521	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0522	VRS-TV1JD331J	2125 330 OHM 5% 1/10W SMD	S	AA	AA
R 0524	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0525	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 0526	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
R 0527	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0528	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0530	RR-XZ0200BMZZ	FUS RES 1R0 TAP 5% 1/2W	S	AA	AB
R 0532	VRS-TV1JD682J	2125 6.8KOHM 5% 1/10W SMD	S	AA	AA
R 0533	VRD-RA2EE821J	RES 820 OHM 5% 1/4W	S	AA	AA
R 0534	VRD-RA2BE273J	RES 27KOHM 5% 1/8W	S	AA	AA
R 0535	VRS-TV1JD682J	2125 6.8KOHM 5% 1/10W SMD	S	AA	AA
R 0536	VRS-LU3LB561J	SET MET OX R 560 OHM 5% 3W LW 70FW57	S	AA	AB
R 0536	VRS-LU3LB331J	SET MET OX R330 OHM 5%3W LW 81FW57E	S	AA	AB
R 0537	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
R 0538	VRS-TV1JD273J	2125 27KOHM 5% 1/10W SMD	S	AA	AA
R 0539	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
R 0540	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
R 0544	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 0545	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 0547	VRS-TV1JD392J	2125 3.9KOHM 5% 1/10W SMD	S	AA	AA
R 0548	VRS-TV1JD682J	2125 6.8KOHM 5% 1/10W SMD	S	AA	AA
R 0549	VRS-TV1JD273J	2125 27KOHM 5% 1/10W SMD	S	AA	AA
R 0552	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
R 0553	RR-XZ0101BMZZ	FUS RES 1R2 TAP 5% 1/3W	S	AA	AB
R 0603	VRD-RA2BE331J	RES 330 OHM 5% 1/8W	S	AA	AA
R 0604	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
R 0604	VRN-VV3ABR33J	MET FILM R .33 OHM 5% 1W	S	AA	AA
R 0605	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 0606	VRS-VV3AB102J	MET OX RES 1KOHM 5% 1W	S	AA	AA
R 0607	VRS-TV1JD682J	2125 6.8KOHM 5% 1/10W SMD	S	AA	AA
R 0608	VRD-RA2EE330J	RES 33 OHM 5% 1/4W	S	AA	AA
R 0610	RR-XZ0200BMZZ	FUS RES 1R0 TAP 5% 1/2W	S	AA	AB
R 0611	VRS-VV3DB561J	MET OX RES 560 OHM 5% 2W	S	AA	AA
R 0613	VRS-VV3LB332J	SET MET OX R 3,3KOHM 5% 3W LW	S	AA	AB

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	R 0614	VRD-RA2HD103J	RES 10KOHM 5% 1/2W	S	AA	AA
	R 0615	VRD-RA2BE561J	RES 560 OHM 5% 1/8W	S	AA	AA
	R 0616	VRN-VV3DBR56J	MET FILM R .56 OHM 5% 2W	S	AA	AB
	R 0617	RR-XZ0204BMZZ	FUS RES 2R2 TAP 5% 1/2W	S	AA	AB
	R 619A	VRS-VV3DB561J	MET OX RES 560 OHM 5% 2W	S	AA	AA
	R 619B	VRS-VV3DB561J	MET OX RES 560 OHM 5% 2W	S	AA	AA
	R 0623	VRN-VV3LBR56J	MET FILM R 0,56 OHM 5% 3W	S	AA	AB
	R 0625	VRS-TQ2BD181J	OX RE 180 OHM 5% 1/8W SMD	S	AA	AA
	R 0627	VRS-TQ2BD181J	OX RE 180 OHM 5% 1/8W SMD	S	AA	AA
	R 0628	VRD-RA2EE330J	RES 33 OHM 5% 1/4W	S	AA	AA
	R 0634	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
	R 0641	VRD-RA2HD470J	RES 47 OHM 5% 1/2W	S	AA	AA
	R 0646	VRS-TV1JD564J	2125 560KOHM 5% 1/10W SMD	S	AA	AA
	R 0647	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 0703	VRD-RA2HD154J	RES 150KOHM 5% 1/2W	S	AA	AA
	R 0706	VRS-TV1JD203J	2125 20KOHM 5% 1/10W SMD	S	AA	AA
	R 0707	VRS-TV1JD912J	2125 9.1KOHM 5% 1/10W SMD	S	AA	AA
	R 0708	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0711	VRS-TV1JD182J	2125 1,8KOHM 5% 1/10W SMD	S	AA	AA
	R 0712	VRS-TV1JD561J	2125 560 OHM 5% 1/10W SMD	S	AA	AA
	R 0713	VRC-MA2HG564J	SOLID R 560KOHM 5% 1/2W	S	AA	AA
	R 0714	VRC-MA2HG564J	SOLID R 560KOHM 5% 1/2W	S	AA	AA
	R 0715	VRW-KS3HC473J	WOUND RES 47KOHM 5% 5W	S	AA	AE
	R 0716	VRN-VV3DBR18K	MET FILM R .18 OHM 10% 2W	S	AA	AB
	R 0717	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
	R 0718	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
	R 0719	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
	R 0720	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 0721	VRD-RA2HD154J	RES 150KOHM 5% 1/2W	S	AA	AA
	R 0722	VRS-TV1JD330J	2125 33 OHM 5% 1/10W SMD	S	AA	AA
	R 0723	VRS-VV3AB271J	MET OX RES 270 OHM 5% 1W	S	AA	AA
	R 0724	VRS-TQ2BD271J	OX RE 270 OHM 5% 1/8W SMD	S	AA	AA
	R 0727	VRD-RA2HD181J	RES 180 OHM 5% 1/2W	S	AA	AA
	R 0728	VRD-RA2HD181J	RES 180 OHM 5% 1/2W	S	AA	AA
	R 0730	VRS-VV3DB151J	MET OX RES 150 OHM 5% 2W	S	AA	AA
	R 0733	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0735	VRS-TV1JD474J	2125 470KOHM 5% 1/10W SMD	S	AA	AA
	R 0736	VRS-TV1JD474J	2125 470KOHM 5% 1/10W SMD	S	AA	AA
	R 0737	VRS-TV1JD184J	2125 180KOHM 5% 1/10W SMD	S	AA	AA
	R 0738	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0739	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0740	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
⚠	R 0741	VRC-UA2HG825K	SOLID R 8,2MOHM 10% 1/2W	S	AA	AA
⚠	R 0742	VRC-UA2HG825K	SOLID R 8,2MOHM 10% 1/2W	S	AA	AA
	R 0743	VRS-TQ2BD473F	OX RE 47KOHM 1% 1/8W	S	AA	AA
	R 0744	VRS-TQ2BD473F	OX RE 47KOHM 1% 1/8W	S	AA	AA
	R 0745	VRS-TV1JD182F	2125 1,8KOHM 1% 1/10W SMD	S	AA	AA
	R 0746	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD 70FW57E	S	AA	AA
	R 0746	VRS-TV1JD183J	2125 18KOHM 5% 1/10W SMD 81FW57E	S	AA	AA
	R 0747	VRS-TV1JD272J	2125 2,7KOHM 5% 1/10W SMD	S	AA	AA
	R 0748	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 0750	VRS-TV1JD105J	2125 1MOHM 5% 1/10W SMD	S	AA	AA
	R 0751	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 0754	VRS-TV1JD2R7J	2125 2,7 OHM 5% 1/10W SMD	S	AA	AA
	R 0755	VRS-TV1JD391J	2125 390 OHM 5% 1/10W SMD	S	AA	AA
	R 0758	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 0762	VRS-TQ2BD221J	OX RE 220 OHM 5% 1/8W SMD	S	AA	AA
	R 0763	RR-XZ0224BMZZ	FUS RES 100R TAP 5% 1/2W	S	AA	AB
	R 0765	VRS-TQ2BD101J	OX RE 100 0HM 5% 1/8W SMD	S	AA	AA
	R 0766	VRS-TQ2BD101J	OX RE 100 0HM 5% 1/8W SMD	S	AA	AA
	R 0767	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 0768	VRS-TQ2BD221J	OX RE 220 OHM 5% 1/8W SMD	S	AA	AA
	R 0769	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
	R 0770	RR-XZ0229BMZZ	FUS RES 270R TAP 5% 1/2W	S	AA	AA
	R 0771	VRS-VV3AB474J	MET OX RES 470KOHM 5% 1W	S	AA	AA
	R 0774	VRS-TQ2BD474J	OX RE 470KOHM 5% 1/8W SMD	S	AA	AA
	R 0775	VRS-TQ2BD474J	OX RE 470KOHM 5% 1/8W SMD	S	AA	AA
	R 0776	VRS-TV1JD823J	2125 82KOHM 5% 1/10W SMD	S	AA	AA
	R 0777	VRS-TV1JD470J	2125 47 OHM 5% 1/10W SMD	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	R 0787	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 0788	VRS-TV1JD183J	2125 18KOHM 5% 1/10W SMD	S	AA	AA
	R 0789	VRS-TV1JD183J	2125 18KOHM 5% 1/10W SMD	S	AA	AA
	R 0790	VRD-RA2BE183J	RES 18KOHM 5% 1/8W	S	AA	AA
	R 0791	VRD-RA2BE183J	RES 18KOHM 5% 1/8W	S	AA	AA
	R 0792	VRD-RA2BE682J	RES 6,8KOHM 5% 1/8W	S	AA	AA
	R 1001	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
	R 1002	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
	R 1003	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
	R 1004	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
	R 1005	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1008	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
	R 1017	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
	R 1018	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 1019	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
	R 1020	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
	R 1021	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1022	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 1023	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
	R 1024	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
	R 1025	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
	R 1026	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
	R 1027	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
	R 1028	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 1029	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1030	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1031	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1032	VRS-TV1JD273J	2125 27KOHM 5% 1/10W SMD	S	AA	AA
	R 1033	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 1035	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1036	VRD-RA2BE472J	RES 4,7KOHM 5% 1/8W	S	AA	AA
	R 1037	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1038	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 1040	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 1041	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1042	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
	R 1043	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
	R 1044	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 1045	VRS-TV1JD822J	2125 8,2KOHM 5% 1/10W SMD	S	AA	AA
	R 1046	VRS-TV1JD182J	2125 1,8KOHM 5% 1/10W SMD	S	AA	AA
	R 1047	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
	R 1048	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
	R 1049	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 1050	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
	R 1051	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
	R 1052	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1053	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 1054	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 1055	VRD-RA2BE474J	RES 470KOHM 5% 1/8W	S	AA	AA
	R 1056	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 1057	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
	R 1058	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 1059	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 1060	VRD-RA2BE123J	RES 12KOHM 5% 1/8W	S	AA	AA
	R 1061	VRD-RA2BE472J	RES 4,7KOHM 5% 1/8W	S	AA	AA
	R 2401	VRS-TV1JD471J	2125 470 OHM 5% 1/10W SMD	S	AA	AA
	R 2402	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 2403	VRS-TV1JD152J	2125 1.5KOHM 5% 1/10W SMD	S	AA	AA
	R 2404	VRS-TV1JD560J	2125 56 OHM 5% 1/10W SMD	S	AA	AA
	R 2405	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
	R 2406	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
	R 2407	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
	R 2408	VRS-TV1JD332J	2125 3.3KOHM 5% 1/10W SMD	S	AA	AA
	R 2409	VRS-TV1JD271J	2125 270 OHM 5% 1/10W SMD	S	AA	AA
	R 2410	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 2411	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 2412	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
			MISCELLANEOUS PARTS			

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
		RMPTB0002BMV0	RESISTOR+FERRITE SET 0.33 OHM 5% 1W	S	AA	AC
	(AA)	QCNCM0672FCZZ	CONN B2P3-VH JST	S	AA	AA
	(CC)	QPLGN0241CEZZ	PLUG	S	AA	AA
	(CN1)	QSOCZ2109BMZZ	TWIN SCART JR21A13 CONECT	S	AG	AK
	(CN2)	QSOCZ2107BMZZ	SOCKET	S	AF	AE
	(FV)	QPLGN0241CEZZ	PLUG	S	AA	AA
	(G)0000	QPLGN0207CEZZ	PLUG	S	AA	AA
	(H)	QPLGN0541CEZZ	PLUG	S	AA	AA
	(HD)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(JL14)	QCNW-2736BMZZ	WIRE 1 WAY	S	AB	AF
	(L2)	QTIPM0017CEFM	TIP	S	AA	AA
	(MO)	QPLGN0441CEZZ	PLUG 4PIN	S	AA	AA
	(OPC)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(RC)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(RG)	QPLGN0441CEZZ	PLUG 4PIN	S	AA	AA
	(RT)	QPLGN0241CEZZ	PLUG	S	AA	AA
	(SB)	QSOCN0685CEZZ	SOCKET	S	AA	AC
	(SP)	QPLGN0441CEZZ	PLUG 4PIN	S	AA	AA
	(SS)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(ST)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(SW1)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(SW2)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(VS)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(YA)	QSOCN1285CEZZ	SOCKET	S	AA	AD
	(YB)	QSOCN1285CEZZ	SOCKET	S	AA	AD
	(YC)	QSOCN1285CEZZ	SOCKET	S	AA	AD
	FB 0001	RCORF0002BMZZ	FERRITE CORE TFC-16816EX	S	AF	AK
	FB 0301	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
	FB 0302	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
	FB 0303	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
	FB 0501	RBLN-0020CEZZ	BALUNE	S	AA	AB
	FB 0701	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
	FB 0702	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
	FB 0703	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
	FB 0705	RBLN-0020CEZZ	BALUNE	S	AA	AB
	FB 1001	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
	FB 1002	RBLN-0037CEZZ	BALUN FBA04HA90088-00 T/Y	S	AB	AB
	IC 1002	QSOCZ0115SC32	SOCKET IC 32 PIN	S	AA	AB
	J 0002	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0013	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	J 0065	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0098	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0126	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0132	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0207	RCILP0282BMZZ	COIL RLB0912-1R5M DIONIX-BULK	S	AA	AD
	J 0218	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0219	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0220	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0240	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0279	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0281	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0283	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0286	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0289	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0294	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0302	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0310	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0313	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0335	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0336	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0338	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0339	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0341	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0342	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	J 0701	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	JF 100	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JF 0003	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JF 0014	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
	JF 0020	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JF 0022	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JF 0039	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JF 0046	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JF 0047	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JF 1001	---	(70FW57E)	-	--	--
	JF 1001	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD 81FW57E	S	AA	AA
	JF 0052	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	JL 0012	QCNW-2803BMZZ	COAXIAL WIRE 1 WAY	S	AA	AD
	T 0702	VHDBTW34F//-1	DIODE BT134W-500	S	AD	AE
	PWB-B		**FRONTAL POWER**			
			INTEGRATED CIRCUITS			
	OPC1	RH-IX1601BMZZ	IC OPC	S	AD	AM
			DIODES			
	D 6751	RH-PX0105BMZZ	LED SPB-25MVW ROHM	S	AC	AC
	D 6752	RH-PX0105BMZZ	LED SPB-25MVW ROHM	S	AC	AC
			CAPACITORS			
	C 6715	VCKYTV1CF105Z	CERAM C 1UF 16V 2125SMD	S	AA	AA
			RESISTORS			
	R 6701	VRD-RA2HD124J	RES 120KOHM 5% 1/2W	S	AA	AA
	R 6702	VRD-RA2HD124J	RES 120KOHM 5% 1/2W	S	AA	AA
	R 6738	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 6739	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
	R 6751	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
			MISCELLANEOUS PARTS			
⚠	F 6701	QFS-C3226CEZZ	FUSE T3.15AH 250V	S	AC	AE
		QFSHD1001BMZZ	FUSE HOLD.EYF52BC=PANASON	S	AA	AA
		QFSHD1002BMZZ	FUSE HOLD.EYF52BC=PANASON	S	AA	AA
		GCOVA1512BMSA	DECORATION	S	AA	AB
	(A)0000	QPLGN0207CEZZ	PLUG	S	AA	AA
	(M)0000	QPLGN0304CEZZ	PLUG	S	AA	AB
	(OPC)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(RC)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(ST)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(SW0001	QPLGN0341CEZZ	PLUG	S	AA	AA
	(SW0002	QPLGN0341CEZZ	PLUG	S	AA	AA
	LP 6701	RLAMP0001BMZZ	NEON TYPE 4/30HB NEOTRONIC	S	AB	AC
	M 6701	RRMCU0205BMZZ	R/C RECEIVER TS0P2838 TFK	S	AB	AF
⚠	S 6701	QSW-P0600BMZZ	SWITCH S40 3110432713 GDE	S	AF	AL
	S 6702	QSW-K0079GEZZ	TACTILE SWITCH	S	AA	AA
	S 6703	QSW-K0079GEZZ	TACTILE SWITCH	S	AA	AA
	S 6704	QSW-K0079GEZZ	TACTILE SWITCH	S	AA	AA
	S 6705	QSW-K0079GEZZ	TACTILE SWITCH	S	AA	AA
	PWB-C		**FRONTAL SIGNAT UNIT**			
			COILS			
	L 0317	VP-DF3R3K0000	PEAK COIL 3,3UH 10%	S	AB	AB
	L 0318	VP-DF3R3K0000	PEAK COIL 3,3UH 10%	S	AB	AB
			CAPACITORS			
	C 0336	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0337	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
	C 0428	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 0429	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
			RESISTORS			
	R 0316	VRS-TV1JD391J	2125 390 OHM 5% 1/10W SMD	S	AA	AA
	R 0317	VRS-TV1JD391J	2125 390 OHM 5% 1/10W SMD	S	AA	AA
	R 0449	VRD-RA2EE750J	RES 75 OHM 5% 1/4W	S	AA	AA
			MISCELLANEOUS PARTS			
	(CC0000	QPLGN0241CEZZ	PLUG	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
(CN0004	QJAKJ0047CEZZ	EARPHONE JACK HSJ0998-72	S	AA	AG
(FV0000	QPLGN0241CEZZ	PLUG	S	AA	AA
(HD0000	QPLGN0341CEZZ	PLUG	S	AA	AA
(SS0000	QPLGN0341CEZZ	PLUG	S	AA	AA
J 0401	QJAKZ0015CEZZ	JACK	S	AH	AM
JF 0001	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
JF 0003	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
PWB-D		**SOCKET UNIT**			
		INTEGRATED CIRCUITS			
IC 1601	RH-IX1596BMZZ	IC OPAM BA10358 ROHM	S	AA	AD
IC 0850	VHITDA6111Q-1	IC TDA6111Q PHILIPS	S	AH	AQ
IC 0851	VHITDA6111Q-1	IC TDA6111Q PHILIPS	S	AH	AQ
IC 0852	VHITDA6111Q-1	IC TDA6111Q PHILIPS	S	AH	AQ
		TRANSISTORS			
Q 0851	VS2SA1246//1E	TRT A1246	S	AA	AB
Q 0852	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 0853	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 0854	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 0855	RH-TX0143BMZZ	TRT TBC 557-B TOSHIBA	S	AA	AA
Q 0856	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 0857	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 0858	RH-TX0143BMZZ	TRT TBC 557-B TOSHIBA	S	AA	AA
Q 0859	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 0860	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 0861	RH-TX0143BMZZ	TRT TBC 557-B TOSHIBA	S	AA	AA
Q 1603	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 1604	RH-TX0143BMZZ	TRT TBC 557-B TOSHIBA	S	AA	AA
Q 5405	RH-TX0111BMZZ	TRT PH-2369 PHILIPS	S	AA	AB
Q 5406	RH-TX0135BMZZ	TRT BF324 PH	S	AB	AC
Q 5407	VS2SA1837//-1	TRT A1837	S	AB	AE
Q 5408	VS2SC4793//-1	TRT C4793	S	AB	AE
Q 5410	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 5411	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
Q 5412	RH-TX0143BMZZ	TRT TBC 557-B TOSHIBA	S	AA	AA
Q 5414	RH-TX0108BMZZ	TRT BC635	S	AA	AC
		DIODES			
D 0851	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 0852	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 0861	RH-DX0501BMZZ	DIODE 1N4004	S	AA	AA
D 0862	RH-DX0501BMZZ	DIODE 1N4004	S	AA	AA
D 0863	RH-DX0501BMZZ	DIODE 1N4004	S	AA	AA
D 0864	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 0865	RH-EX0408BMZZ	ZENER DIODE BZX79C5V1	S	AB	AB
D 0866	RH-EX0408BMZZ	ZENER DIODE BZX79C5V1	S	AB	AB
D 0867	RH-EX0408BMZZ	ZENER DIODE BZX79C5V1	S	AB	AB
D 0868	RH-EX0409BMZZ	ZENER DIODE BZX79C5V6	S	AA	AA
D 0869	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 0870	---	70FW57E	-	--	--
D 0870	RH-DX0045BMZZ	DIODE 1N4148 81FW57E	S	AA	AA
D 1607	RH-EX0400BMZZ	ZENER DIODE BZX79C2V4	S	AA	AB
D 5408	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 5409	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 5411	RH-EX0418BMZZ	ZENER DIODE BZX79C13V	S	AB	AB
		COILS			
L 0864	RCILP0276BMZZ	COIL AR621LY-470K=R TOKO	S	AC	AD
L 1603	VP-DF470K0000	PEAK COIL 47UH 10%	S	AB	AB
		CAPACITORS			
C 0850	VCEAGA1CW337M	ELEC C 330UF 20% 16V	S	AA	AC
C 0851	VCEAGA1CW476M	ELEC C 47UF 20% 16V	S	AA	AA
C 0852	RC-FZ4103BMNJ	POL FILM C 10nF 50V 5% ECQ-B PANAS	S	AA	AA
C 0853	VCEAGA1CW108M	ELEC C 1000UF 20% 16V	S	AA	AC
C 0854	VCCCPA1HH100D	CERAM C 10PF 05% 50V	S	AA	AA
C 0855	VCCCPA1HH100D	CERAM C 10PF 05% 50V	S	AA	AA
C 0856	RC-FZ4224BMNJ	POL FILM C 220nF 50V 5% ECQ-V PANAS	S	AA	AB

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
C 0857	VCCCPA1HH100D	CERAM C 10PF 05% 50V	S	AA	AA
C 0859	RC-FZ4104BMNJ	POL FILM C 100nF 50V 5% ECQ-V PANAS	S	AA	AA
C 0861	VCCCPA1HH5R0C	CERAM C 5PF % 50V	S	AA	AA
C 0862	VCCCPA1HH7R0D	CERAM C 7PF % 50V	S	AA	AA
C 0863	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 0865	VCCCPA1HH5R0C	CERAM C 5PF % 50V	S	AA	AA
C 0868	VCEAGH2EW107M	ELEC C 100MF 20% 250V	S	AC	AH
C 0869	VCKYPB3DE472Z	C DE1110-1E472Z2K MURATA	S	AA	AC
C 0871	RC-FZ4103BMNJ	POL FILM C 10nF 50V 5% ECQ-B PANAS	S	AA	AA
C 0874	RC-FZ4103BMNJ	POL FILM C 10nF 50V 5% ECQ-B PANAS	S	AA	AA
C 0877	RC-FZ4103BMNJ	POL FILM C 10nF 50V 5% ECQ-B PANAS	S	AA	AA
C 0880	VCFYAA2EA333K	POL FILM C 33NF 10% 250V	S	AC	AE
C 0881	VCCSPA1HL561J	CERAM C 560PF 5% 50V	S	AA	AA
C 0882	VCFYAA2EA333K	POL FILM C 33NF 10% 250V	S	AC	AE
C 0883	VCCSPA1HL561J	CERAM C 560PF 5% 50V	S	AA	AA
C 0884	VCFYAA2EA333K	POL FILM C 33NF 10% 250V	S	AC	AE
C 0885	VCCSPA1HL561J	CERAM C 560PF 5% 50V	S	AA	AA
C 0887	VCEAGA1CW227M	ELEC C 220UF 20% 16V	S	AA	AA
C 0890	RC-FZ4223BMNJ	POL FILM C 22nF 50V 5% ECQ-B PANAS	S	AA	AA
C 0891	VCCCPA1HH101J	C CAPACITOR	S	AA	AA
C 0892	VCCCPA1HH101J	C CAPACITOR	S	AA	AA
C 0893	VCCCPA1HH101J	C CAPACITOR	S	AA	AA
C 0894	---	70FW57E	-	--	--
C 0894	VCEAGA1HW105M	ELEC C 1UF 20% 50V 81FW57E	S	AA	AA
C 1608	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 1609	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 1610	RC-FZ4104BMNJ	POL FILM C 100nF 50V 5% ECQ-V PANAS	S	AA	AA
C 1611	RC-FZ4102BMNJ	POL FILM C 1nF 50V 5% ECQ-B PANAS	S	AA	AA
C 1612	VCEAGA1EW227M	ELEC C 220UF 20% 25V	S	AA	AA
C 1613	VCEAGA1EW227M	ELEC C 220UF 20% 25V	S	AA	AA
C 5405	RC-FZ4224BMNJ	POL FILM C 220nF 50V 5% ECQ-V PANAS	S	AA	AB
C 5407	RC-FZ4103BMNJ	POL FILM C 10nF 50V 5% ECQ-B PANAS	S	AA	AA
C 5408	VCKYPA2HB102K	CERAM C 1NF 10% 500V	S	AA	AA
C 5409	RC-FZ4122BMNJ	POL FILM C 1,2NF 50V 5% ECQ-B PANAS	S	AA	AA
C 5414	VCEAGA2CW226M	ELEC C 22UF 20% 160V	S	AA	AC
C 5416	VCCCPA1HH100D	CERAM C 10PF 05% 50V	S	AA	AA
C 5418	VCEAGA1CW476M	ELEC C 47UF 20% 16V	S	AA	AA
C 5419	VCEAGA1HW106M	ELEC C 10UF 20% 50V	S	AA	AA
C 5420	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
C 5421	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
C 5422	RC-FZ4473BMNJ	POL FILM C 47nF 50V 5% ECQ-B PANAS	S	AA	AA
C 5424	RC-FZ6683BMNJ	PP FILM C 68NF 5% 250V	S	AA	AB
		RESISTORS			
R 0853	VRD-RA2BE223J	RES 22KOHM 5% 1/8W	S	AA	AA
R 0854	VRD-RA2BE471J	RES 470 OHM 5% 1/8W	S	AA	AA
R 0855	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0856	VRD-RA2EE680J	RES 68 OHM 5% 1/4W	S	AA	AA
R 0857	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
R 0858	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
R 0859	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
R 0860	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
R 0861	VRD-RA2BE152J	RES 1,5KOHM 5% 1/8W	S	AA	AA
R 0862	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
R 0863	VRD-RA2BE152J	RES 1,5KOHM 5% 1/8W	S	AA	AA
R 0864	VRD-RA2BE471J	RES 470 OHM 5% 1/8W	S	AA	AA
R 0865	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
R 0866	VRD-RA2BE152J	RES 1,5KOHM 5% 1/8W	S	AA	AA
R 0867	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA
R 0868	VRD-RA2BE152J	RES 1,5KOHM 5% 1/8W	S	AA	AA
R 0869	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
R 0870	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
R 0872	VRD-RA2BE682J	RES 6,8KOHM 5% 1/8W	S	AA	AA
R 0873	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
R 0874	VRD-RA2BE471J	RES 470 OHM 5% 1/8W	S	AA	AA
R 0875	VRD-RA2BE682J	RES 6,8KOHM 5% 1/8W	S	AA	AA
R 0876	VRD-RA2BE682J	RES 6,8KOHM 5% 1/8W	S	AA	AA
R 0880	VRS-VV3DB683J	MET OX RES 68KOHM 5% 2W	S	AA	AA
R 0881	VRD-RA2BE750J	RES 75 OHM 5% 1/8W	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	R 0882	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 0883	VRS-VV3DB683J	MET OX RES 68KOHM 5% 2W	S	AA	AA
	R 0884	VRS-VV3DB683J	MET OX RES 68KOHM 5% 2W	S	AA	AA
	R 0885	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
	R 0886	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
	R 0887	VRD-RA2HD331J	RES 330 OHM 5% 1/2W	S	AA	AA
	R 0888	VRC-MA2HG681J	SOLID R 680 OHM 5% 1/2W	S	AA	AB
	R 0889	VRD-RA2HD331J	RES 330 OHM 5% 1/2W	S	AA	AA
	R 0891	VRC-MA2HG681J	SOLID R 680 OHM 5% 1/2W	S	AA	AB
	R 0892	VRD-RA2HD331J	RES 330 OHM 5% 1/2W	S	AA	AA
	R 0894	VRC-MA2HG681J	SOLID R 680 OHM 5% 1/2W	S	AA	AB
	R 0895	VRD-RA2BE392J	RES 3,9KOHM 5% 1/8W	S	AA	AA
	R 1615	VRD-RA2BE105J	RES 1MOHM 5% 1/8W	S	AA	AA
	R 1616	VRD-RA2BE104J	RES 100KOHM 5% 1/8W	S	AA	AA
	R 1617	VRD-RA2BE222J	RES 2,2KOHM 5% 1/8W	S	AA	AA
	R 1618	VRD-RA2BE104J	RES 100KOHM 5% 1/8W	S	AA	AA
	R 1619	VRD-RA2BE473J	RES 47KOHM 5% 1/8W	S	AA	AA
	R 1620	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
	R 1621	VRS-VV3AB101J	MET OX RES 100 OHM 5% 1W	S	AA	AA
	R 1622	VRD-RA2BE471J	RES 470 OHM 5% 1/8W	S	AA	AA
	R 1623	VRS-VV3AB101J	MET OX RES 100 OHM 5% 1W	S	AA	AA
	R 1624	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 1801	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
	R 5415	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
	R 5416	VRD-RA2BE823J	RES 82KOHM 5% 1/8W	S	AA	AA
	R 5418	VRD-RA2BE823J	RES 82KOHM 5% 1/8W	S	AA	AA
	R 5419	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
	R 5420	VRD-RA2EE3R3J	RES 3,3 OHM 5% 1/4W	S	AA	AA
	R 5421	VRD-RA2EE3R3J	RES 3,3 OHM 5% 1/4W	S	AA	AA
	R 5424	VRS-VV3DB102J	MET OX RES 1KOHM 5% 2W	S	AA	AA
	R 5425	VRS-VV3DB272J	MET OX RES 2,7KOHM 5% 2W	S	AA	AA
	R 5427	VRD-RA2BE222J	RES 2,2KOHM 5% 1/8W	S	AA	AA
	R 5431	VRD-RA2BE391J	RES 390 OHM 5% 1/8W	S	AA	AA
	R 5432	VRD-RA2BE180J	RES 18 OHM 5% 1/8W	S	AA	AA
	R 5433	VRD-RA2BE101J	RES 100 OHM 5% 1/8W	S	AA	AA
	R 5434	VRD-RA2BE152J	RES 1,5KOHM 5% 1/8W	S	AA	AA
	R 5435	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
	R 5436	VRD-RA2BE221J	RES 220 OHM 5% 1/8W	S	AA	AA
	R 5437	RR-XZ0200BMZZ	FUS RES 1R0 TAP 5% 1/2W	S	AA	AB
	R 5438	VRD-RA2BE270J	RES 27 OHM 5% 1/8W	S	AA	AA
	R 5439	VRD-RA2BE270J	RES 27 OHM 5% 1/8W	S	AA	AA
	R 5440	VRD-RA2BE270J	RES 27 OHM 5% 1/8W	S	AA	AA
	R 5441	---	70FW57E	-	--	--
	R 5441	VRD-RA2HD102J	RES 1KOHM 5% 1/2W 81FW57E	S	AA	AA
	R 5442	VRD-RA2BE100J	RES 10 OHM 5% 1/8W	S	AA	AA
	R 5443	VRD-RA2BE100J	RES 10 OHM 5% 1/8W	S	AA	AA
	R 5444	VRD-RA2BE100J	RES 10 OHM 5% 1/8W	S	AA	AA
	R 5445	VRD-RA2BE151J	RES 150 OHM 5% 1/8W	S	AA	AA
	R 5446	VRD-RA2BE100J	RES 10 OHM 5% 1/8W	S	AA	AA
	R 5447	VRD-RA2BE392J	RES 3,9KOHM 5% 1/8W	S	AA	AA
			MISCELLANEOUS PARTS			
⚠		QSOCV0103BMZZ	CRT SOCKET 70FW57E	S	AD	AG
⚠		QSOCV0936CEZZ	CRT SOCKET 81FW57E	S	AF	AM
	(B)	QPLGN0341CEZZ	PLUG	S	AA	AA
	(H)0000	QPLGN0541CEZZ	PLUG	S	AA	AA
	(K)0000	QPLGN0841CEZZ	PLUG	S	AA	AA
	(L)0002	QTIPM0017CEFM	TIP	S	AA	AA
	(MO)	QPLGN0441CEZZ	PLUG 4PIN	S	AA	AA
	(RT)	QPLGN0241CEZZ	PLUG	S	AA	AA
	(SVM)	QPLGN0341CEZZ	PLUG	S	AA	AA
	JF1	QJUM-4001GEFW	JUMPER (70FW57E)	S	--	--
	JF1	VRD-RA2BE104J	RES 100KOHM 5% 1/8W (81FW57E)	S	AA	AA
	PWB-E		**AUDIO AMPLIFIER**			
			INTEGRATED CIRCUITS			
	IC 1300	VHIBA4558F/-1	IC BA4558F-E2 ROHM OP-AMP	S	AA	AC
	IC 1302	VHITDA7480/-1	IC TDA7480 THOMSON	S	AF	AK

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
			TRANSISTORS			
	Q 1301	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
			DIODES			
	D 1303	RH-EX0411BMZZ	ZENER DIODE BZX79C6V8	S	AA	AA
	D 1304	RH-EX0411BMZZ	ZENER DIODE BZX79C6V8	S	AA	AA
			COILS			
	L 1301	RCILP0278BMZZ	COIL A823LY-680K TOKO	S	AA	AD
	L 1302	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
	L 1303	VP-CF3R3K0000	PEAK COIL 3.3UH 10%	S	AB	AB
			CAPACITORS			
	C 1302	RC-FZ4334BMNJ	POL FILM C 330nF 50V 5% ECQ-V PANAS	S	AA	AB
	C 1303	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
	C 1304	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1305	VCEAGA1HW225M	ELEC C 2,2UF 20% 50V	S	AA	AB
	C 1306	VCEAGA1EW227M	ELEC C 220UF 20% 25V	S	AA	AA
	C 1307	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1308	VCKYTV1HB472K	CERAM C 4,7NF 50V 2125SMD	S	AA	AA
	C 1309	RC-FZ4104BMNJ	POL FILM C 100nF 50V 5% ECQ-V PANAS	S	AA	AA
	C 1310	VCEAGA1EW227M	ELEC C 220UF 20% 25V	S	AA	AA
	C 1311	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
	C 1312	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
	C 1313	VCCCTV1HH561J	CERAM C 560PF 50V 2125SMD	S	AA	AA
	C 1314	RC-FZ4474BMNJ	POL FILM C 470nF 50V 5% ECQ-V PANAS	S	AA	AB
	C 1315	RC-FZ4104BMNJ	POL FILM C 100nF 50V 5% ECQ-V PANAS	S	AA	AA
			RESISTORS			
	R 1301	VRS-TV1JD123J	2125 12KOHM 5% 1/10W SMD	S	AA	AA
	R 1302	VRS-TV1JD123J	2125 12KOHM 5% 1/10W SMD	S	AA	AA
	R 1304	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	R 1307	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
	R 1308	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
	R 1309	VRS-TV1JD273J	2125 27KOHM 5% 1/10W SMD	S	AA	AA
	R 1310	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
	R 1311	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
	R 1312	VRS-TV1JD123J	2125 12KOHM 5% 1/10W SMD	S	AA	AA
	R 1313	VRS-TV1JD151J	2125 150 OHM 5% 1/10W SMD	S	AA	AA
			MISCELLANEOUS PARTS			
	(SB0000	QPLGN0685CEZZ	PLUG	S	AA	AB
	(SF0000	QPLGN0241CEZZ	PLUG	S	AA	AA
	(VS0000	QPLGN0341CEZZ	PLUG	S	AA	AA
	JF 0001	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
	PWB-F		**DIGITAL MODULE (7270)**			**(See Page 51)**
			INTEGRATED CIRCUITS			
	IC 6001	RH-IX1616BMZZ	IC VPC3210A-PS-ESPLCC ITT	S	BE	BH
	IC 6002	RH-IX1625BMZZ	IC CIP3250A-PS-B1PLCC ITT	S	AY	BA
	IC 6003	RH-IX1681BMZZ	IC SDA 9400	S	BD	BU
	IC 6004	RH-IX1705BMZZ	IC DDP3310B-D3 MICRONAS	S	AU	BF
	IC 6004	RH-IX1788BMZZ	IC DDP3310B-E4 MICRONAS	S	AU	BF
	IC 6005	RH-IX1674BMZZ	IC KA431AZ SAMSUNG	S	AA	AD
	IC 6006	RH-IX1556BMZZ	IC BA10393 S0P8 SMD ROHM	S	AC	AD
			TRANSISTORS			
	Q 6003	RH-TX0102BMZZ	TRT BC338	S	AA	AB
	Q 6006	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 6008	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 6009	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 6010	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 6011	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 6012	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
	Q 6015	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
	Q 6021	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
Q 6022	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
Q 6023	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6024	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
Q 6025	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6026	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
		DIODES			
D 6001	RH-EX0544BMZZ	ZENER DIODE TZMC4V7 TFK SMD	S	AA	AA
D 6002	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6003	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6004	RH-EX0544BMZZ	ZENER DIODE TZMC4V7 TFK SMD	S	AA	AA
D 6005	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6006	RH-EX0561BMZZ	ZENER DIODE TZMC24 TFK SMD	S	AA	AA
D 6007	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6008	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6010	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6013	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6014	RH-EX0546BMZZ	ZENER DIODE TZMC5V6 TFK SMD	S	AA	AA
D 6015	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
		PACKAGED CIRCUITS			
X 1003	RCRSB0236BMZZ	CRYSTAL 5MHZ ACAL	S	AB	AG
X 6001	RCRSB0219BMZZ	CRYSTAL 20.25 HMZ	S	AG	AH
X 6002	RCRSB0242BMZZ	CRYSTAL 27MHZ	S	AC	AH
		COILS			
L 6001	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6002	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6003	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6004	VP-NM100KR42N	COIL 10UH SMD	S	AA	AC
L 6005	VP-NM1R0MR10N	COIL 1UH SMD	S	AB	AB
L 6006	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6007	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6009	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6010	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6011	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6012	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
		CAPACITORS			
C 6001	VCEAGA1HW105M	ELEC C 1UF 20% 50V	S	AA	AA
C 6002	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6003	VCEAGA1HW105M	ELEC C 1UF 20% 50V	S	AA	AA
C 6004	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6005	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6006	VCEAGA1HW105M	ELEC C 1UF 20% 50V	S	AA	AA
C 6007	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 6008	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6009	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 6110	VCKYTV1HB393K	CERAM C 39NF 50V 2125SMD	S	AA	AA
C 6011	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6012	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6013	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6014	VCEAGA1HW335M	ELEC C 3,3UF 20% 50V	S	AA	AA
C 6015	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6016	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
C 6017	VCKYTV1HF223Z	CERAM C 22NF 50V 2125SMD	S	AA	AA
C 6018	VCKYTV1HF153Z	CERAM C 15NF 50V 2125SMD	S	AA	AA
C 6019	VCKYTV1HF153Z	CERAM C 15NF 50V 2125SMD	S	AA	AA
C 6020	VCKYTV1HF153Z	CERAM C 15NF 50V 2125SMD	S	AA	AA
C 6021	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
C 6022	VCKYTV1HF223Z	CERAM C 22NF 50V 2125SMD	S	AA	AA
C 6023	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
C 6024	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
C 6027	VCEAGA0JW477M	ELEC C 470UF 20% 6,3V	S	AA	AA
C 6028	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6029	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6030	VCEAGA0JW477M	ELEC C 470UF 20% 6,3V	S	AA	AA
C 6031	VCCCTV1HH3R3C	CERAM C 3,3PF 50V 2125SMD	S	AA	AA
C 6032	VCCCTV1HH3R3C	CERAM C 3,3PF 50V 2125SMD	S	AA	AA
C 6033	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6034	VCEAGA0JW477M	ELEC C 470UF 20% 6,3V	S	AA	AA
C 6035	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 6036	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6039	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6040	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6041	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6042	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6043	VCCCTV1HH560J	CERAM C 56PF 50V 2125SMD	S	AA	AA
C 6044	VCCCTV1HH270J	CERAM C 27PF 50V 2125SMD	S	AA	AA
C 6045	VCCCTV1HH270J	CERAM C 27PF 50V 2125SMD	S	AA	AA
C 6046	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6047	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6048	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6049	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6050	VCCCTV1HH560J	CERAM C 56PF 50V 2125SMD	S	AA	AA
C 6053	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6054	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6057	VCCCTV1HH560J	CERAM C 56PF 50V 2125SMD	S	AA	AA
C 6060	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
C 6063	VCCCTV1HH560J	CERAM C 56PF 50V 2125SMD	S	AA	AA
C 6064	VCKYTV1HB472K	CERAM C 4,7NF 50V 2125SMD	S	AA	AA
C 6065	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 6066	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6067	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6068	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
C 6069	VCEAGA1CW107M	ELEC C 100UF 20% 16V	S	AA	AA
C 6072	VCCCTV1HH330J	CERAM C 33PF 50V 2125SMD	S	AA	AA
C 6073	VCCCTV1HH330J	CERAM C 33PF 50V 2125SMD	S	AA	AA
C 6074	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6078	VCKYTV1CF105Z	CERAM C 1UF 16V 2125SMD	S	AA	AA
C 6079	RC-FZ9223BMNJ	POL FILM C 22NF 5% 63V	S	AA	AB
C 6081	VCCCTV1HH221J	CERAM C 220PF 50V 2125SMD	S	AA	AA
C 6082	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6083	RC-FZ9154BMNJ	POL FILM C 150NF 5% 63V	S	AA	AB
C 6085	VCKZPA1HF103Z	CERAM C 10NF % 50V	S	AA	AA
C 6109	VCKYTV1CF105Z	CERAM C 1UF 16V 2125SMD	S	AA	AA
C 6201	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6202	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6205	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6207	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6209	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6212	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6213	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6214	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6218	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6219	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6227	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6236	VCCCPA1HH101J	C CAPACITOR	S	AA	AA
C 6306	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6308	VCEAGA1CW107M	ELEC C 100UF 20% 16V	S	AA	AA
		RESISTORS			
R 6001	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6002	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6003	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
R 6004	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6005	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
R 6006	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
R 6007	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
R 6008	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6009	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6010	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6011	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6012	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6013	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6014	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6015	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6016	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6017	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6018	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6019	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6020	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6021	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6022	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6023	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6024	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6025	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6026	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6027	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6028	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6029	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6030	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6031	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6032	VRS-TV1JD103F	2125 10KOHM 1% 1/10W SMD	S	AA	AA
R 6035	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6036	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
R 6037	VRS-TV1JD562J	2125 5,6KOHM 5% 1/10W SMD	S	AA	AA
R 6038	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
R 6039	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
R 6040	VRS-TV1JD122J	2125 1,2KOHM 5% 1/10W SMD	S	AA	AA
R 6041	VRS-TV1JD181J	2125 180 OHM 5% 1/10W SMD	S	AA	AA
R 6042	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 6043	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
R 6048	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6049	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6050	RR-XZ0204BMZZ	FUS RES 2R2 TAP 5% 1/2W	S	AA	AB
R 6051	VRS-TV1JD271J	2125 270 OHM 5% 1/10W SMD	S	AA	AA
R 6052	VRS-TV1JD821F	2125 820 OHM 1% 1/10W SMD	S	AA	AA
R 6054	VRS-TV1JD272F	2125 2,7KOHM 1% 1/10W SMD	S	AA	AA
R 6065	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
R 6068	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
R 6069	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
R 6071	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 6072	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 6073	VRS-TV1JD561J	2125 560 OHM 5% 1/10W SMD	S	AA	AA
R 6074	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 6075	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6080	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6081	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6082	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6083	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6084	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6085	VRS-TV1JD271J	2125 270 OHM 5% 1/10W SMD	S	AA	AA
R 6086	VRS-TV1JD105J	2125 1MOHM 5% 1/10W SMD	S	AA	AA
R 6087	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6088	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6089	VRS-TV1JD122J	2125 1,2KOHM 5% 1/10W SMD	S	AA	AA
R 6090	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
R 6092	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6095	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6096	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6097	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6098	VRS-TV1JD331J	2125 330 OHM 5% 1/10W SMD	S	AA	AA
R 6099	VRS-TV1JD680J	2125 68 OHM 5% 1/10W SMD	S	AA	AA
R 6100	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6101	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6102	VRS-TV1JD334J	2125 330KOHM 5% 1/10W SMD	S	AA	AA
R 6103	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6104	VRS-TV1JD475J	2125 4,7MOHM 5% 1/10W SMD	S	AA	AA
R 6105	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
R 6106	VRS-TV1JD683J	2125 68KOHM 5% 1/10W SMD	S	AA	AA
R 6107	VRS-TV1JD564J	2125 560KOHM 5% 1/10W SMD	S	AA	AA
R 6117	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6118	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6123	VRS-TV1JD333J	2125 33KOHM 5% 1/10W SMD	S	AA	AA
R 6124	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6125	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6126	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6128	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
R 6129	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
R 6130	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
R 6307	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6308	VRD-RA2BE100J	RES 10 OHM 5% 1/8W	S	AA	AA
		MISCELLANEOUS PARTS			
(KA)	QPLGN0842CEZZ	PLUG	S	AA	AB
(RGB)	QPLGN0442CEZZ	PLUG	S	AA	AA
(YA0000	QPLGN1285CEZZ	PLUG	S	AB	AD
(YB0000	QPLGN1285CEZZ	PLUG	S	AB	AD
(YC0000	QPLGN1285CEZZ	PLUG	S	AB	AD
FB 0001	RCORF0002BMZZ	FERRITE CORE TFC-16816EX	S	AF	AK
FB 6201	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6202	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6203	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6204	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6205	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6206	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6207	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6208	RCORF0003GEZZ	SMDFERRIT HF50ACB322513	S	AA	AC
FB 6210	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6211	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6212	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
PWB-G		**DIGITAL MODULE (7295)**		**(See Page 51)**	
		INTEGRATED CIRCUITS			
IC 6001	RH-IX1790BMZZ	IC VPC3230D-BZ MICRONAS	S	AV	BG
IC 6002	RH-IX1681BMZZ	IC SDA 9400	S	BD	BU
IC 6003	RH-IX1788BMZZ	CI DDP3310B-E4 MICRONAS	S	AU	BF
IC 6005	RH-IX1674BMZZ	IC KA431AZ SAMSUNG	S	AA	AD
IC 6006	RH-IX1556BMZZ	IC BA10393 S0P8 SMD ROHM	S	AC	AD
		TRANSISTORS			
Q 6003	RH-TX0108BMZZ	TRT BC635	S	AA	AC
Q 6006	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6008	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6021	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6022	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA
Q 6023	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6024	VS2SA1037KQ-1	TRT BC807 SMD	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
Q 6025	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6026	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
Q 6027	VS2SC2412KQ-1	TRT 2SC2412 ROHM	S	AA	AA
		DIODES			
D 6001	RH-EX0544BMZZ	ZENER DIODE TZMC4V7 TFK SMD	S	AA	AA
D 6002	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6003	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6004	RH-EX0544BMZZ	ZENER DIODE TZMC4V7 TFK SMD	S	AA	AA
D 6005	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6006	RH-EX0561BMZZ	ZENER DIODE TZMC24 TFK SMD	S	AA	AA
D 6007	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6008	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6010	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
D 6013	RH-EX0540BMZZ	ZENER DIODE TZMC3V3 TFK SMD	S	AA	AA
D 6014	RH-EX0546BMZZ	ZENER DIODE TZMC5V6 TFK SMD	S	AA	AA
D 6015	RH-DX0551BMZZ	DIODE LL4148 TFK SMD	S	AA	AA
		PACKAGED CIRCUITS			
X 1003	RCRSB0236BMZZ	CRYSTAL 5MHZ ACAL	S	AB	AG
X 6001	RCRSB0219BMZZ	CRYSTAL 20.25 HMZ	S	AG	AH
X 6002	RCRSB0242BMZZ	CRYSTAL 27MHZ	S	AC	AH
		COILS			
L 6001	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6002	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6003	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6004	VP-NM100KR42N	COIL 10UH SMD	S	AA	AC
L 6005	VP-NM1R0MR10N	COIL 1UH SMD	S	AB	AB
L 6006	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
L 6007	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6008	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6009	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6010	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6012	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6013	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6014	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6015	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
L 6017	VP-NM3R3MR19N	COIL 3,3UH SMD	S	AA	AD
		CAPACITORS			
C 6001	VCKYTV1HF683Z	CERAM C 68NF 50V 2125SMD	S	AA	AA
C 6002	VCKYTV1HB152K	CERAM C 1,5NF 50V 2125SMD	S	AA	AA
C 6004	VCKYTV1HF683Z	CERAM C 68NF 50V 2125SMD	S	AA	AA
C 6005	VCKYTV1EF224Z	CERAM C 220NF 25V 2125SMD	S	AA	AA
C 6006	VCKYTV1HF473Z	CERAM C 47NF 50V 2125SMD	S	AA	AA
C 6007	VCKYTV1HB152K	CERAM C 1,5NF 50V 2125SMD	S	AA	AA
C 6008	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6009	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 6010	VCKYTV1HF683Z	CERAM C 68NF 50V 2125SMD	S	AA	AA
C 6011	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6012	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6013	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6014	VCEAGA1HW335M	ELEC C 3,3UF 20% 50V	S	AA	AA
C 6015	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6016	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
C 6017	VCKYTV1HF223Z	CERAM C 22NF 50V 2125SMD	S	AA	AA
C 6018	VCKYTV1HF153Z	CERAM C 15NF 50V 2125SMD	S	AA	AA
C 6019	VCKYTV1HF153Z	CERAM C 15NF 50V 2125SMD	S	AA	AA
C 6020	VCKYTV1HF153Z	CERAM C 15NF 50V 2125SMD	S	AA	AA
C 6021	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
C 6022	VCKYTV1HF223Z	CERAM C 22NF 50V 2125SMD	S	AA	AA
C 6023	VCEAGA1CW226M	ELEC C 22UF 20% 16V	S	AA	AA
C 6024	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6025	VCCCTV1HH391J	CERAM C 390PF 50V 2125SMD	S	AA	AA
C 6026	VCKYTV1HB152K	CERAM C 1,5NF 50V 2125SMD	S	AA	AA
C 6027	VCEAGA1CW476M	ELEC C 47UF 20% 16V	S	AA	AA
C 6028	VCKYTV1HF473Z	CERAM C 47NF 50V 2125SMD	S	AA	AA
C 6029	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6030	VCEAGA0JW477M	ELEC C 470UF 20% 6,3V	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
C 6031	VCCCTV1HH3R3C	CERAM C 3,3PF 50V 2125SMD	S	**	AA
C 6032	VCCCTV1HH3R3C	CERAM C 3,3PF 50V 2125SMD	S	**	AA
C 6033	VCKYTV1HF103Z	CERAM C 10NF 50V 2125SMD	S	AA	AA
C 6034	VCEAGA0JW477M	ELEC C 470UF 20% 6,3V	S	AA	AA
C 6035	VCEAGA1CW476M	ELEC C 47UF 20% 16V	S	AA	AA
C 6036	VCKYTV1HF473Z	CERAM C 47NF 50V 2125SMD	S	AA	AA
C 6037	VCKYTV1HF473Z	CERAM C 47NF 50V 2125SMD	S	AA	AA
C 6038	VCCCTV1HH391J	CERAM C 390PF 50V 2125SMD	S	AA	AA
C 6039	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6040	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6041	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6042	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6043	VCCCTV1HH151J	CERAM C 150PF 50V 2125SMD	S	AA	AA
C 6044	VCCCTV1HH270J	CERAM C 27PF 50V 2125SMD	S	AA	AA
C 6045	VCCCTV1HH270J	CERAM C 27PF 50V 2125SMD	S	AA	AA
C 6046	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6047	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6048	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6049	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6050	VCCCTV1HH151J	CERAM C 150PF 50V 2125SMD	S	AA	AA
C 6051	VCKYTV1HB152K	CERAM C 1,5NF 50V 2125SMD	S	AA	AA
C 6052	VCKYTV1EF224Z	CERAM C 220NF 25V 2125SMD	S	AA	AA
C 6053	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6054	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6055	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
C 6056	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
C 6057	VCCCTV1HH151J	CERAM C 150PF 50V 2125SMD	S	AA	AA
C 6058	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
C 6059	VCCCTV1HH331J	CERAM C 330PF 50V 2125SMD	S	AA	AA
C 6060	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
C 6061	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6062	VCKYTV1EF334Z	CERAM C 330NF 25V 2125SMD	S	AA	AB
C 6063	VCCCTV1HH560J	CERAM C 56PF 50V 2125SMD	S	AA	AA
C 6064	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
C 6065	VCEAGA1CW106M	ELEC C 10UF 20% 16V	S	AA	AA
C 6066	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6067	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6068	VCKYTV1HB102K	CERAM C 1NF 50V 2125SMD	S	AA	AA
C 6069	VCEAGA1CW107M	ELEC C 100UF 20% 16V	S	AA	AA
C 6070	VCCCTV1HH151J	CERAM C 150PF 50V 2125SMD	S	AA	AA
C 6072	VCCCTV1HH330J	CERAM C 33PF 50V 2125SMD	S	AA	AA
C 6073	VCCCTV1HH330J	CERAM C 33PF 50V 2125SMD	S	AA	AA
C 6074	VCKYTV1HF104Z	CERAM C 100NF 50V 2125SMD	S	AA	AA
C 6078	VCKYTV1CF105Z	CERAM C 1UF 16V 2125SMD	S	AA	AA
C 6079	RC-FZ9223BMNJ	POL FILM C 22NF 5% 63V	S	AA	AB
C 6081	VCCCTV1HH221J	CERAM C 220PF 50V 2125SMD	S	AA	AA
C 6083	RC-FZ4154BMNJ	POL FILM C 150NF 50V 5% ECQ-V PANAS	S	--	--
C 6084	VCKYTV1HB222K	CERAM C 2,2NF 50V 2125SMD	S	AA	AA
C 6085	VCCCTV1HH330J	CERAM C 33PF 50V 2125SMD	S	AA	AA
C 6109	VCKYTV1CF105Z	CERAM C 1UF 16V 2125SMD	S	AA	AA
C 6110	VCKYTV1HB393K	CERAM C 39NF 50V 2125SMD	S	AA	AA
C 6225	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
C 6226	VCCCTV1HH101J	CERAM C 100PF 50V 2125SMD	S	AA	AA
		RESISTORS			
R 6001	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6002	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6003	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6004	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6005	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
R 6006	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
R 6007	VRS-TV1JD821J	2125 820 OHM 5% 1/10W SMD	S	AA	AA
R 6008	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6009	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6010	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6011	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6012	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6013	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6014	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6015	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA

REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
R 6016	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6017	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6018	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6019	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6020	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6021	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6022	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6023	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6024	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6025	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6026	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6027	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6028	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6029	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6030	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6031	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6032	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6035	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6036	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
R 6037	VRS-TV1JD562J	2125 5,6KOHM 5% 1/10W SMD	S	AA	AA
R 6038	VRS-TV1JD473J	2125 47KOHM 5% 1/10W SMD	S	AA	AA
R 6039	VRS-TV1JD472J	2125 4.7KOHM 5% 1/10W SMD	S	AA	AA
R 6040	VRS-TV1JD122J	2125 1,2KOHM 5% 1/10W SMD	S	AA	AA
R 6041	VRS-TV1JD181J	2125 180 OHM 5% 1/10W SMD	S	AA	AA
R 6042	VRS-TV1JD222J	2125 2,2KOHM 5% 1/10W SMD	S	AA	AA
R 6043	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
R 6048	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6049	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6050	RR-XZ0204BMZZ	FUS RES 2R2 TAP 5% 1/2W	S	AA	AB
R 6051	VRS-TV1JD271J	2125 270 OHM 5% 1/10W SMD	S	AA	AA
R 6052	VRS-TV1JD821F	2125 820 OHM 1% 1/10W SMD	S	AA	AA
R 6054	VRS-TV1JD272F	2125 2,7KOHM 1% 1/10W SMD	S	AA	AA
R 6068	VRS-TV1JD681J	2125 680 OHM 5% 1/10W SMD	S	AA	AA
R 6069	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
R 6071	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6072	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6073	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6074	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6075	VRS-TV1JD750J	2125 75 OHM 5% 1/10W SMD	S	AA	AA
R 6080	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6081	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6082	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6083	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6084	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6086	VRS-TV1JD105J	2125 1MOHM 5% 1/10W SMD	S	AA	AA
R 6087	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6088	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6089	VRS-TV1JD122J	2125 1,2KOHM 5% 1/10W SMD	S	AA	AA
R 6090	VRS-TV1JD153J	2125 15KOHM 5% 1/10W SMD	S	AA	AA
R 6092	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6095	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6096	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6097	VRS-TV1JD101J	2125 100 OHM 5% 1/10W SMD	S	AA	AA
R 6098	VRS-TV1JD331J	2125 330 OHM 5% 1/10W SMD	S	AA	AA
R 6099	VRS-TV1JD680J	2125 68 OHM 5% 1/10W SMD	S	AA	AA
R 6100	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6101	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6102	VRS-TV1JD334J	2125 330KOHM 5% 1/10W SMD	S	AA	AA
R 6103	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
R 6104	VRS-TV1JD475J	2125 4,7MOHM 5% 1/10W SMD	S	AA	AA
R 6105	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
R 6106	VRS-TV1JD683J	2125 68KOHM 5% 1/10W SMD	S	AA	AA
R 6107	VRS-TV1JD564J	2125 560KOHM 5% 1/10W SMD	S	AA	AA
R 6117	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6118	VRS-TV1JD104J	2125 100KOHM 5% 1/10W SMD	S	AA	AA
R 6124	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6125	VRS-TV1JD221J	2125 220 OHM 5% 1/10W SMD	S	AA	AA
R 6126	VRS-TV1JD102J	2125 1KOHM 5% 1/10W SMD	S	AA	AA
R 6127	VRS-TV1JD223J	2125 22KOHM 5% 1/10W SMD	S	AA	AA
R 6128	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
R 6129	VRS-TV1JD000J	2125 0 OHM 5% 1/10W SMD	S	AA	AA
R 6130	VRS-TV1JD271J	2125 270 OHM 5% 1/10W SMD	S	AA	AA
R 6307	VRS-TV1JD103J	2125 10KOHM 5% 1/10W SMD	S	AA	AA
		MISCELLANEOUS PARTS			
(KA)	QPLGN0842CEZZ	PLUG	S	AA	AB
(N0A)	QPWBF7295BMN0	PWBDIGITAL MODULE VPC	S	--	--
(RGB)	QPLGN0442CEZZ	PLUG	S	AA	AA
(YA0000	QPLGN1285CEZZ	PLUG	S	AB	AD
(YB0000	QPLGN1285CEZZ	PLUG	S	AB	AD
(YC0000	QPLGN1285CEZZ	PLUG	S	AB	AD
FB 6205	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6206	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6207	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6208	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6210	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6211	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
FB 6212	VRS-TQ2BD000J	3216 0 OHM 5% 1/8W SMD	S	AA	AA
PWB-H		**DINAMIC FOCUS (81FW57E-I/SE ONLY)**			
		INTEGRATED CIRCUITS			
IC 1601	RH-IX1596BMZZ	IC OPAM BA10358 ROHM	S	AA	AD
		TRANSISTORS			
Q 1601	VS2SC5022//1E	TRT C5022	S	AB	AF
Q 1602	RH-TX0142BMZZ	TRT TBC 547-B TOSHIBA	S	AA	AB
		DIODES			
D 1601	RH-DX0484CEZZ	DIODE RH2F SANKEN	S	AB	AE
D 1602	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 1603	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 1604	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
D 1605	RH-EX0417BMZZ	ZENER DIODE BZX79C12V	S	AA	AA
D 1606	RH-DX0045BMZZ	DIODE 1N4148	S	AA	AA
		TRANSFORMERS			
T 1602	RTRNZ0575BMZZ	TRANSFORMER	S	AG	AS
		CAPACITORS			
C 1601	RC-KZ0036CEZZ	CERAM C 330PF 2KV	S	AA	AB
C 1602	RC-KZ0036CEZZ	CERAM C 330PF 2KV	S	AA	AB
C 1603	RC-KZ0052CEZZ	CERAM C 1000PF 2KV MURATA	S	AA	AC
C 1604	VCFPVC3CA822H	PP FILM C 8,2NF 50% 1.6KV	S	AA	AD
C 1605	VCEAGA1HW335M	ELEC C 3,3UF 20% 50V	S	AA	AA
C 1612	VCEAGA1EW227M	ELEC C 220UF 20% 25V	S	AA	AA
C 1613	VCEAGA1EW227M	ELEC C 220UF 20% 25V	S	AA	AA
		RESISTORS			
R 1601	VRC-MA2HG333J	SOLID R 33KOHM 5% 1/2W	S	AA	AB
R 1602	VRS-VV3LB104J	MET OX RES 100KOHM 5% 3W	S	AA	AB
R 1603	VRS-VV3LB104J	MET OX RES 100KOHM 5% 3W	S	AA	AB
R 1604	VRS-VV3LB104J	MET OX RES 100KOHM 5% 3W	S	AA	AB
R 1605	VRS-VV3AB181J	MET OX RES 180 OHM 5% 1W	S	AA	AA
R 1606	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
R 1607	VRD-RA2BE103J	RES 10KOHM 5% 1/8W	S	AA	AA
R 1608	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
R 1609	VRD-RA2BE154J	RES 150KOHM 5% 1/8W	S	AA	AA
R 1610	VRD-RA2BE823J	RES 82KOHM 5% 1/8W	S	AA	AA
R 1611	VRD-RA2BE102J	RES 1KOHM 5% 1/8W	S	AA	AA
R 1612	VRD-RA2BE473J	RES 47KOHM 5% 1/8W	S	AA	AA
R 1613	VRD-RA2BE273J	RES 27KOHM 5% 1/8W	S	AA	AA
R 1625	VRD-RA2BE332J	RES 3,3KOHM 5% 1/8W	S	AA	AA
		MISCELLANEOUS PARTS			
	RVR-Z0001BMZZ	VAR-RESISTOR POT 8222 419 34301	S	AR	BC
(F)0000	QPLGN0505CEZZ	PLUG	S	AA	AB
(FF0000	QPLGN0505CEZZ	PLUG	S	AA	AB
(L)0005	QTIPM0017CEFM	TIP	S	AA	AA
(MO0000	QPLGN0441CEZZ	PLUG 4PIN	S	AA	AA

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	J 0011	VRC-MA2HG681J	SOLID R 680 OHM 5% 1/2W	S	AA	AB
			MISCELLANEOUS PARTS			
⚠		QACCZ2100BMSA	AC CORD	S	AH	AR
		RCILG0417BMZZ	DEGAUSING COIL 70FW57E	S	AQ	AX
		RCILG0419BMZZ	DEGAUSING COIL 81FW57E	S	AK	AR
		RRMCG1065BMSA	REMOTE CONTROLLER	S	AQ	AX
		VSP1004PB438A	SPEAKER 16:9 12W	S	AM	AU
		VSP1206PB437A	SPEAKER 12W 7 OHM	S	AE	AP
		TINS-6748BMN2	OWNERS MANUAL	S	AQ	BB
		LCHSM1011BMZZ	CHASSIS FRAME	S	AD	AL
			CABINET PARTS			
	1	CCABA1282BMV0	CABINET SET 70FW57E	S	BB	BR
	1	CCABA1274BMV0	CABINET SET 81FW57E	S	AZ	BN
	1.1	GDORF1050BMSB	DOOR 70FW57E	S	AC	AE

	REF No.	PARTS	DESCRIPTION	*	SN CODE	EX CODE
	1.1	GDORF1051BMSB	DOOR 81FW57E	S	AB	AE
	1.2	PKAI-1083BM00	DOOR LATCH 70FW57E	S	AC	AF
	1.2	PKAI-1083BM00	DOOR LATCH 81FW57E	S	AC	AF
	1.3	HINDP5096BMSA	INDICATOR FRONTAL 70FW57E	S	AB	AF
	1.3	HINDP5098BMSA	INDICATOR FRONTAL 81FW57E	S	AA	AE
	1.4	HBDGB3013MESA	BADGE	S	AD	AG
	1.5	HDECQ0027BMSA	LED DECORATION COVER 70FW57E	S	AA	AC
	1.5	HDECQ0029BMSA	LED DECORATION COVER 81FW57E	S	AA	AC
	1.6	JBTN-1042BMSB	BUTTON CONTROL 70FW57E	S	AC	AD
	1.6	JBTN-1044BMSB	BUTTON CONTROL 81FW57E	S	AA	AE
	1.7	HDECQ0028BMSA	DECORATION COVER 70FW57E	S	AA	AC
	1.7	HDECQ0030BMSA	NEON DECORATION 81FW57E	S	AA	AC
	1.8	JBTN-1043BMSB	BUTTON POWER 70FW57E	S	AC	AE
	1.8	JBTN-1045BMSB	BUTTON POWER 81FW57E	S	AA	AE
⚠	2	GCABB1106BMKA	REAR CABINET 70FW57E	S	AT	BE
⚠	2	GCABB1100BMKA	REAR CABINET 81FW57E	S	AU	BF

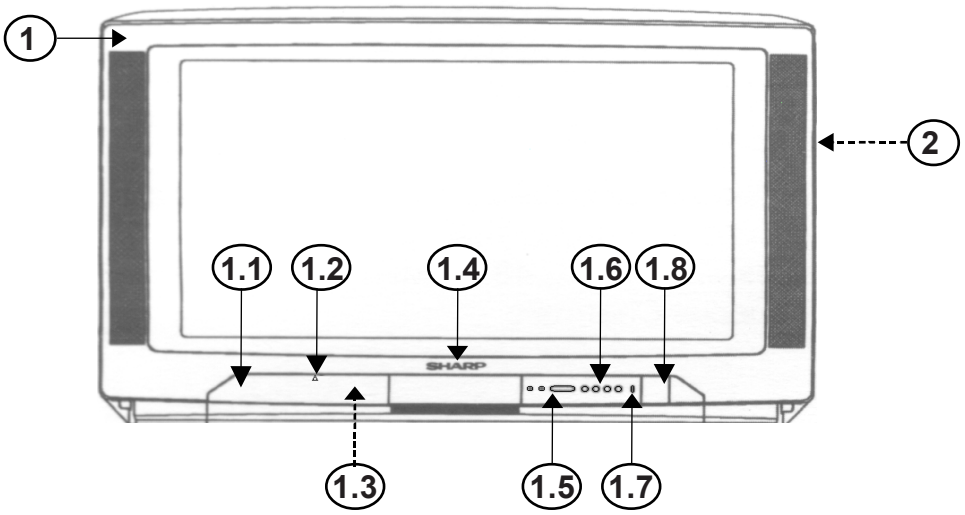

DIGITAL MODULE CHANGE PROCEDURE:

In case a change of Digital Board is required (K7270 <--> K7295) consider the below detailed information:

MODEL	BOARD	JL11 (See Fig.1)	CURRENT EPROM	CURRENT NVM FILE
70FW57E	DUNTK7270BMN4	WIRE FROM JL11 TO JL11	CH-IX1708CJE0 OR CH-IC1708CJE7 (K7270 with DDP 3310B-E4)	70FW57E6.IIC
81FW57E	DUNTK7270BMN1	WIRE FROM JL11 TO JL11	CH-IX1708CJE2	81FW57E9.IIC
70FW57E	DUNTK7295BMV4	WIRE FROM JL11 TO JL18	CH-IX1708CJE5	70FW57E5.IIC
81FW57E	DUNTK7295BMV4	WIRE FROM JL11 TO JL18	CH-IX1708CJE5	81FW57E8.IIC

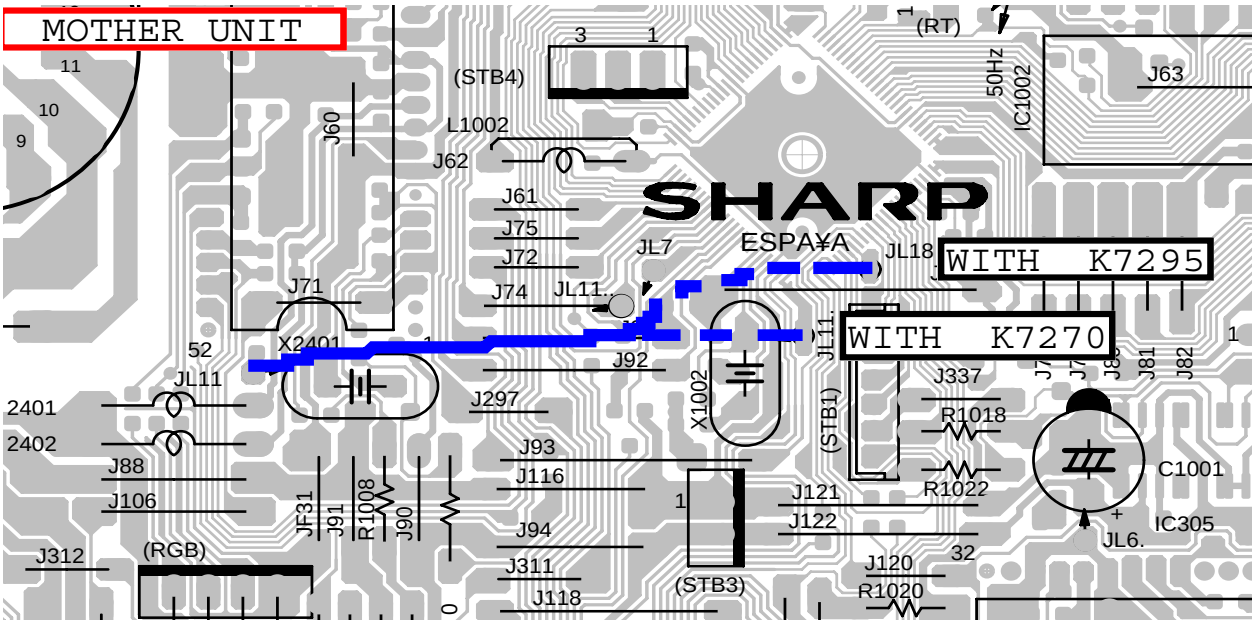

FIGURE 1.

SHARP



RECICLED PAPER

PRINTED BY: ON: